

Main Features:

- Frequency Range: 28 to 33 GHz.
- Typical values: P_{sat} 33 dBm, Gain 22 dB
- RF connectors (I/O): 2.92 mm
- Solder filtered pins for DC connection
- Several mounting options
- Gold plated compact aluminum housing
- Hi-reliability and dedicated screening/ environmental tests available under request

ERZ-HPA-2800-3300-33

The ERZ-HPA-2800-3300-33 is a High Power Amplifier providing an output power of 33 dBm gain of 22 dB. The compact size and modularity makes it ideal for a wide range of applications.

Typical applications:

- Industrial / Laboratory
- Satcom / Telecom
- Space / Aerospace / Military

Performance

Parameter	Value			Units
	Min	Typ	Max	
Frequency	28	-	33	GHz
Output Power (P _{1dB})	32	33	34	dBm
Gain	15	21	25	dB
Noise Figure	-	-	-	dB
VSWR input	-	2.0:1	-	-
VSWR output	-	2.5:1	-	-
DC Voltage	9	12	15	V
Power Consumption	-	26	-	W
Connectors	2.92 Female IN/OUT			-

Specifications at a case temperature of 25°C

Output Power at 1 dB Compression

Figure 1 shows output power at 1dB compression measurement as a function of frequency at room temperature (25°C).

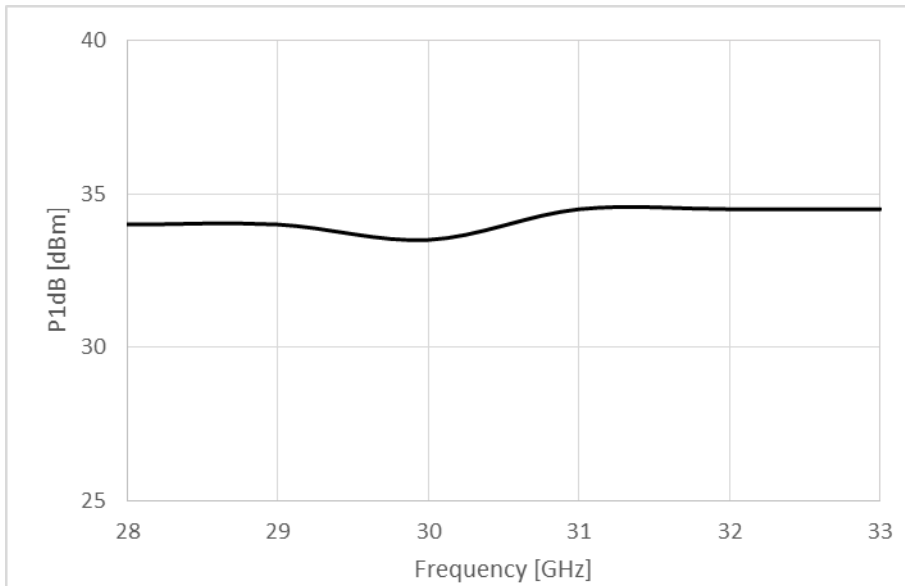


Figure 1: ERZ-HPA-2800-3300-33 P1dB

Small Signal Gain

Figure 2 shows the small signal gain measurement as a function of frequency at room temperature (25°C).

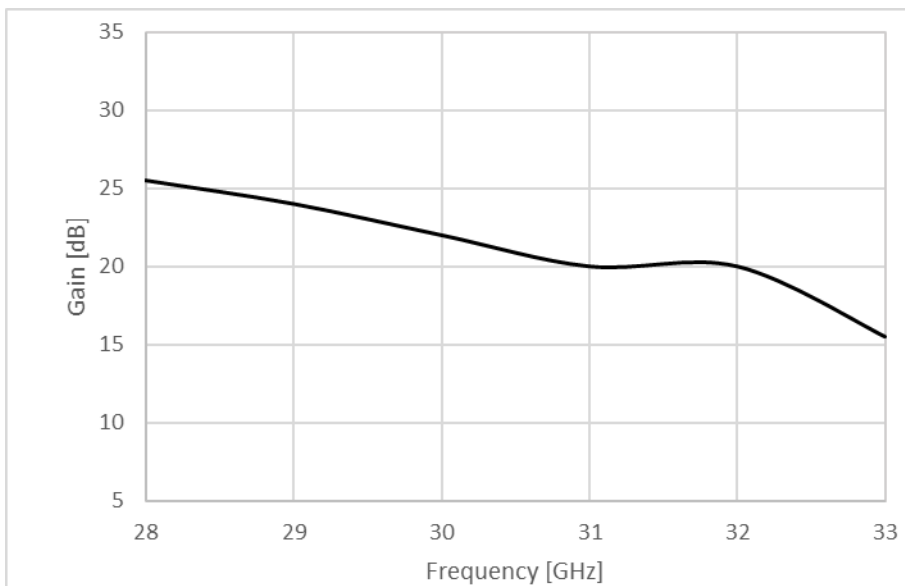


Figure 2: ERZ-HPA-2800-3300-33 Small Signal Gain

Measurements Conditions

All measurements provided in this report were performed at the following conditions:


Condition	Value
Temperature	25°C ± 1°C
Humidity	70% ± 10%
DUT Warm up time	30 min
Test equipment warm up time	1 hour

Absolute Maximum Ratings

Condition	Value
DC Voltage	+15 VDC
Maximum Input Power (CW)	18 dBm
Operation temperatura (at case)	-35°C to 70°C
Storage temperature	-45°C to 85°C

- Stress above these ratings may cause permanent damage to the device.
- It is final user responsibility to maintain the amplifier within the specified ranges.

Mechanics and Housing

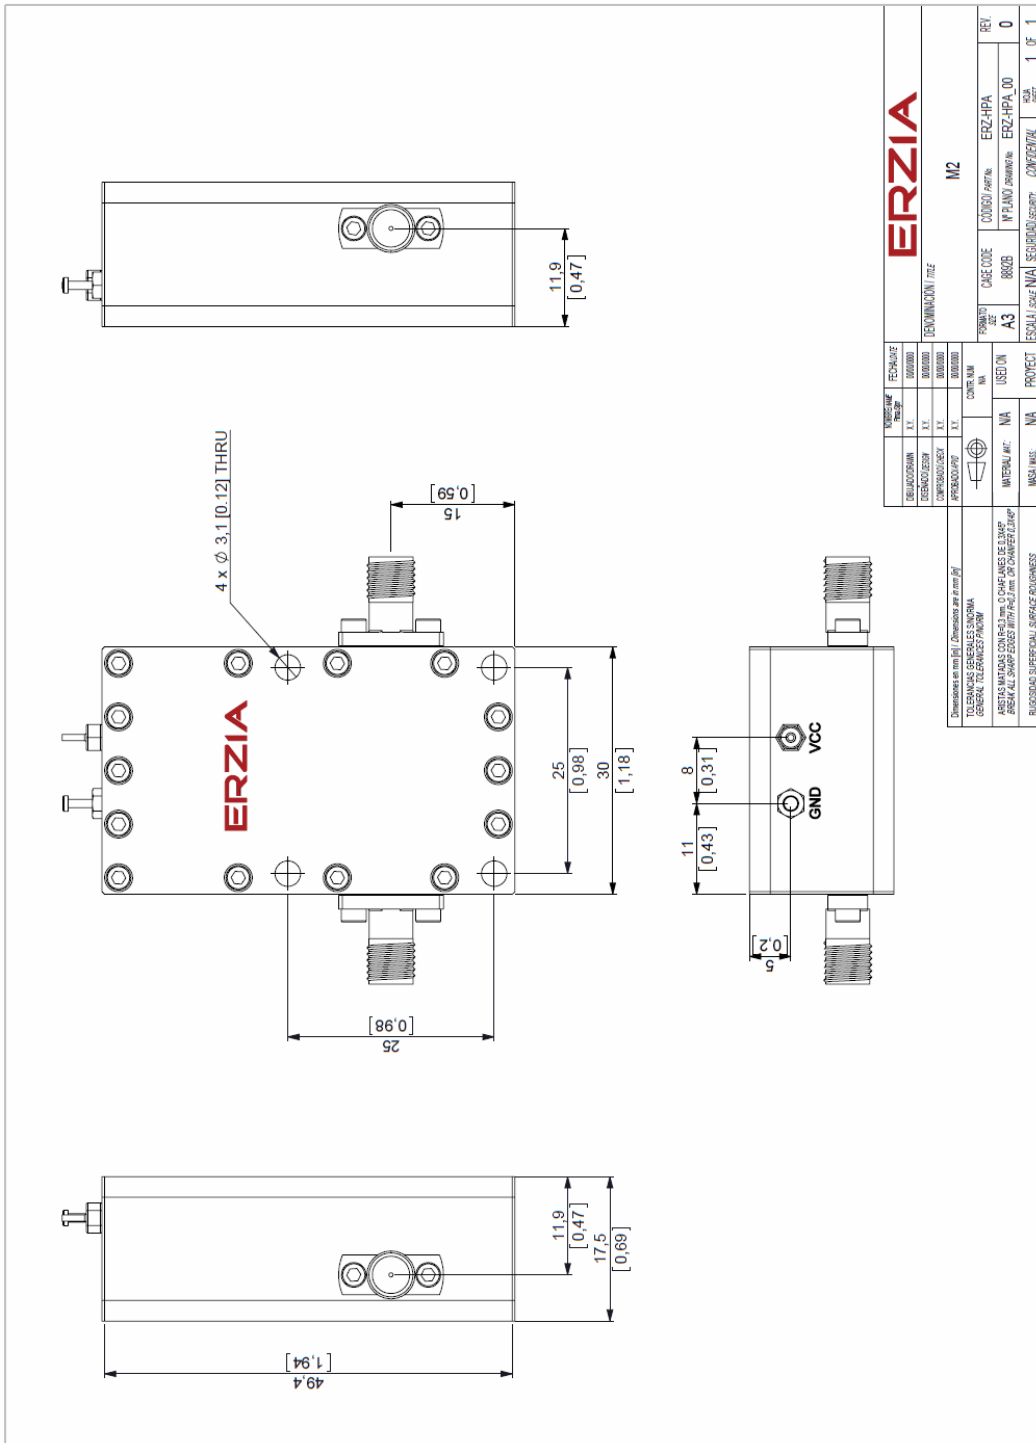

		M2	
DENOMINACION FILE			
NOMBRE TECHNIQUE ERZ-HPA	REFERENCIA ERZ-HPA	CASE CODE 8820B	CONTROL PART No. ERZ-HPA_00
MATERIAL NA	USE/ION NA	FORMATO A3	REV. 0
INSUMOS NA	PROYECT NA	ESCALA 1:1	HOJA 1 OF 1
CONFIDENTIAL			

Documentation and Test Reports

All modules are at least delivered with: Electrical Test Report, Certificate of Conformance, Certificate of Acceptance and Origin. Optionally, units can be environmentally tested (temperature, vibration...).

Option (HS): Heat Sink

A heat sink (HS) can be provided to allow the operation of Power Amplifiers. Please note that most power amplifiers need heat sink or appropriate heat dissipation strategy.

Space / Military Usage


Most of ERZIA's products are based on rad-hard technologies and can be manufactured and integrated according to MIL / ECSS or specific hi-rel standard-screening for space, aeronautics, military or specific hi-reliability usage.

Customization and Extended Performances

ERZIA can fully design or adapt one of the existing RF amplifiers designs according to your specifications. Please contact us for additional information.

Model Number Codification

MODEL NUMBER

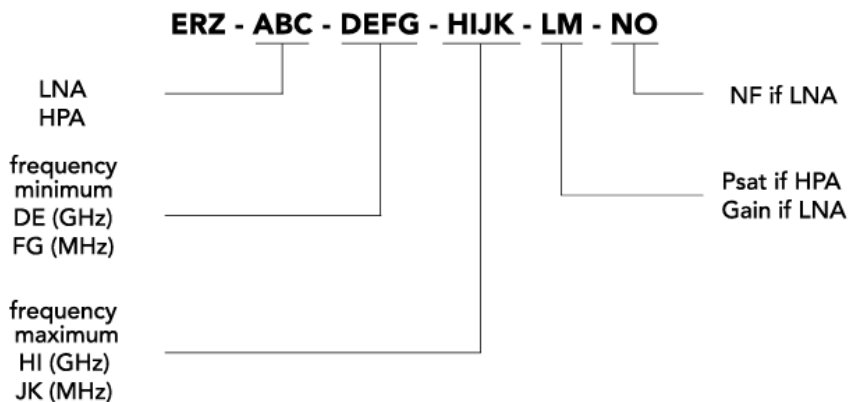

ERZIA

20160420_rev1.0

Copyright © 2016 Erzia Technologies. All rights reserved. This information is commercial and indicative, subject to change without notice

Tel: +34 942 76 46 45

sales.rf@erzia.com

www.erzia.com