

### Main Features:

- Frequency Range: 6 to 12 GHz.
- Typical values: Gain 35 dB, NF 2 dB
- RF connectors (I/O): SMA Female
- Solder filtered pins for DC connection
- Several mounting options
- Gold plated compact aluminum housing
- Hi-reliability and dedicated screening/ environmental tests available under request

### ERZ-LNA-0600-1200-35-3

The ERZ-LNA-0600-1200-35-3 is a Low Noise Amplifier providing a gain of 35 dB with a noise figure of 2 dB. The compact size and modularity makes it ideal for a wide range of applications.

### Typical applications:

- Industrial / Laboratory
- Satcom / Telecom
- Space / Aerospace / Military

### Performance

Parameter	Value			Units
	Min	Typ	Max	
Frequency	6	-	12	GHz
Output Power (P1dB)	19	20	22	dBm
OIP3	34	35	38	dBm
Small Signal Gain	33	35	37	dB
Gain Flatness	-	±1	-	dB
Noise Figure	-	2	2.5	dB
VSWR input	1.0:1	1.2:1	1.8:1	-
VSWR output	1.1:1	1.5:1	1.8:1	-
DC Voltage	9	12	15	V
Power Consumption	-	2	-	W
RF Connectors	SMA Female IN/OUT			-

Specifications at a case temperature of 25°C at 12 V

### Output Power at 1 dB Compression

Figure 1 shows output power at 1dB compression measurement as a function of frequency at room temperature (25°C).

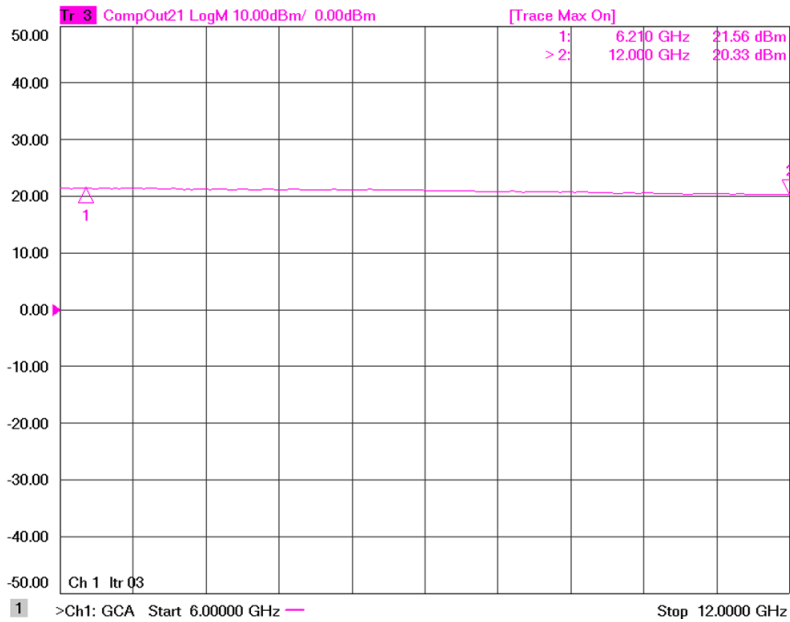


Figure 1: ERZ-LNA-0600-1200-35-3 P1dB

### Small Signal Gain

Figure 2 shows the small signal gain measurement as a function of frequency at room temperature (25°C).

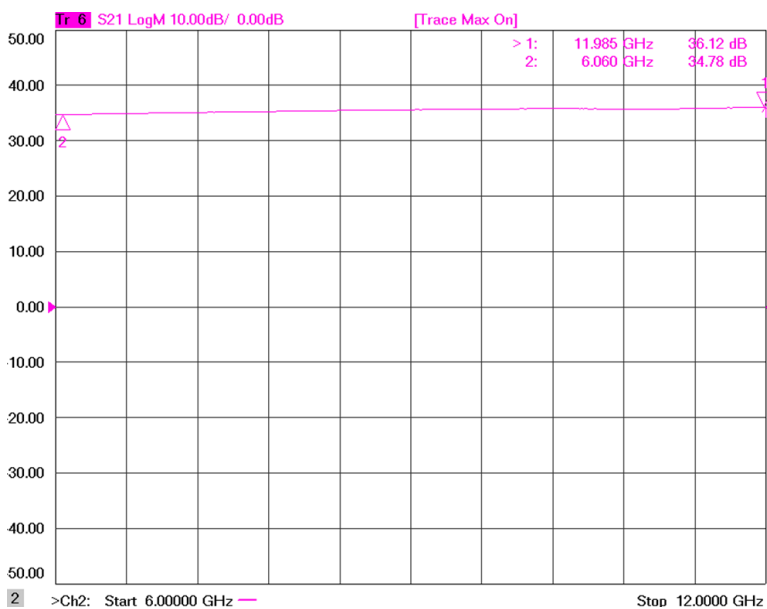


Figure 2: ERZ-LNA-0600-1200-35-3 Small Signal Gain

### Small Signal Gain Vs Temperature

Figure 3 shows small signal gain measurement as a function of frequency at low (-40°C), room (25°C) and high (80°C) temperatures.

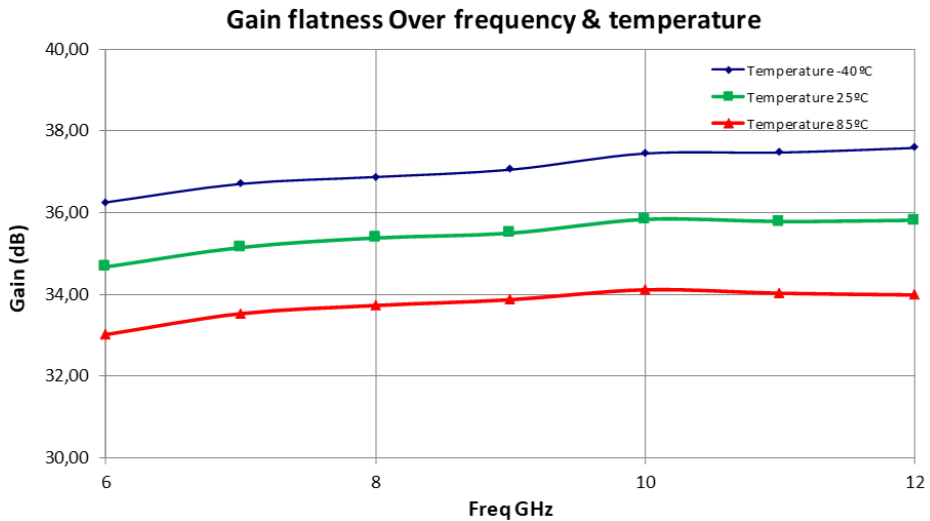


Figure 3: ERZ-LNA-0600-1200-35-3 Small Signal Gain Vs Temperature

### Noise Figure

Figure 4 shows the noise figure measurement as a function of frequency at room temperature (25°C).

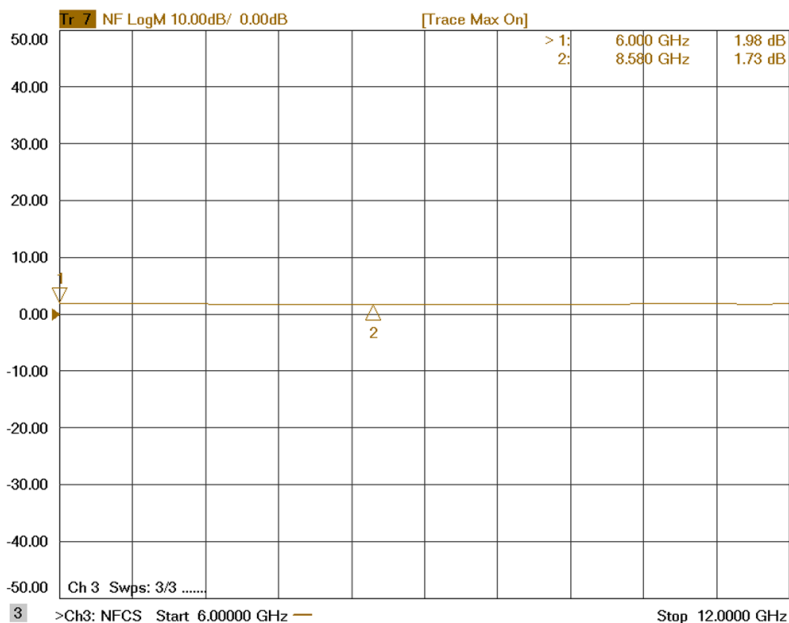


Figure 4: ERZ-LNA-0600-1200-35-3 Noise Figure

### Input and Output Matching

Figure 5 and Figure 6 show input (S11) and output (S22) VSWR as a function of frequency at room temperature (25°C).

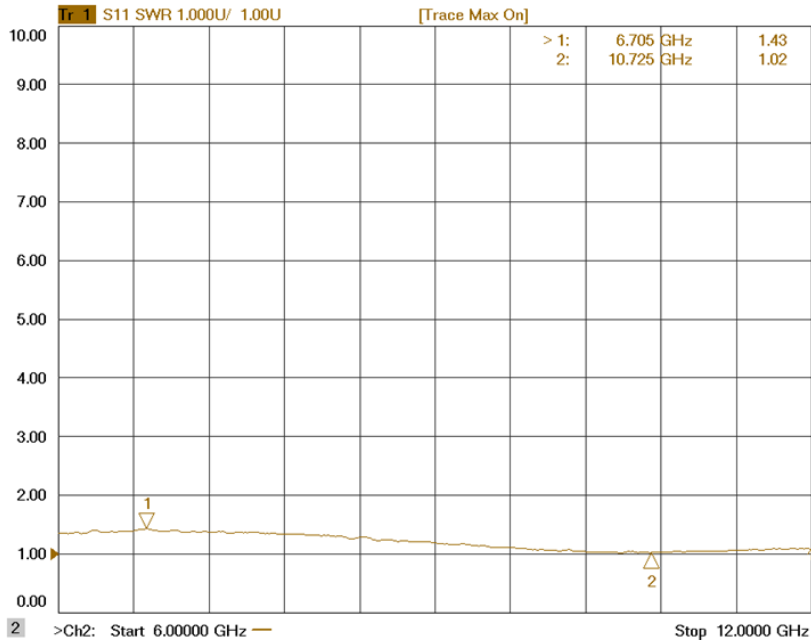


Figure 5: ERZ-LNA-0600-1200-35-3 Input Matching

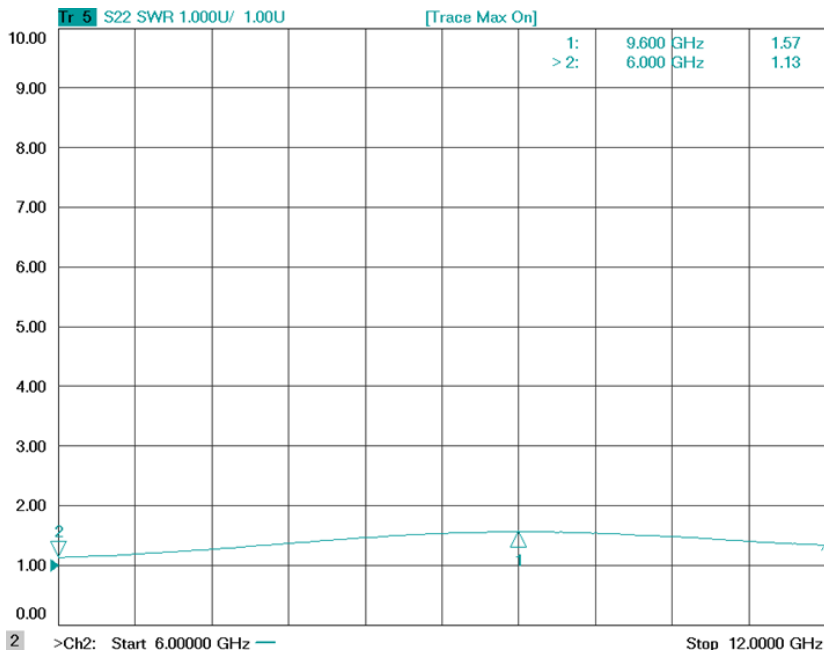


Figure 6: ERZ-LNA-0600-1200-35-3 Output Matching

### Absolute Maximum Ratings

Condition	Value
DC Voltage	+15 VDC
Maximum Input Power (CW)	24 dBm
Operation temperature (at case)	-40 to 85 °C
Storage temperature	-55 to 125 °C

- Stress above these ratings may cause permanent damage to the device.
- It is final user responsibility to maintain the amplifier within the specified ranges.

### Measurements Conditions

All measurements provided in this report were performed at the following conditions:

Condition	Value
Temperature (DUT ON)	25 °C ± 1°C
Humidity	44% ± 10%
DUT Warm up time	30 min
DUT minimum operation time	24 hours
Test equipment warm up time	2 hours
Additional temperature cycles in climatic chamber (DUT OFF)	-40°C to 85°C

### Environmental Specifications (By Design)

Operating Temperature:	-45 to +85 °C	(MIL-STD-810F, method 520.2)
Storage Temperature:	-55 to 125 °C	(MIL-STD-810F, method 520.2)
Vibration:	8g rms	(MIL-STD-810F, method 514.5)
Shock:	20g,11ms,saw-tooth	(MIL-STD-810F, method 516.5)
Acceleration:	15g	(MIL-STD-810F, method 513.5)

### RoHS & REACH Compliance

This part is compliant with EU 2011/65/UE RoHS (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) and REACH (Registration, Evaluation, Authorization and restriction of Chemical substances) directives.



### Mechanics and Housing

1	2	3	4	5	6																																																						
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%;">VER</td> <td style="width: 45%;">MODIFICACIÓN / MODIFICATION</td> <td style="width: 15%;">FECHA / DATE</td> <td style="width: 15%;">DIBUJADO / DRAWN</td> <td style="width: 10%;">COMP. CHECK</td> <td style="width: 10%;">APROB. APPROV.</td> </tr> <tr> <td style="text-align: center;">1</td> <td>Changed M2 holes to Ø2.54mm</td> <td style="text-align: center;">04/10/2019</td> <td style="text-align: center;">T.C.</td> <td style="text-align: center;">J.C.</td> <td style="text-align: center;">A.R.</td> </tr> </table>						VER	MODIFICACIÓN / MODIFICATION	FECHA / DATE	DIBUJADO / DRAWN	COMP. CHECK	APROB. APPROV.	1	Changed M2 holes to Ø2.54mm	04/10/2019	T.C.	J.C.	A.R.																																										
VER	MODIFICACIÓN / MODIFICATION	FECHA / DATE	DIBUJADO / DRAWN	COMP. CHECK	APROB. APPROV.																																																						
1	Changed M2 holes to Ø2.54mm	04/10/2019	T.C.	J.C.	A.R.																																																						
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 20%;">DESAIGUADO / DIS</td> <td style="width: 20%;">FECHA / DATE</td> <td colspan="4" style="text-align: center;"><b>ERZIA</b></td> </tr> <tr> <td style="width: 20%;">DISEÑO / DESIGN</td> <td style="width: 20%;">DIBUJO / DRAWING</td> <td colspan="4" style="text-align: center;">ERZ-LNA-0600-1200-35-3</td> </tr> <tr> <td style="width: 20%;">COMPROBADO / CHECKED</td> <td style="width: 20%;">T.C.</td> <td colspan="4" style="text-align: center;">TERMINACIONES / FINISH</td> </tr> <tr> <td style="width: 20%;">APROBADO / APPROVED</td> <td style="width: 20%;">A.R.</td> <td colspan="4" style="text-align: center;">PARTES / PARTS</td> </tr> <tr> <td colspan="2"></td> <td style="width: 20%;">CONTENIDO / CONTENT</td> <td colspan="3" style="text-align: center;">CODIGO PARTE / PART CODE</td> </tr> <tr> <td colspan="2"></td> <td style="width: 20%;">USO / USE</td> <td colspan="3" style="text-align: center;">MATERIAL / MATERIAL</td> </tr> <tr> <td colspan="2"></td> <td style="width: 20%;">ALUMINIO / ALUMINUM</td> <td colspan="3" style="text-align: center;">MESA / TABLE</td> </tr> <tr> <td colspan="2"></td> <td style="width: 20%;">SIN PINTURA / UNPAINTED</td> <td colspan="3" style="text-align: center;">ESCALA / SCALE</td> </tr> <tr> <td colspan="2"></td> <td style="width: 20%;">RUGOSIDAD SUPERIOR / SURFACE FINISH: Ra 0.8</td> <td colspan="3" style="text-align: center;">1 OF 1</td> </tr> </table>						DESAIGUADO / DIS	FECHA / DATE	<b>ERZIA</b>				DISEÑO / DESIGN	DIBUJO / DRAWING	ERZ-LNA-0600-1200-35-3				COMPROBADO / CHECKED	T.C.	TERMINACIONES / FINISH				APROBADO / APPROVED	A.R.	PARTES / PARTS						CONTENIDO / CONTENT	CODIGO PARTE / PART CODE					USO / USE	MATERIAL / MATERIAL					ALUMINIO / ALUMINUM	MESA / TABLE					SIN PINTURA / UNPAINTED	ESCALA / SCALE					RUGOSIDAD SUPERIOR / SURFACE FINISH: Ra 0.8	1 OF 1		
DESAIGUADO / DIS	FECHA / DATE	<b>ERZIA</b>																																																									
DISEÑO / DESIGN	DIBUJO / DRAWING	ERZ-LNA-0600-1200-35-3																																																									
COMPROBADO / CHECKED	T.C.	TERMINACIONES / FINISH																																																									
APROBADO / APPROVED	A.R.	PARTES / PARTS																																																									
		CONTENIDO / CONTENT	CODIGO PARTE / PART CODE																																																								
		USO / USE	MATERIAL / MATERIAL																																																								
		ALUMINIO / ALUMINUM	MESA / TABLE																																																								
		SIN PINTURA / UNPAINTED	ESCALA / SCALE																																																								
		RUGOSIDAD SUPERIOR / SURFACE FINISH: Ra 0.8	1 OF 1																																																								
<p><b>NOTES:</b></p> <ul style="list-style-type: none"> <li>•  : Mounting base.</li> <li>• Device can only be mounted on the indicated surface </li> </ul>																																																											

FD 0602015

### Documentation and Test Reports

All modules are at least delivered with: Electrical Test Report, Certificate of Conformance, Certificate of Acceptance and Origin. Optionally, units can be environmentally tested (temperature, vibration...).

### Option (HS): Heat Sink

A heat sink (HS) can be provided to allow the operation of Power Amplifiers. Please note that most power amplifiers need heat sink or appropriate heat dissipation strategy.

### Space / Military Usage

Most of ERZIA's products are based on rad-hard technologies and can be manufactured and integrated according to MIL / ECSS or specific hi-rel standard-screening for space, aeronautics, military or specific hi-reliability usage.

### Customization and Extended Performances

ERZIA can fully design or adapt one of the existing RF amplifiers designs according to your specifications. Please contact us for additional information.

### Model Number Codification

#### MODEL NUMBER



# ERZIA

20191220\_rev1.0

Copyright © 2019 ERZIA Technologies. All rights reserved. This information is commercial and indicative, subject to change without notice

Tel: +34 942 29 13 42

[sales@erzia.com](mailto:sales@erzia.com)

[www.erzia.com](http://www.erzia.com)