



ERZ-HPA-3300-4700-29

The ERZ-HPA-3300-4700-29 is a High Power Amplifier providing an output power of 29 dBm and a gain of 30 dB. The compact size and modularity makes it ideal for a wide range of applications.

Main Features:

- Frequency Range: 33 to 47 GHz.
- Typical values: Psat 29 dBm, Gain 30 dB
- RF connectors (I/O): 2.4 mm Female
- Solder filtered pins for DC connection
- Several mounting options
- Gold plated compact aluminum housing
- Hi-reliability and dedicated screening/ environmental tests available under request

Typical applications:

- Industrial / Laboratory
- Satcom / Telecom
- Space / Aerospace / Military

Performance

Parameter	Value			Units
	Min	Typ	Max	
Frequency	33	-	47	GHz
Output Power (Psat)	26	29	31	dBm
Gain	27	30	36	dB
Noise Figure	-	-	-	dB
VSWR input	1.2:1	2.0:1	2.1:1	-
VSWR output	1.0:1	1.3:1	1.6:1	-
DC Voltage	8	12	16	V
Power Consumption	-	11	-	W
Connectors	2.4 mm Female IN/OUT			-

Specifications at case temperature of 25°C

Output Saturation Power

Figure 1-1 shows the output saturation power measurement as a function of frequency at room temperature (25°C).

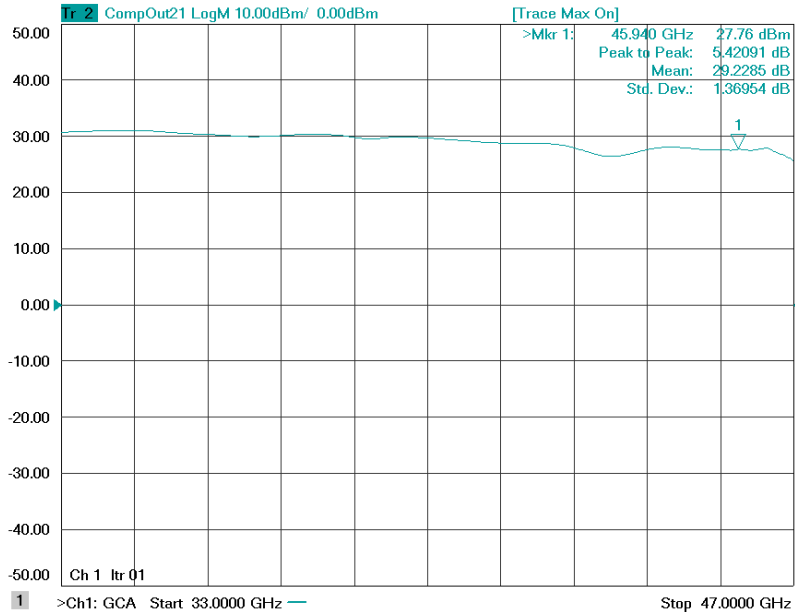


Figure 1-1: ERZ-HPA-3300-4700-29 Psat

Small Signal Gain

Figure 1-2 shows the small signal gain measurement as a function of frequency at room temperature (25°C).



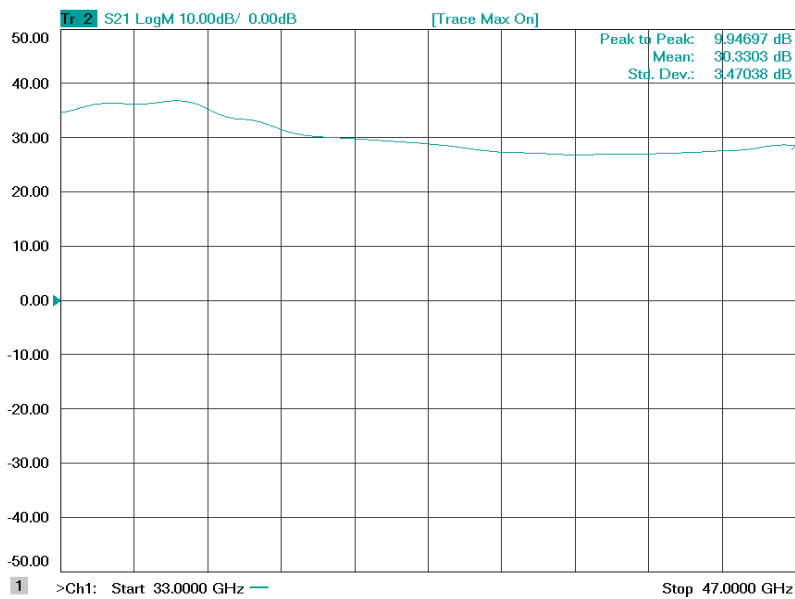


Figure 1-2: ERZ-HPA-3300-4700-29 Small Signal Gain

Input and Output Matching

Figure 1-4 and Figure 1-5 show input (S11) and output (S22) VSWR as a function of frequency at room temperature (25°C).

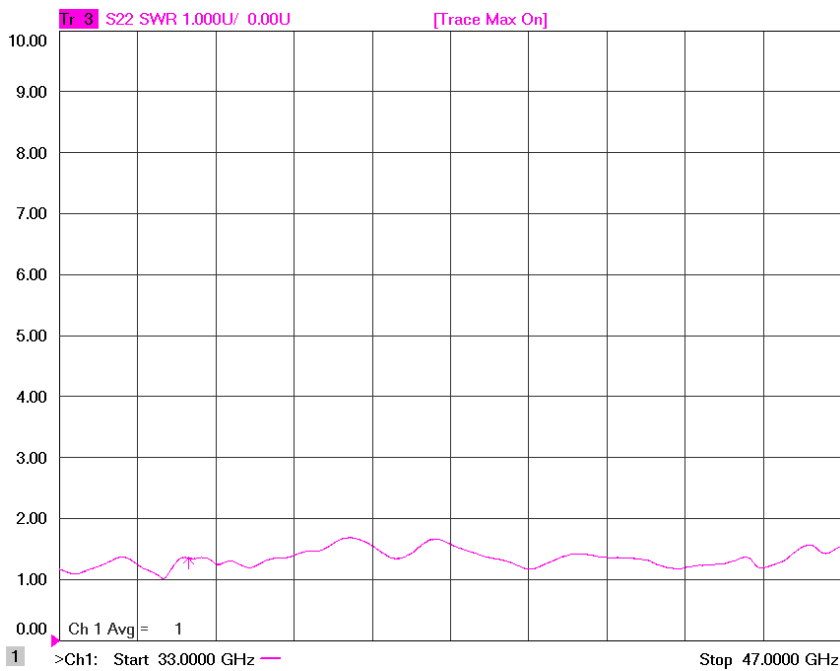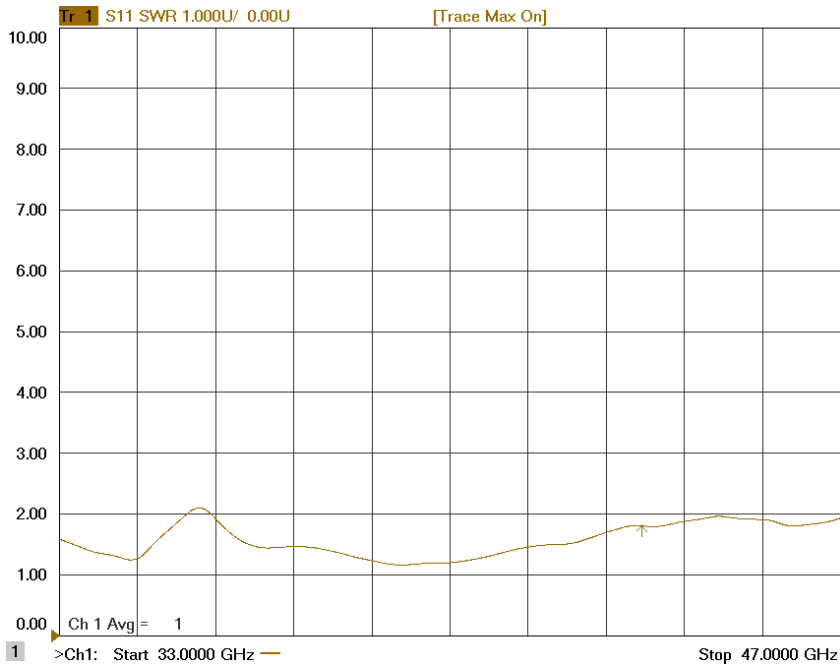

Measurements Conditions

All measurements provided in this report were performed at the following conditions:


Condition	Value
Temperature	25°C ± 1°C
Humidity	70% ± 10%
DUT Warm up time	30 min
Test equipment warm up time	1 hour

Absolute Maximum Ratings

Condition	Value
DC Voltage	+16 VDC
Maximum Input Power (CW)	10 dBm
Operation temperatura (at case)	-35°C to 70°C
Storage temperature	-45°C to 85°C

- Stress above these ratings may cause permanent damage to the device.
- It is final user responsibility to maintain the amplifier within the specified ranges.

Mechanics and Housing

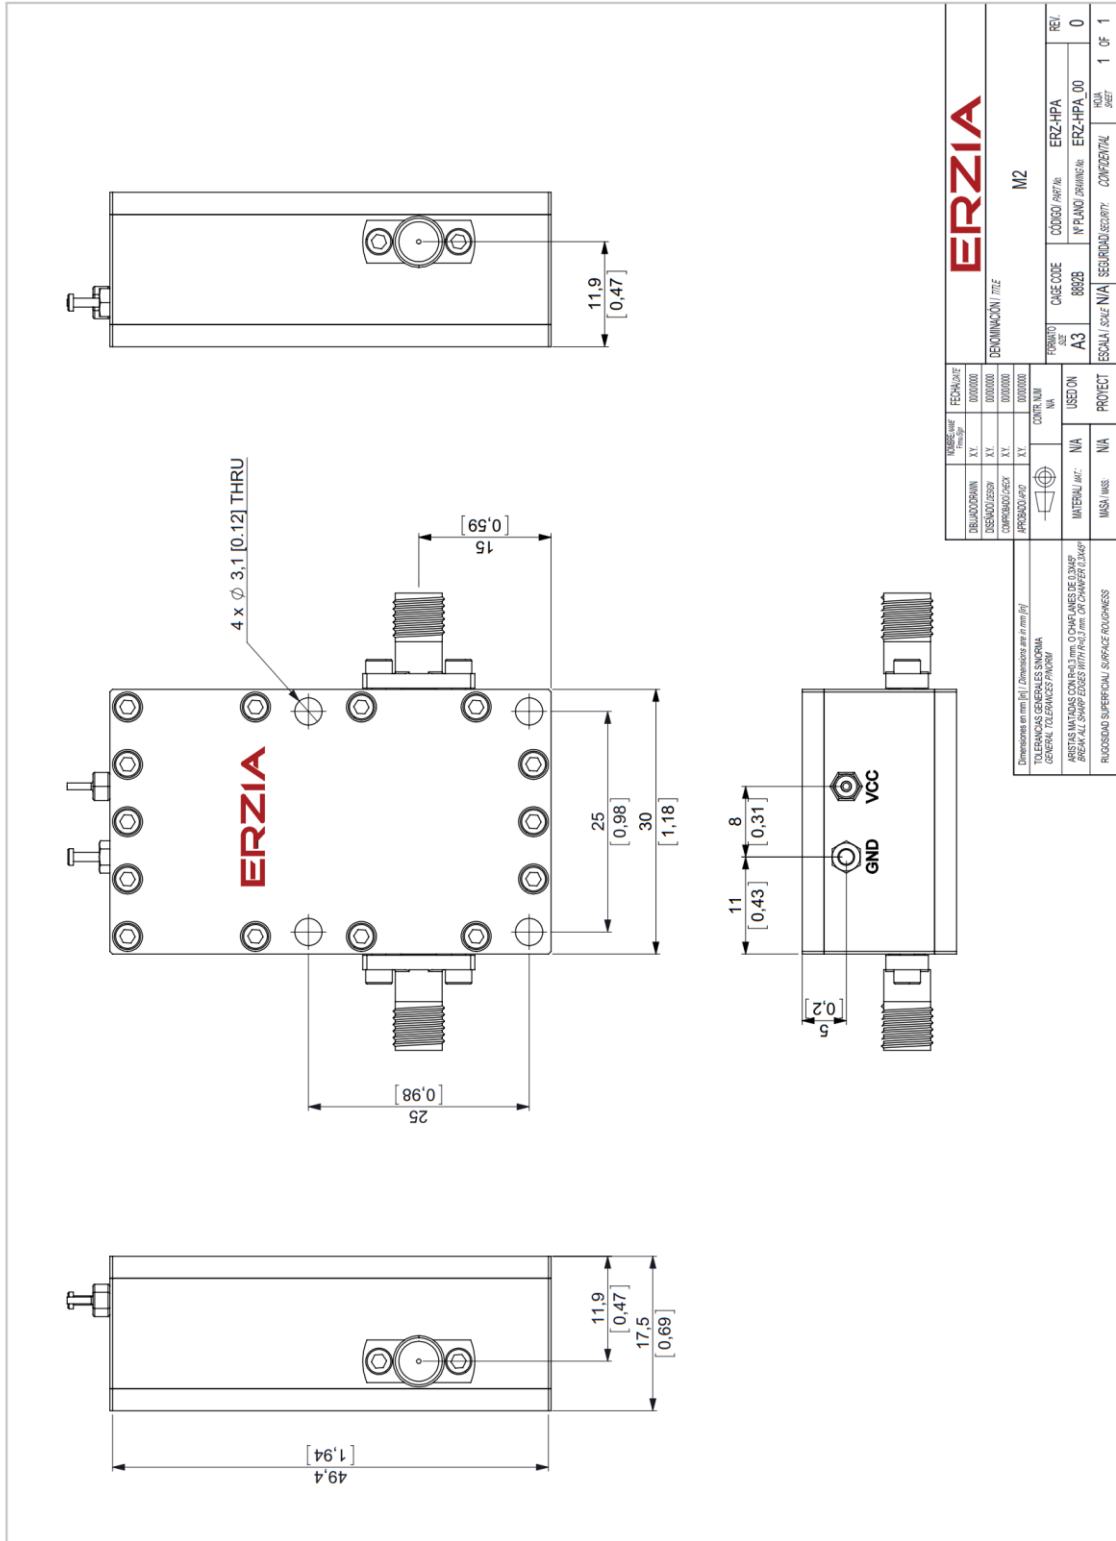

MATERIALE		FECHA DATE		ERZIA	
DESIGNACION	XY	000000	DENOMINACION / TITLE		
DESIGNADOR	XY	000000	M2		
CONSEJERO	XY	000000	PROYECTO	CASE CODE	REL.
PROYECTO	XY	000000	A3	8882B	0
COVER NUM	NA	000000	IN PLANO DRAWING N.	ERZ-HPA_00	
USADO ON	NA	000000	SECURITY CODE	COMPENITRAL	1 OF 1
INTERBUJ. INC.	NA	000000	ESCALA / SCALE	N/A	
MSA / MSA	NA	000000	PROTECT		

Dimensiones en mm (in) / Dimensiones and in mm (in)

TOLERANCIAS GENERALES: NORMAL GENERAL TOLERANCES: PANDIM

ARISTAS MUESTRAS CON R0,3 mm. CHAMFRINES DE 0,2 mm BREAK ALL SHARP EDGES WITH R=0,2 mm. CHAMFRILS 0,2 mm

RODEADOS SUPERFICIALES: SURFACE ROUGHNESS

Documentation and Test Reports

All modules are at least delivered with: Electrical Test Report, Certificate of Conformance, Certificate of Acceptance and Origin. Optionally, units can be environmentally tested (temperature, vibration...).

Option (HS): Heat Sink

A heat sink (HS) can be provided to allow the operation of Power Amplifiers. Please note that most power amplifiers need heat sink or appropriate heat dissipation strategy.

Space / Military Usage


Most of ERZIA's products are based on rad-hard technologies and can be manufactured and integrated according to MIL / ECSS or specific hi-rel standard-screening for space, aeronautics, military or specific hi-reliability usage.

Customization and Extended Performances

ERZIA can fully design or adapt one of the existing RF amplifiers designs according to your specifications. Please contact us for additional information.

Model Number Codification

MODEL NUMBER

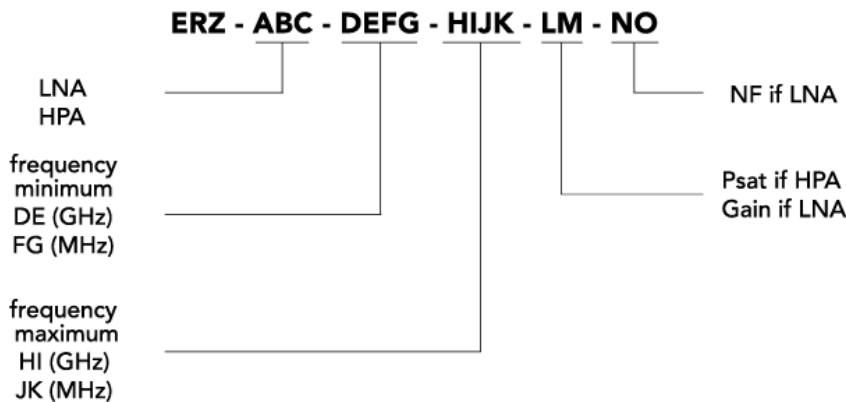

ERZIA

20160706_rev1.1

Copyright © 2016 Erzia Technologies. All rights reserved. This information is commercial and indicative, subject to change without notice

Tel: +34 942 29 13 42

sales.rf@erzia.com

www.erzia.com