



ERZ-HPA-2800-3300-33

The ERZ-HPA-2800-3300-33 is a High Power Amplifier providing an output power of 33 dBm gain of 21 dB. The compact size and modularity makes it ideal for a wide range of applications.

High Power Amplifier

ERZ-HPA-2800-3300-33

Main Features:

- Frequency Range: 28 to 33 GHz.
- Typical values: Pout 33 dBm, Gain 21 dB
- RF connectors (I/O): 2.92 mm
- Solder filtered pins for DC connection
- Several mounting options
- Gold platted compact aluminum housing
- Hi-reliability and dedicated screening/ environmental tests available under request

Typical applications:

- Industrial / Laboratory
- Satcom / Telecom
- Space / Aerospace / Military

| Parameter | Value | | | Units |
|---------------------|--------------------|------|-------|-------|
| | Min | Тур | Max | |
| Frequency | 28 | - | 33 | GHz |
| Output Power (P1dB) | 30 | 33 | 37 | dBm |
| Small Signal Gain | 15 | 21 | 28 | dB |
| Gain Flatness | - | ±4.5 | - | dB |
| Noise Figure | - | - | - | dB |
| VSWR input | - | - | 2.5:1 | - |
| VSWR output | - | - | 2.5:1 | - |
| DC Voltage | 9 | 12 | 15 | V |
| Power Consumption | - | 26 | - | W |
| Connectors | 2.92 Female IN/OUT | | - | |

Performance

Specifications at a case temperature of 25°C



ERZ-HPA-2800-3300-33

Output Power at 1 dB Compression

Figure 1 shows output power at 1dB compression measurement as a function of frequency at room temperature (25°C).



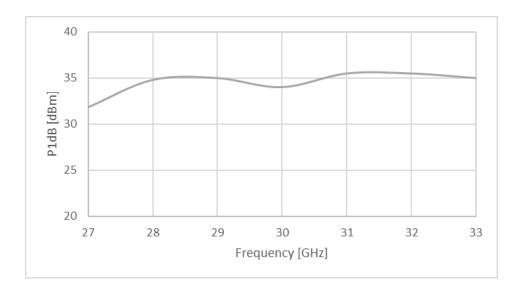


Figure 1: ERZ-HPA-2800-3300-33 P1dB

Small Signal Gain

Figure 2 shows the small signal gain measurement as a function of frequency at room temperature (25° C).

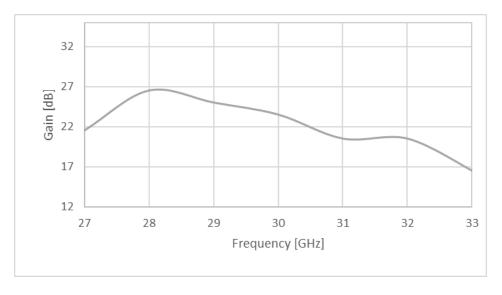



sales@erzia.com



ERZ-HPA-2800-3300-33

Absolute Maximum Ratings

| Condition | Value |
|---------------------------------|---------------|
| DC Voltage | +15 VDC |
| Maximum Input Power (CW) | 20 dBm |
| Operation temperature (at case) | -35 to 70 °C |
| Storage temperature | -55 to 125 °C |

- Stress above these ratings may cause permanent damage to the device.
- It is final user responsibility to maintain the amplifier within the specified ranges.

Measurements Conditions

All measurements provided in this report were performed at the following conditions:

| Condition | Value |
|---|---------------|
| Temperature (DUT ON) | 25 °C ± 1°C |
| Humidity | 44% ± 10% |
| DUT Warm up time | 30 min |
| DUT minimum operation time | 24 hours |
| Test equipment warm up time | 2 hours |
| Additional temperature cycles in climatic chamber (DUT OFF) | -40°C to 85°C |

Environmental Specifications (By Design)

| Operating Temperature: | -35 to +70 °C | (MIL-STD-810F, method 520.2) |
|------------------------|--------------------|------------------------------|
| Storage Temperature: | -55 to 125 °C | (MIL-STD-810F, method 520.2) |
| Vibration: | 8g rms | (MIL-STD-810F, method 514.5) |
| Shock: | 20g,11ms,saw-tooth | (MIL-STD-810F, method 516.5) |
| Acceleration: | 15g | (MIL-STD-810F, method 513.5) |

RoHS & REACH Compliance

This part is compliant with EU 2011/65/UE RoHS (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) and REACH (Registration, Evaluation, Authorization and restriction of Chemical substances) directives.



Tel: +34 942 29 13 42


sales@erzia.com



High Power Amplifier

ERZ-HPA-2800-3300-33

Mechanics and Housing

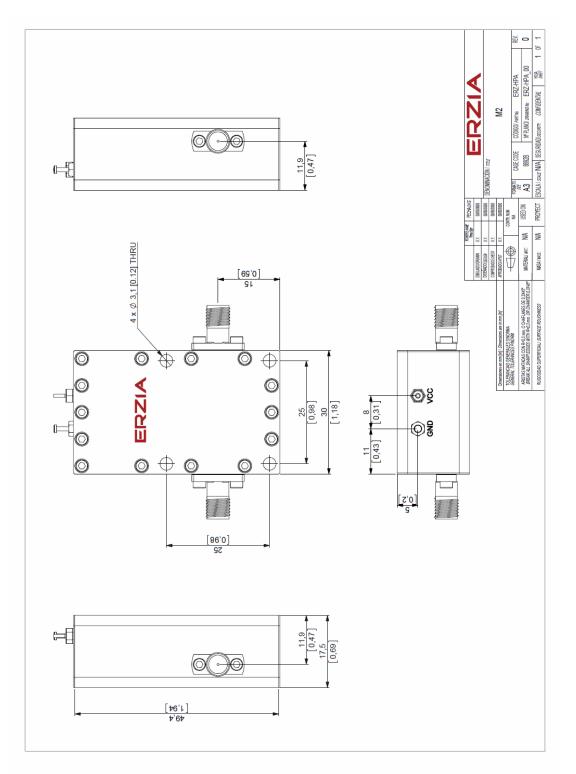

Tel: +34 942 29 13 42

sales@erzia.com



High Power Amplifier

ERZ-HPA-2800-3300-33

Documentation and Test Reports

All modules are at least delivered with: Electrical Test Report, Certificate of Conformance, Certificate of Acceptance and Origin. Optionally, units can be environmentally tested (temperature, vibration...).

Option (HS): Heat Sink

A heat sink (HS) can be provided to allow the operation of Power Amplifiers. Please note that most power amplifiers need heat sink or appropriate heat dissipation strategy.


Space / Military Usage

Most of ERZIA's products are based on rad-hard technologies and can be manufactured and integrated according to MIL / ECSS or specific hi-rel standard-screening for space, aeronautics, military or specific hi-reliability usage.

Customization and Extended Performances

ERZIA can fully design or adapt one of the existing RF amplifiers designs according to your specifications. Please contact us for additional information.

Model Number Codification

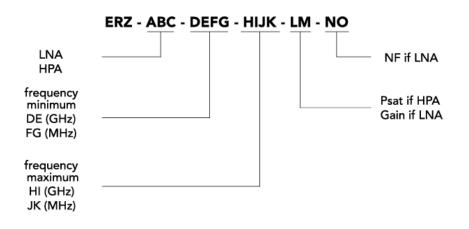

MODEL NUMBER

Tel: +34 942 29 13 42

sales@erzia.com

ERZIA

20191211_rev1.0

Copyright © 2019 Erzia Technologies. All rights reserved. This information is commercial and indicative, subject to change without notice

Tel: +34 942 29 13 42

sales@erzia.com