

ERZ-HPA-3300-3700-38



### ERZ-HPA-3300-3700-38

The ERZ-HPA-3300-3700-38 is a High Power Amplifier providing an output power of 7 W and a gain of 25 dB. The compact size and modularity makes it ideal for a wide range of applications.

### Main Features:

- Frequency Range: 33 to 77 GHz.
- Typical values: Psat 38.5 dBm, Gain 24 dB
- RF connectors (I/O): 2.92 mm Female
- Solder filtered pins for DC connection
- Several mounting options
- Gold platted compact aluminum housing
- Hi-reliability and dedicated screening/ environmental tests available under request

## Typical applications:

- Industrial / Laboratory
- Satcom / Telecom
- Space / Aerospace / Military

### Performance

Parameter	Value			Units
	Min	Тур	Max	
Frequency	33	ı	37	GHz
Output Power (Psat)	37	38.5	40	dBm
Small Signal Gain	21	25	28	dB
Gain Flatness	-	±2.5	-	dB
Noise Figure	-	-	-	dB
VSWR input	1.0:1	1.5:1	2.0:1	-
VSWR output	1.1:1	1.5:1	2.0:1	-
DC Voltage	20	24	28	V
Power Consumption		60		W
RF Connectors	2.92 mm Female			-

Specifications at case temperature of 25°C at 12V



ERZ-HPA-3300-3700-38

## **Output Saturation Power**

Figure 1 shows the output saturation power measurement as a function of frequency at room temperature (25°C).

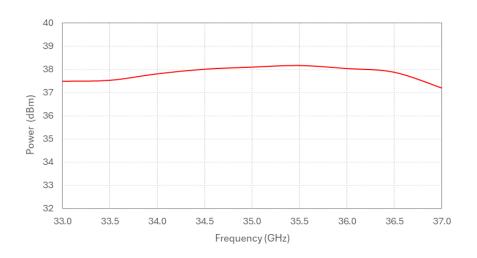


Figure 1: ERZ-HPA-3300-3700-38 Psat

## **Small Signal Gain**

Figure 2 shows the small signal gain measurement as a function of frequency at room temperature (25°C).

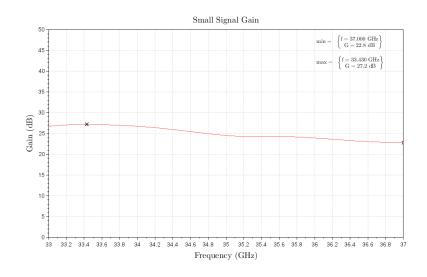


Figure 2: ERZ-HPA-3300-3700-38 Small Signal Gain



ERZ-HPA-3300-3700-38

## Input and Output Matching

Figure 3 shows input (S11) and output (S22) VSWR as a function of frequency at room temperature (25°C).

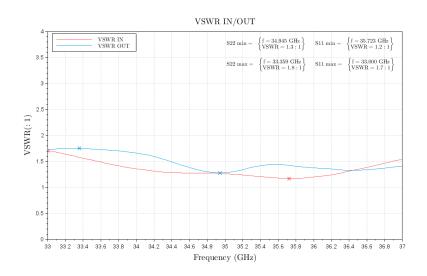


Figure 3: ERZ-HPA-3300-3700-38 Input and Output Matching



ERZ-HPA-3300-3700-38

### **Absolute Maximum Ratings**

Condition	Value	
DC Voltage	+28 VDC	
Maximum Input Power (CW)	30 dBm	
Operation temperature (at case)	-35 to 70 °C	
Storage temperature	-55 to 125 °C	

- Stress above these ratings may cause permanent damage to the device.
- It is final user responsibility to maintain the amplifier within the specified ranges.

### Measurements Conditions

All measurements provided in this report were performed at the following conditions:

Condition	Value
Temperature (DUT ON)	25 °C ± 1°C
Humidity	44% ± 10%
DUT Warm up time	30 min
DUT minimum operation time	24 hours
Test equipment warm up time	2 hours
Additional temperature cycles in climatic chamber (DUT OFF)	-40°C to 85°C

## **Environmental Specifications (By Design)**

Operating Temperature: -45 to +85 °C (MIL-STD-810F, method 520.2) Storage Temperature: -55 to 125 °C (MIL-STD-810F, method 520.2) Vibration: 8g rms (MIL-STD-810F, method 514.5) Shock: 20g,11ms,saw-tooth (MIL-STD-810F, method 516.5) Acceleration: 15g (MIL-STD-810F, method 513.5)

### **RoHS & REACH Compliance**

This part is compliant with EU 2011/65/UE RoHS (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) and REACH (Registration, Evaluation, Authorization and restriction of Chemical substances) directives.








ERZ-HPA-3300-3700-38

## Mechanics and Interfaces

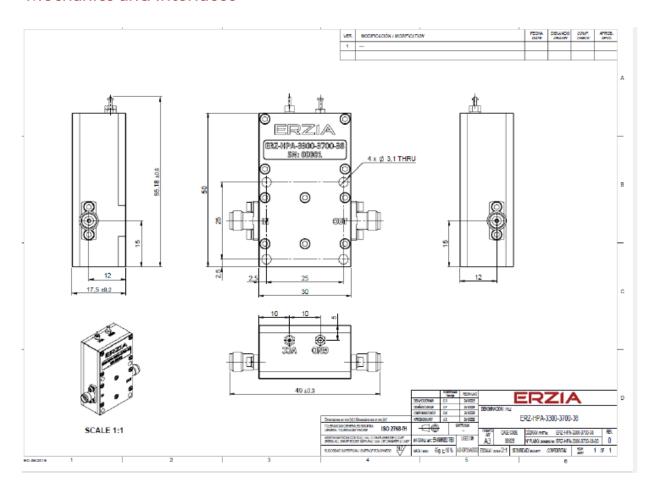

Parameter	Value	
Size	30x50x17.5 mm	
Weight	66 grams +/- 10%	
RF Input Connector	2.92 mm Female	
RF Output Connector	2.92 mm Female	
DC Connector	Filtered Pins	



ERZ-HPA-3300-3700-38

### **Documentation and Test Reports**

All modules are at least delivered with: Electrical Test Report, Certificate of Conformance, Certificate of Acceptance and Origin. Optionally, units can be environmentally tested (temperature, vibration...).

### Option (HS): Heat Sink

A heat sink (HS) can be provided to allow the operation of Power Amplifiers. Please note that most power amplifiers need heat sink or appropriate heat dissipation strategy.

### Space / Military Usage


Most of ERZIA's products are based on rad-hard technologies and can be manufactured and integrated according to MIL / ECSS or specific hi-rel standard-screening for space, aeronautics, military or specific hi-reliability usage.

### **Customization and Extended Performances**

ERZIA can fully design or adapt one of the existing RF amplifiers designs according to your specifications. Please contact us for additional information.

### Model Number Codification

#### MODEL NUMBER

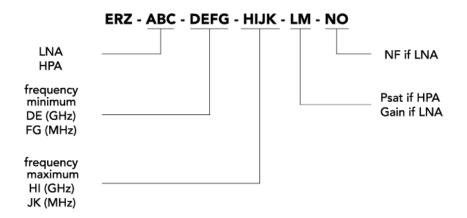



20251202\_rev1.1

Copyright © 2024 ERZIA Technologies. All rights reserved. This information is commercial and indicative, subject to change without notice