



### Main Features:

- Frequency Range: 2 to 24 GHz.
- Typical values: Gain 30 dB, NF 3 dB
- RF connectors (I/O): 2.92 mm Female
- Solder filtered pins for DC connection
- Several mounting options
- Gold plated compact aluminum housing
- Hi-reliability and dedicated screening/ environmental tests available under request

### ERZ-LNA-0200-2400-30-3

The ERZ-LNA-0200-2400-30-3 is a Low Noise Amplifier providing a gain of 30 dB with a noise figure of 3 dB. The compact size and modularity makes it ideal for a wide range of applications.

### Typical applications:

- Industrial / Laboratory
- Satcom / Telecom
- Space / Aerospace / Military

### Performance

| Parameter           | Value                 |       |       | Units |
|---------------------|-----------------------|-------|-------|-------|
|                     | Min                   | Typ   | Max   |       |
| Frequency           | 2                     | -     | 24    | GHz   |
| Output Power (P1dB) | -                     | 18    | 20    | dBm   |
| Small Signal Gain   | 28                    | 30    | 32    | dB    |
| Gain Flatness       | -                     | ±1    | -     | dB    |
| Noise Figure        | -                     | 3     | 4.5   | dB    |
| VSWR input          | 1.0:1                 | 1.2:1 | 2.0:1 | -     |
| VSWR output         | 1.1:1                 | 1.2:1 | 1.7:1 | -     |
| DC Voltage          | 9                     | 12    | 15    | V     |
| Power Consumption   | -                     | 1.5   | -     | W     |
| RF Connectors       | 2.92 mm Female IN/OUT |       |       | -     |

Specifications at a case temperature of 25°C at 12 V

### Saturation Power

Figure 1 shows saturation power measurement as a function of frequency at room temperature (25°C).

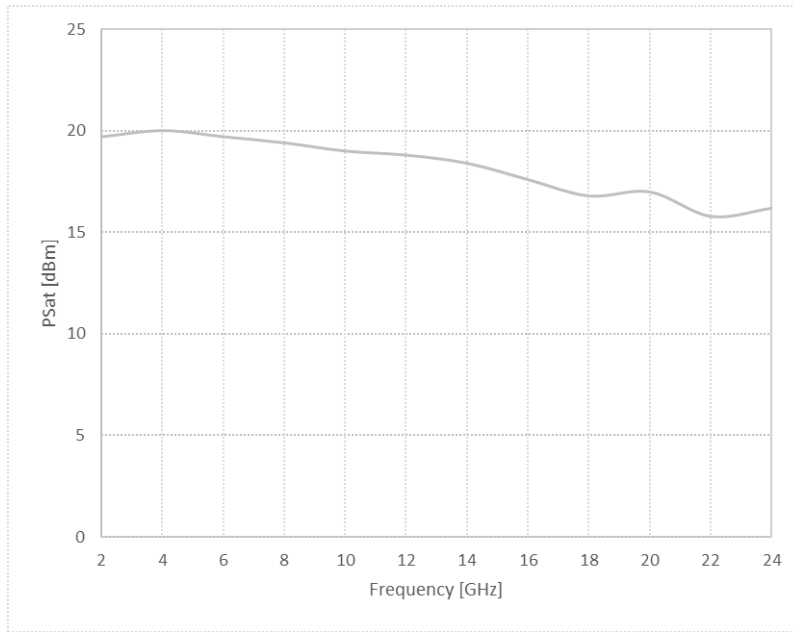


Figure 1: ERZ-LNA-0200-2400-30-3 Saturation Power

### Small Signal Gain

Figure 2 shows the small signal gain measurement as a function of frequency at room temperature (25°C).

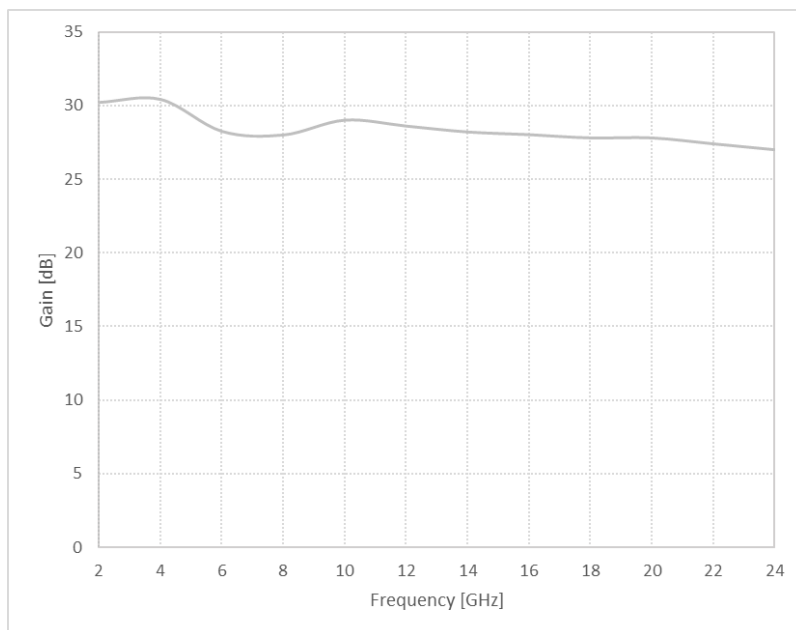


Figure 2: Figure 1: ERZ-LNA-0200-2400-30-3 Small Signal Gain

### Noise Figure

Figure 3 shows the noise figure measurement as a function of frequency at room temperature (25°C).

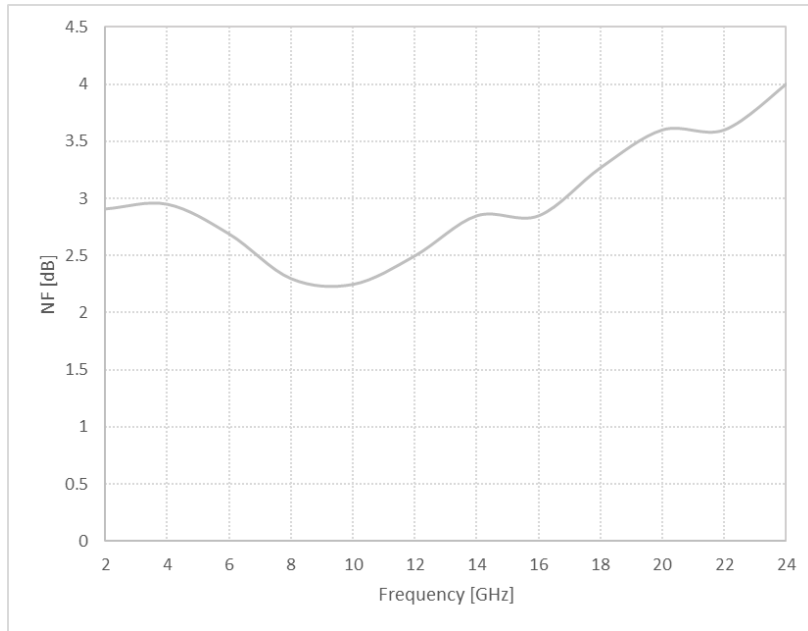


Figure 3: ERZ-LNA-0200-2400-30-3 Noise Figure

### Absolute Maximum Ratings

| Condition                       | Value         |
|---------------------------------|---------------|
| DC Voltage                      | +15 VDC       |
| Maximum Input Power (CW)        | 20 dBm        |
| Operation temperature (at case) | -55 to 85 °C  |
| Storage temperature             | -65 to 150 °C |

- Stress above these ratings may cause permanent damage to the device.
- It is final user responsibility to maintain the amplifier within the specified ranges.

### Environmental Specifications (By Design)


|                        |                    |                              |
|------------------------|--------------------|------------------------------|
| Operating Temperature: | -45 to +85 °C      | (MIL-STD-810F, method 520.2) |
| Storage Temperature:   | -55 to 125 °C      | (MIL-STD-810F, method 520.2) |
| Vibration:             | 8g rms             | (MIL-STD-810F, method 514.5) |
| Shock:                 | 20g,11ms,saw-tooth | (MIL-STD-810F, method 516.5) |
| Acceleration:          | 15g                | (MIL-STD-810F, method 513.5) |

### RoHS & REACH Compliance

This part is compliant with EU 2011/65/UE RoHS (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) and REACH (Registration, Evaluation, Authorization and restriction of Chemical substances) directives.



### Mechanics and Housing

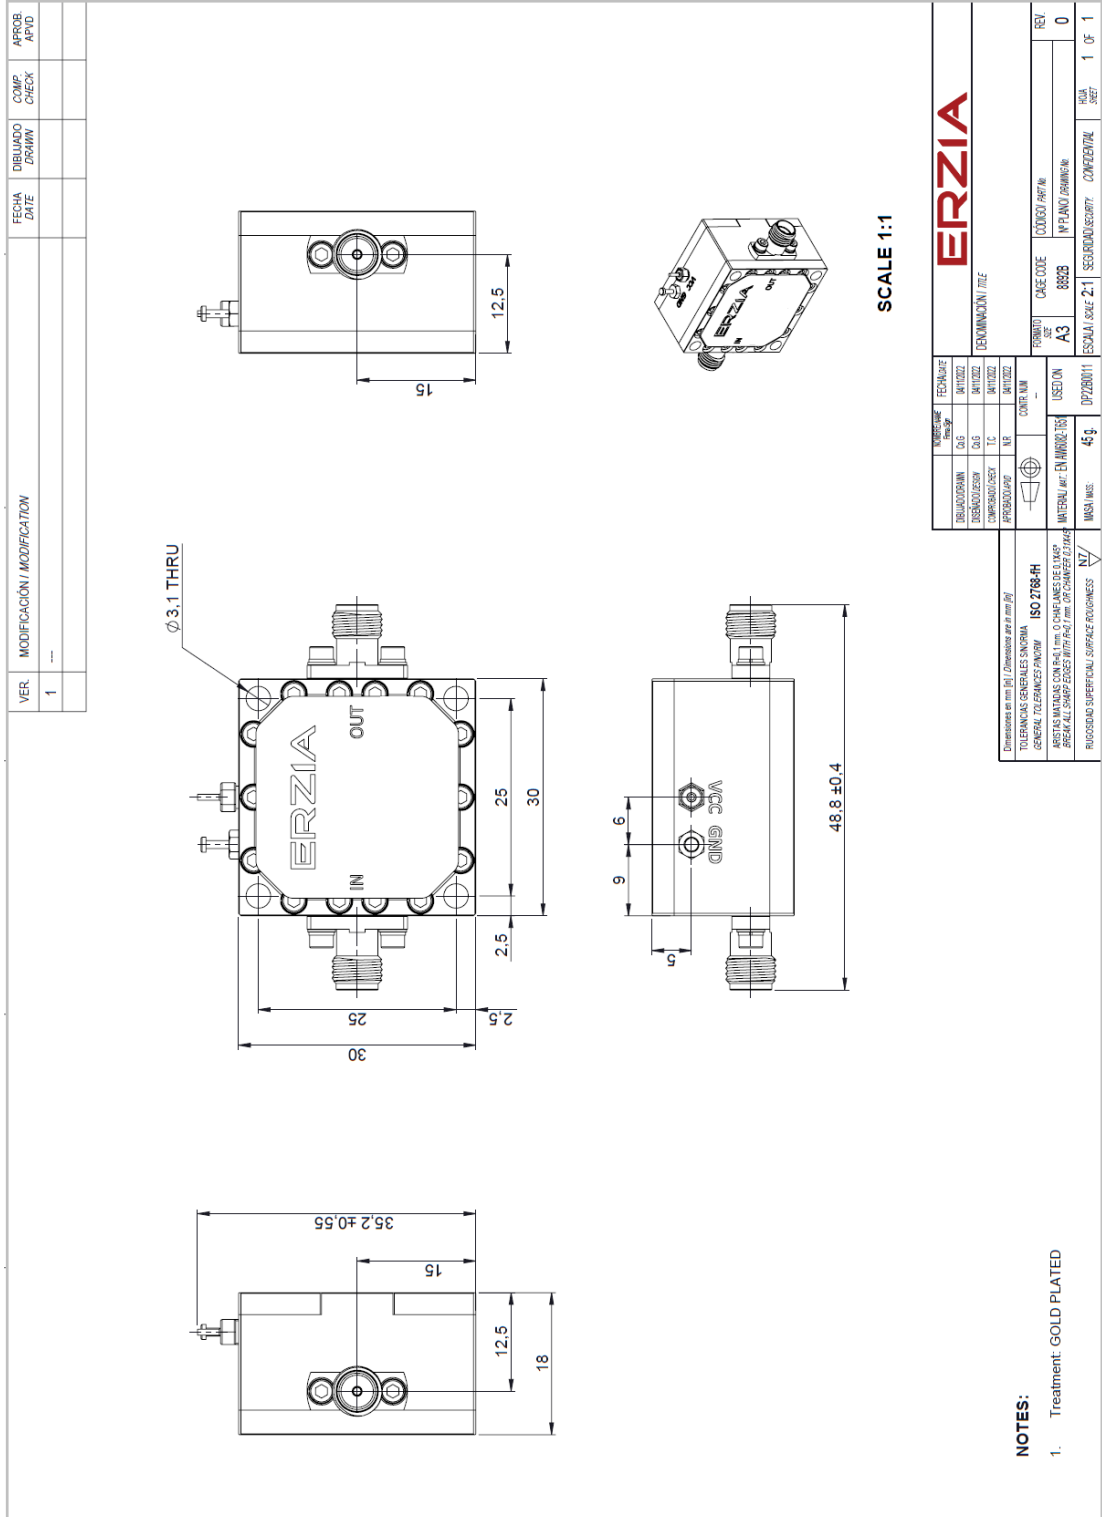

### Documentation and Test Reports

All modules are at least delivered with: Electrical Test Report, Certificate of Conformance, Certificate of Acceptance and Origin. Optionally, units can be environmentally tested (temperature, vibration...).

### Option (HS): Heat Sink

A heat sink (HS) can be provided to allow the operation of Power Amplifiers. Please note that most power amplifiers need heat sink or appropriate heat dissipation strategy.

### Space / Military Usage


Most of ERZIA's products are based on rad-hard technologies and can be manufactured and integrated according to MIL / ECSS or specific hi-rel standard-screening for space, aeronautics, military or specific hi-reliability usage.

### Customization and Extended Performances

ERZIA can fully design or adapt one of the existing RF amplifiers designs according to your specifications. Please contact us for additional information.

### Model Number Codification

#### MODEL NUMBER

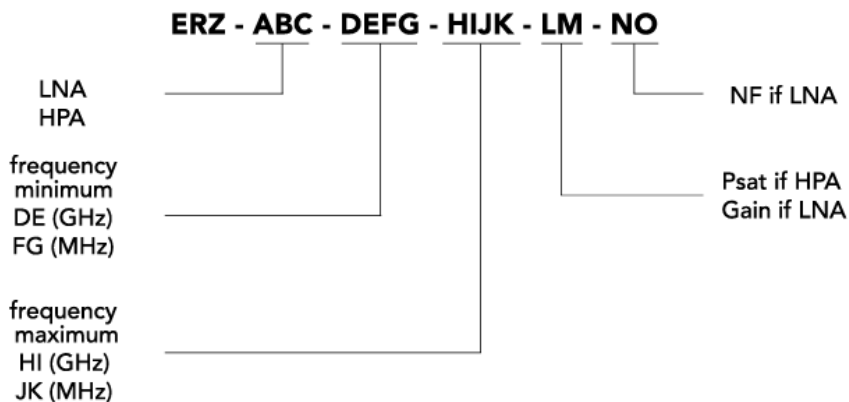

# ERZIA

20240708\_rev1.0

Copyright © 2017 ERZIA Technologies. All rights reserved. This information is commercial and indicative, subject to change without notice

Tel: +34 942 29 13 42

[sales@erzia.com](mailto:sales@erzia.com)

[www.erzia.com](http://www.erzia.com)