



**Main Features:**

- Frequency Range: 0.1 to 4 GHz.
- Typical values: P1dB 27 dBm, Gain 32 dB
- RF connectors (I/O): SMA Female
- Solder filtered pins for DC connection
- Several mounting options
- Gold plated compact aluminum housing
- Hi-reliability and dedicated screening/  
environmental tests available under request

**ERZ-HPA-0010-0400-25-E**

The ERZ-HPA-0010-0400-25 is a High Power Amplifier providing an output power of 27 dBm and a gain of 32 dB. The compact size and modularity makes it ideal for a wide range of applications.

**Typical applications:**

- Industrial / Laboratory
- Satcom / Telecom
- Space / Aerospace

**Performance**

| Parameter           | Value             |       |       | Units |
|---------------------|-------------------|-------|-------|-------|
|                     | Min               | Typ   | Max   |       |
| Frequency           | 0.1               | -     | 4     | GHz   |
| Output Power (P1dB) | 25                | 27    | 29    | dBm   |
| Small Signal Gain   | 30                | 32    | 35    | dB    |
| Gain Flatness       | -                 | ±1.5  | -     | dB    |
| Noise Figure        | -                 | -     | -     | dB    |
| VSWR input          | 1.1:1             | 1.3:1 | 2.0:1 | -     |
| VSWR output         | 1.1:1             | 1.2:1 | 2.0:1 | -     |
| DC Voltage          | 9                 | 12    | 15    | V     |
| Power Consumption   | -                 | 5.6   | -     | W     |
| RF Connectors       | SMA Female IN/OUT |       |       | -     |

Specifications at a case temperature of 25°C at 12 V

Output Power at 1 dB Compression

Figure 1 shows output power at 1dB compression measurement as a function of frequency at room temperature (25°C).

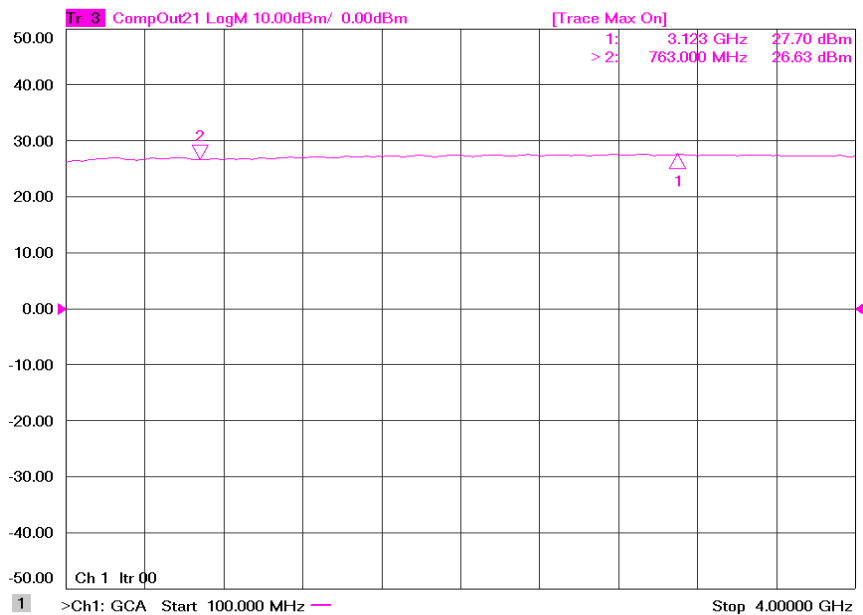


Figure 1: ERZ-HPA-0010-0400-25-E P1dB

Small Signal Gain

Figure 2 shows the small signal gain measurement as a function of frequency at room temperature (25°C).

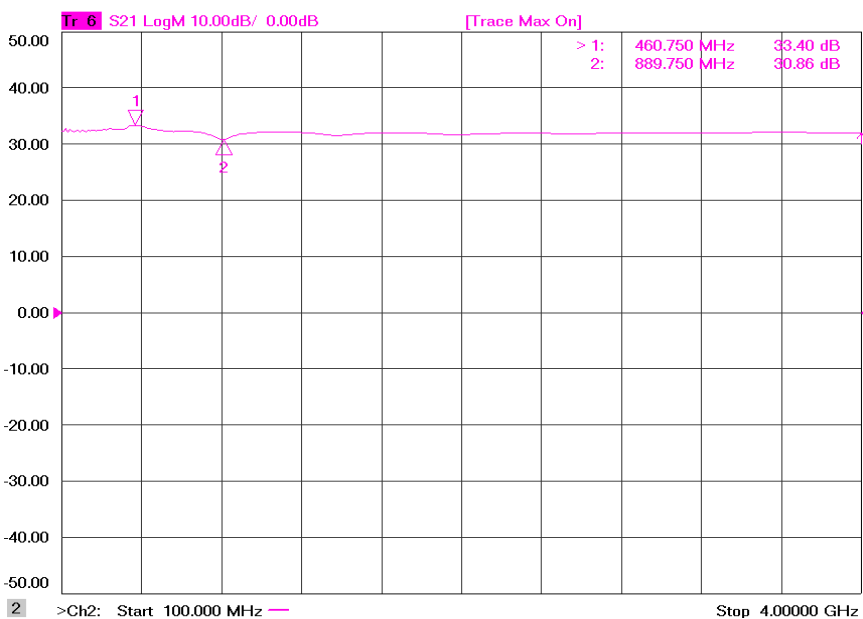


Figure 2: ERZ-HPA-0010-0400-25-E Small Signal Gain

Small Signal Gain Vs Temperature

Figure 3 shows small signal gain measurement as a function of frequency at low (-45°C), room (25°C) and high (85°C) temperatures.

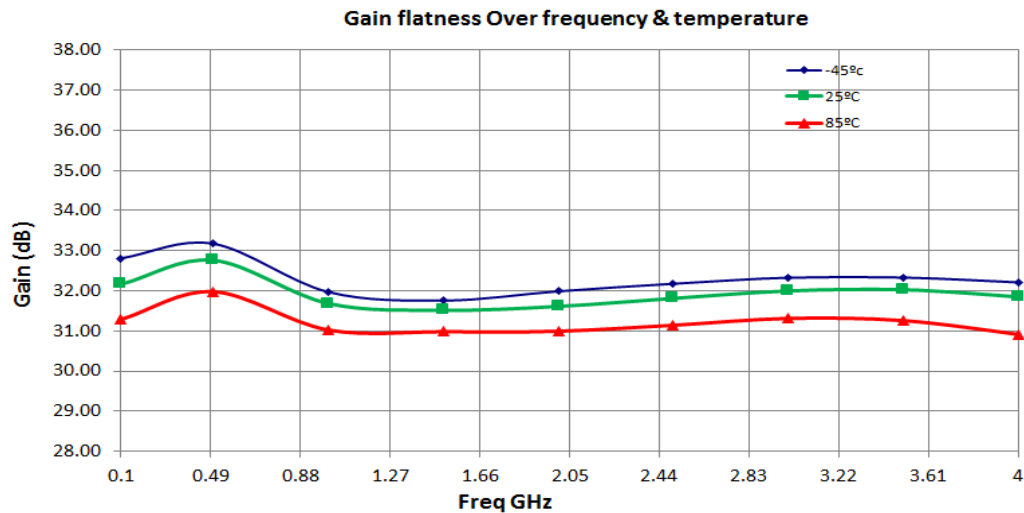


Figure 3: ERZ-HPA-0010-0400-25-E Small Signal Gain Vs Temperature

Input and Output Matching

Figure 4 and Figure 5 show input (S11) and output (S22) VSWR as a function of frequency at room temperature (25°C).

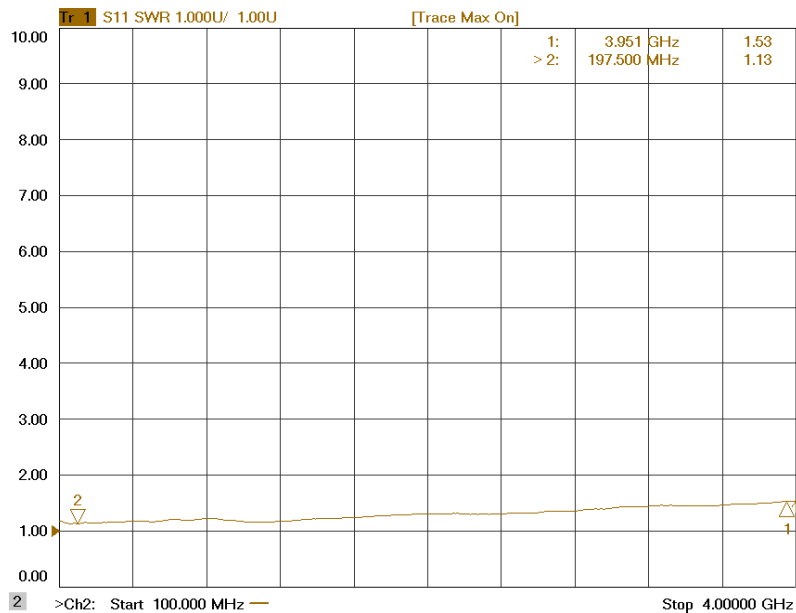


Figure 4: ERZ-HPA-0010-0400-25-E Input Matching

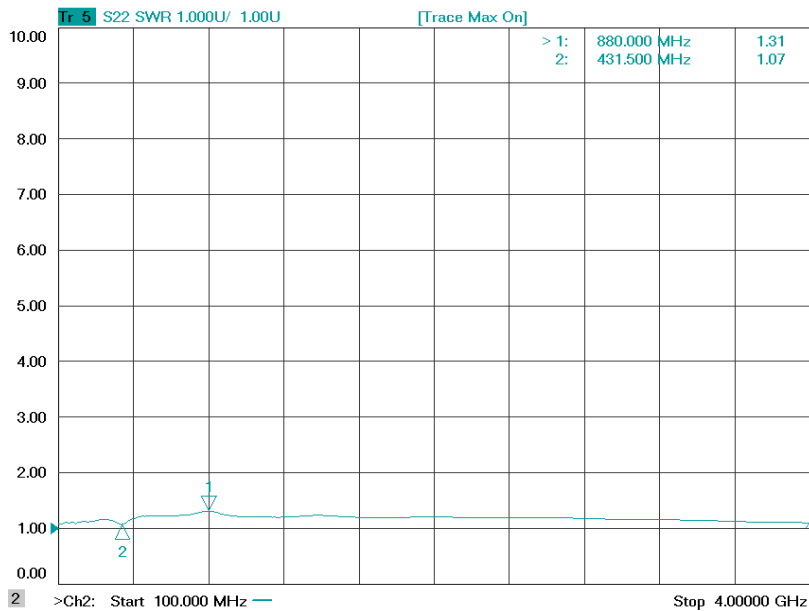


Figure 5: ERZ-HPA-0010-0400-25-E Output Matching

Absolute Maximum Ratings

| Condition                       | Value         |
|---------------------------------|---------------|
| DC Voltage                      | +15 VDC       |
| Maximum Input Power (CW)        | 23 dBm        |
| Operation temperature (at case) | -45 to 85 °C  |
| Storage temperature             | -55 to 125 °C |

- Stress above these ratings may cause permanent damage to the device.
- It is final user responsibility to maintain the amplifier within the specified ranges.

Measurements Conditions

All measurements provided in this report were performed at the following conditions:

| Condition                                                   | Value         |
|-------------------------------------------------------------|---------------|
| Temperature (DUT ON)                                        | 25 °C ± 1°C   |
| Humidity                                                    | 44% ± 10%     |
| DUT Warm up time                                            | 30 min        |
| DUT minimum operation time                                  | 24 hours      |
| Test equipment warm up time                                 | 2 hours       |
| Additional temperature cycles in climatic chamber (DUT OFF) | -40°C to 85°C |

Environmental Specifications (By Design)


|                        |                    |                              |
|------------------------|--------------------|------------------------------|
| Operating Temperature: | -45 to +85 °C      | (MIL-STD-810F, method 520.2) |
| Storage Temperature:   | -55 to 125 °C      | (MIL-STD-810F, method 520.2) |
| Vibration:             | 8g rms             | (MIL-STD-810F, method 514.5) |
| Shock:                 | 20g,11ms,saw-tooth | (MIL-STD-810F, method 516.5) |
| Acceleration:          | 15g                | (MIL-STD-810F, method 513.5) |

RoHS & REACH Compliance

This part is compliant with EU 2011/65/UE RoHS (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) and REACH (Registration, Evaluation, Authorization and restriction of Chemical substances) directives.



## Mechanics and Housing

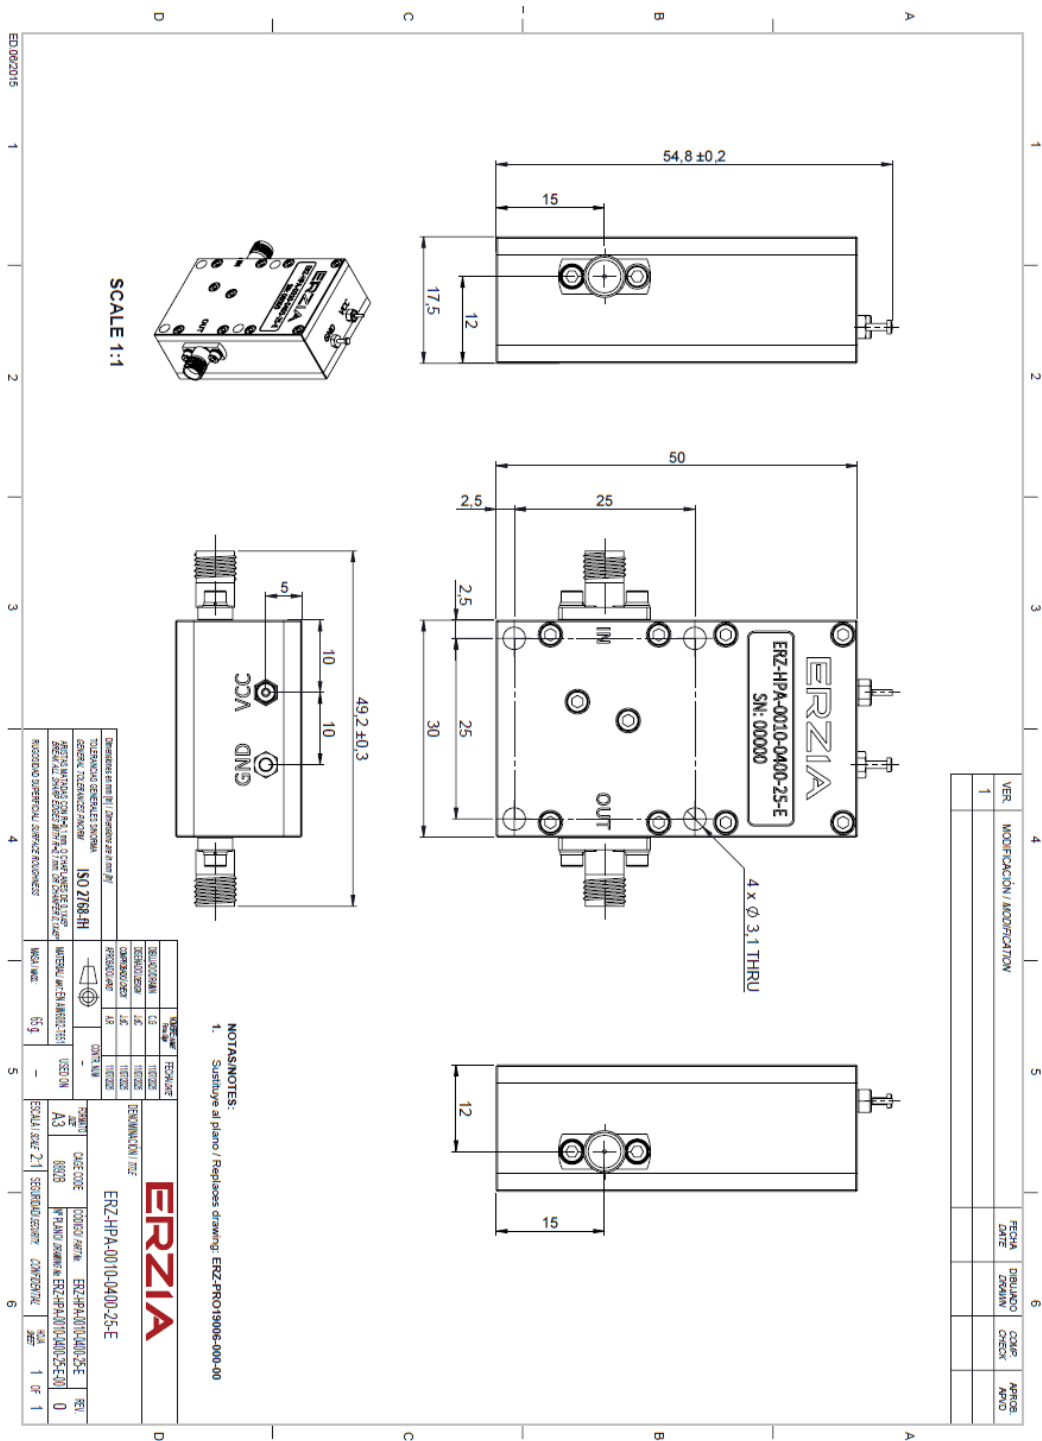

Documentation and Test Reports

All modules are at least delivered with: Electrical Test Report, Certificate of Conformance, Certificate of Acceptance and Origin. Optionally, units can be environmentally tested (temperature, vibration...).

Option (HS): Heat Sink

A heat sink (HS) can be provided to allow the operation of Power Amplifiers. Please note that most power amplifiers need heat sink or appropriate heat dissipation strategy.

Space / Hi-Rel Usage


Most of ERZIA’s products are based on rad-hard technologies and can be manufactured and integrated according to MIL / ECSS or specific hi-rel standard-screening for space, aeronautics, or specific hi-reliability usage.

Customization and Extended Performances

ERZIA can fully design or adapt one of the existing RF amplifiers designs according to your specifications. Please contact us for additional information.

Model Number Codification

MODEL NUMBER

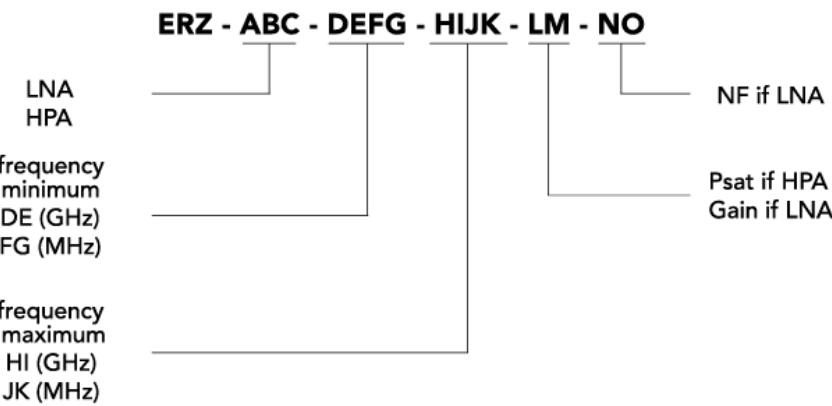

# ERZIA

20260818\_rev1.2

Copyright © 2026 ERZIA Technologies. All rights reserved. This information is commercial and indicative, subject to change without notice

Tel: +34 942 29 13 42

[sales@erzia.com](mailto:sales@erzia.com)

[www.erzia.com](http://www.erzia.com)