ERZIA

DATASHEET

High Power Amplifier

ERZ-HPA-3000-3100-46

Main Features:

- Frequency Range: 30 to 31 GHz.
- Typical values: Psat 44 dBm, Gain 47 dB
- RF connectors (I/O): 2.92mm (F) / WR28
- TTL ON/OFF Control
- Power, current and temperature monitoring
- Compact aluminum housing
- Hi-reliability and dedicated screening/ environmental tests available under request

ERZ-HPA-3000-3100-46

The ERZ-HPA-3000-3100-46 is a High Power Amplifier providing an output power of 44 dBm and a gain of 47 dB. The compact size and modularity makes it ideal for a wide range of applications.

Typical applications:

- Industrial / Laboratory
- Satcom / Telecom
- Space / Aerospace

Performance

Parameter	Value			Units
	Min	Typ	Max	
Frequency	30	-	31	GHz
Output Power (Psat) @CW	44	44.5	45	dBm
Small Signal Gain	44	47	49	dB
Gain Flatness	-	±1.5	-	dB
Switch ON/OFF Time	-	200/1000	-	ns
VSWR input	-	1.2:1	1.5:1	-
VSWR output	-	1.5:1	1.8:1	-
DC Voltage	20	24	32	V
Power Consumption @Psat	-	210	230	W
Power Consumption @Disable mode	-	-	5	W
RF Connectors	2.92mm (F) IN / WR28 OUT			-

Specifications at case temperature of 25°C

Tel: +34 942 29 13 42 sales@erzia.com www.erzia.com

Output Power

Figure 1 shows saturated output power measurement as a function of frequency at different temperatures.

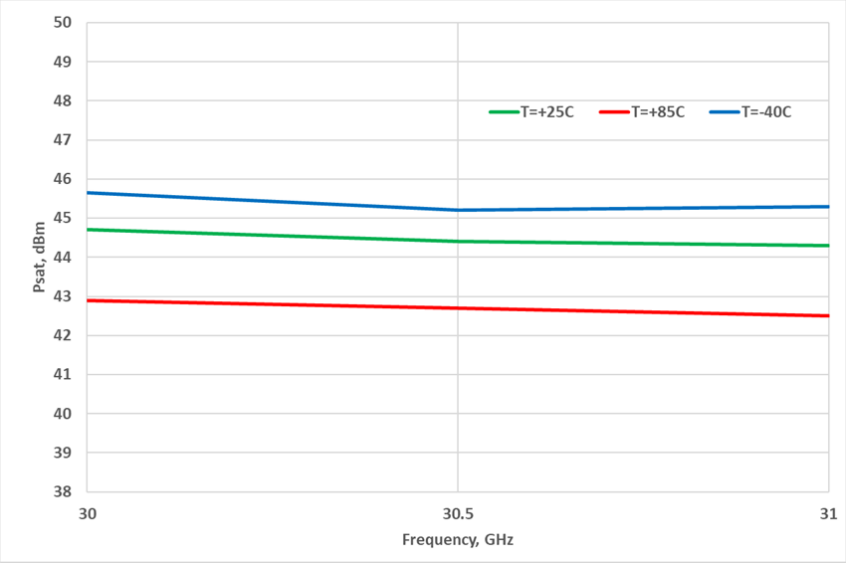

Figure 1: ERZ-HPA-3000-3100-46 Psat

Small Signal Gain

Figure 2 shows small signal gain measurement as a function of frequency at room temperature (25°C).

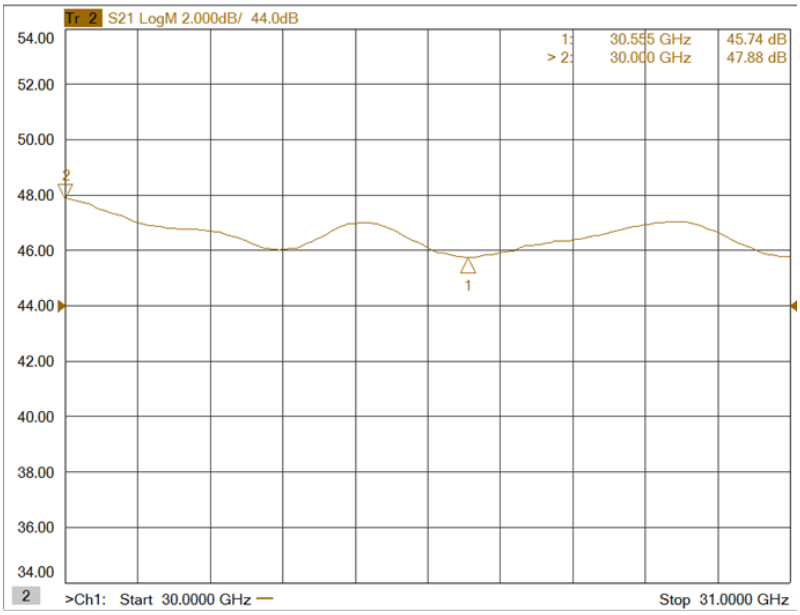

Figure 2: ERZ-HPA-3000-3100-46 Small Signal Gain

Input and Output Matching

Figure 3 and Figure 4 show input and output VSWR as a function of frequency at room temperature (25°C).

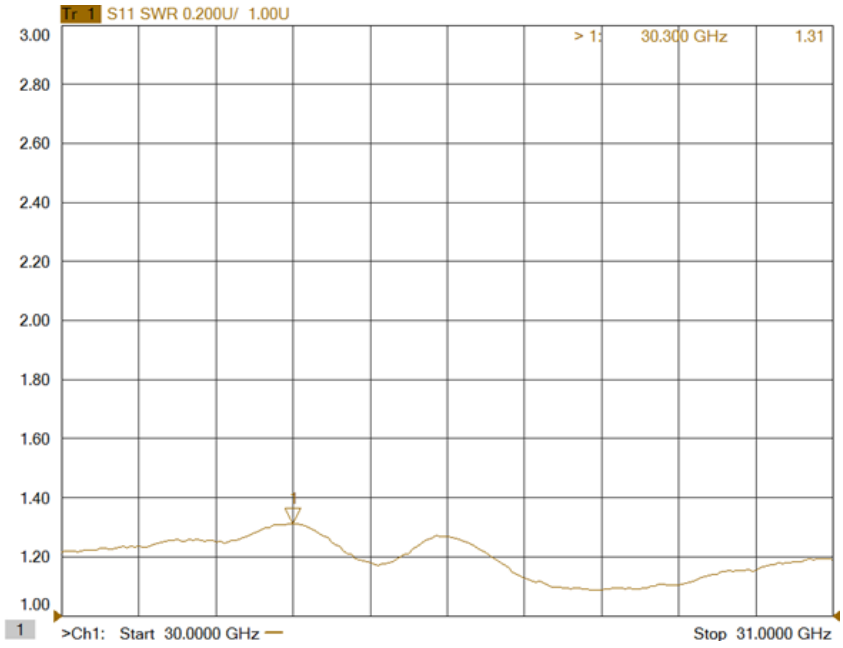

Figure 3: ERZ-HPA-3000-3100-46 Input Matching

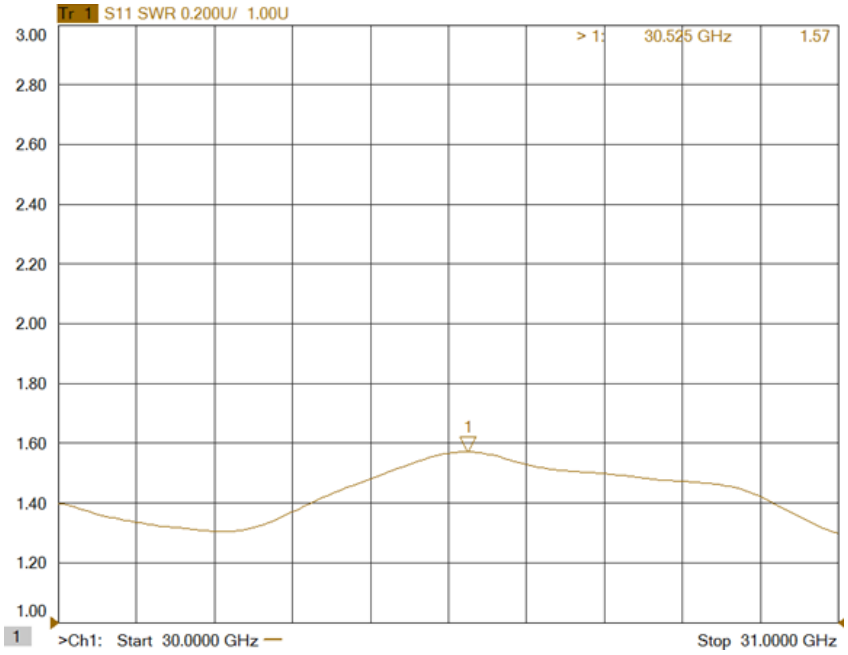

Figure 4: ERZ-HPA-3000-3100-46 Output Matching

Switch ON/OFF Time

Figure 5 and Figure 6 show switch ON/OFF time

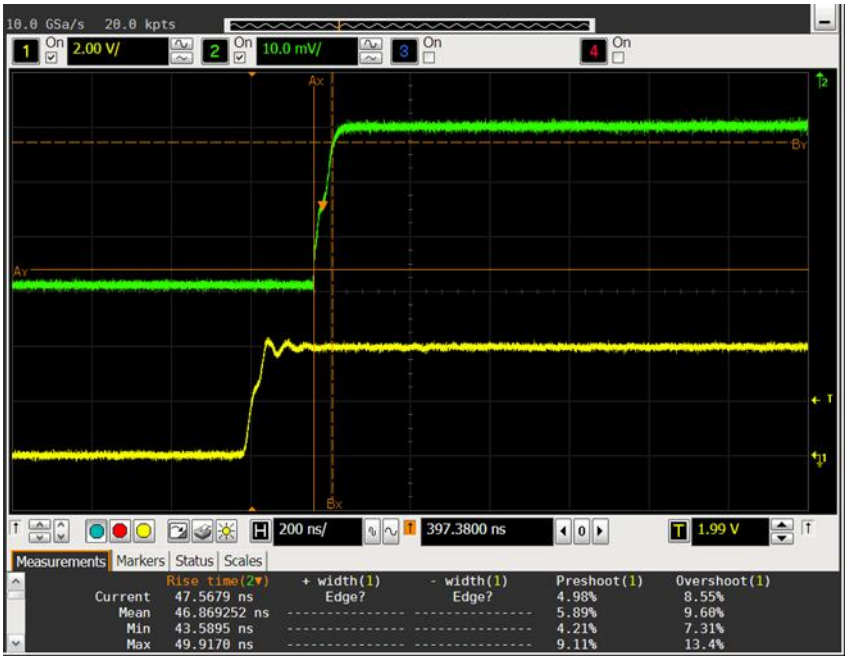

Figure 5: ERZ-HPA-3000-3100-46 Switch ON Time

Figure 6: ERZ-HPA-3000-3100-46 Switch OFF Time

Output Power Detector

Figure 7 shows output power detector voltage versus output power at different frequencies.

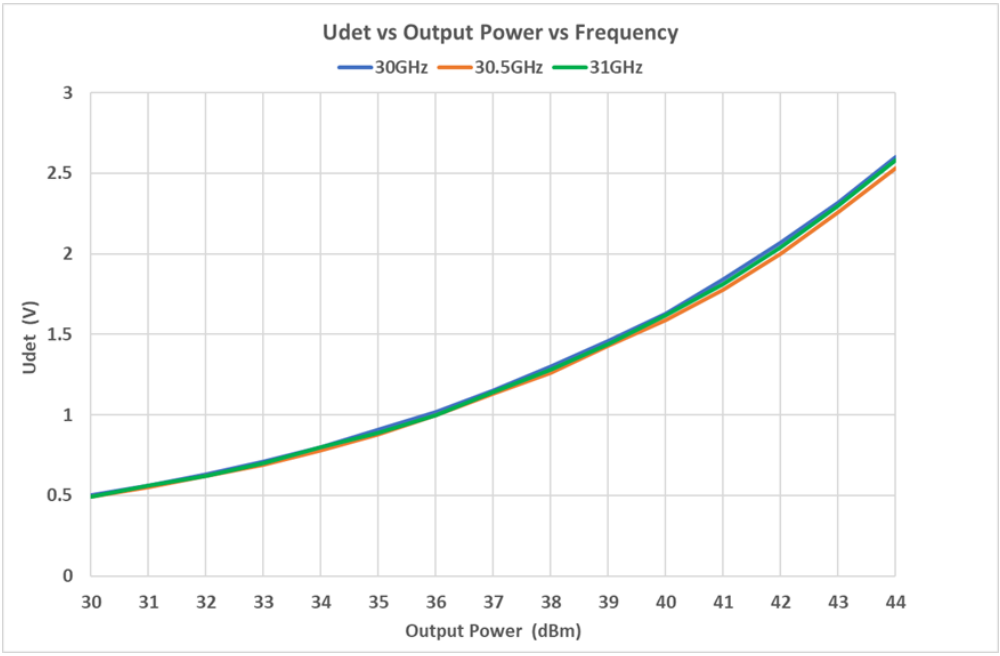

Figure 7: ERZ-HPA-3000-3100-46 Output power detector

Figure 2: ERZ-HPA-3000-3100-46 Small Signal Gain

Mechanics and Housing

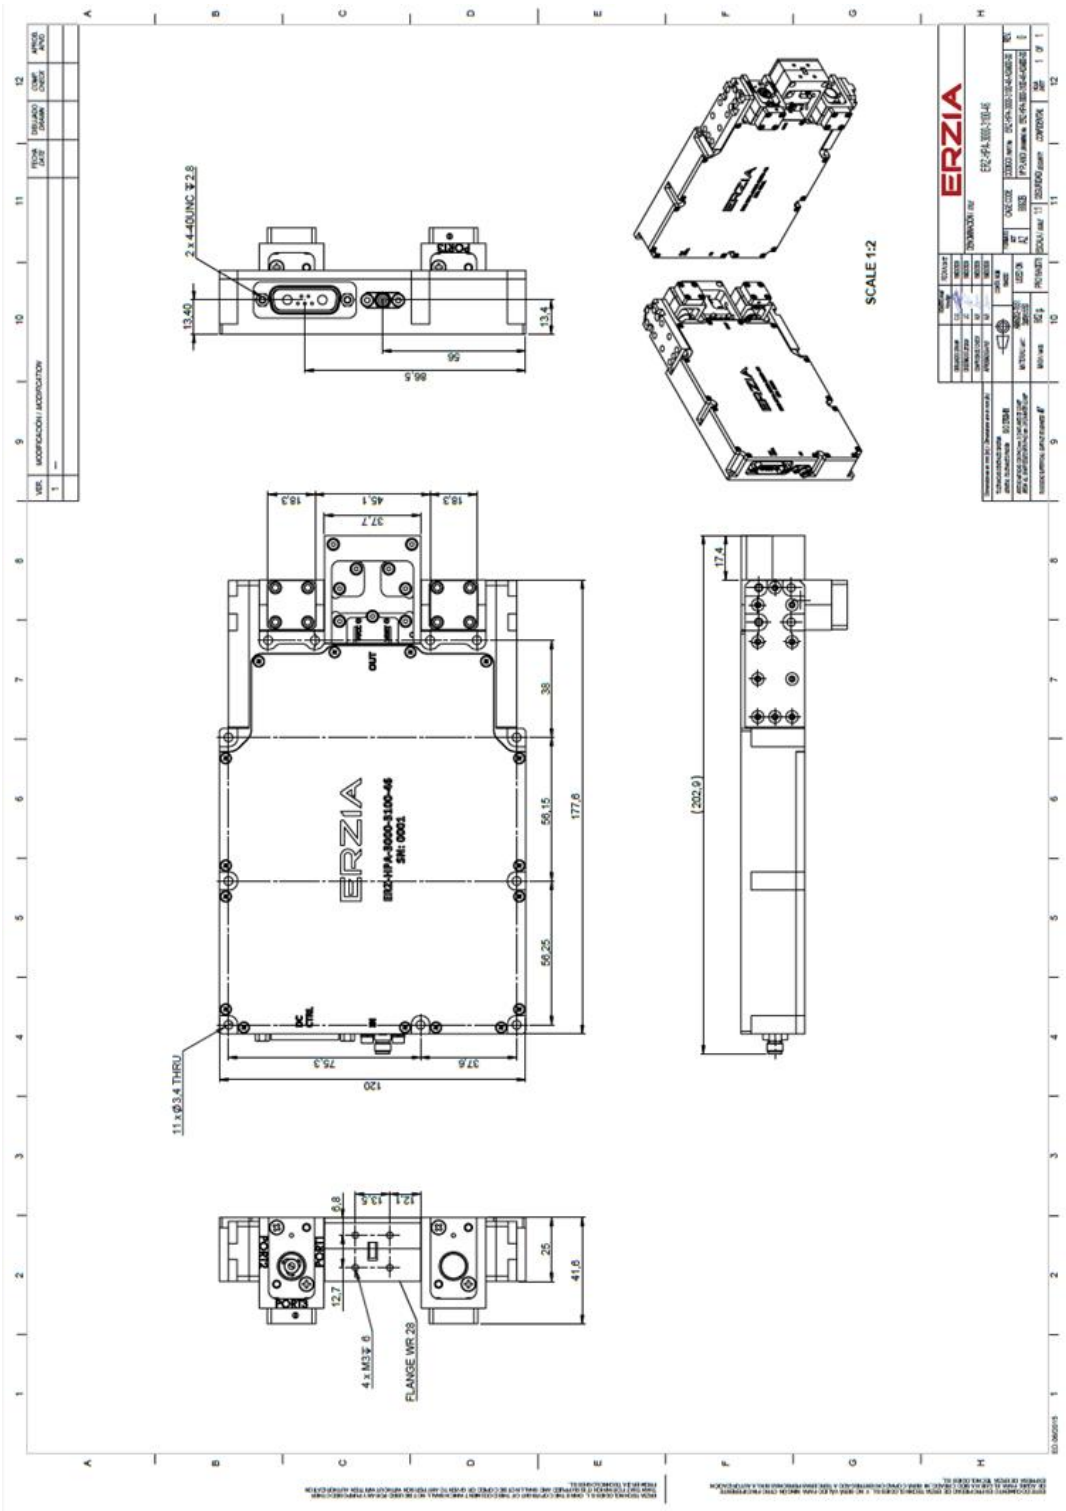

External Electrical Interface

- DC and Control: DSUB 7W2 Male type connector
- RF input and output: 2.92mm (F) and WR28 (flat flange)

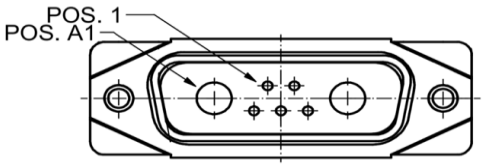

Pin No.	Label	Function	Description
A1	VDD	VDD	+(18…36) VDC
A2	PGND	Power Ground	Power Ground
1	EN	Enable	TTL Signal OFF (0V to 0.8V); ON (2V to 5.5V))
2	TEMP	Temperature Monitor	Vo = −11.69 mV C × T + 1.8663 V
3	I_SEN	Current Sensor	Vo= 0.1V/A
4	DET	Output Power Detector	See Figure 7
5	GND	Ground	Ground

Dimensions and Weight

- Dimensions: 195x120x25 (41.6) mm
- Weight: 990 grams.

Absolute Maximum Ratings

Condition	Value
DC Voltage	+32 VDC
Maximum Input Power	+10 dBm @CW +20 dBm @Pulse conditions (pulse width: 100us, duty cycle: 10%)
Enable Control Voltage	+5.5 VDC
Operation temperature (at case)	-40 to 75 °C
Storage temperature	-55 to 125 °C

- Stress above these ratings may cause permanent damage to the device.
- It is final user responsibility to maintain the amplifier within the specified ranges.

Measurements Conditions

All measurements provided in this report were performed at the following conditions:

Condition	Value
Temperature (DUT ON)	25 °C ± 1°C
Humidity	44% ± 10%
DUT Warm up time	30 min
DUT minimum operation time	24 hours
Test equipment warm up time	2 hours
Additional temperature cycles in climatic chamber (DUT OFF)	-40°C to 85°C

Environmental Specifications (By Design)

Operating Temperature:	-40 to +85 °C	(MIL-STD-810F, method 520.2)
Storage Temperature:	-55 to 125 °C	(MIL-STD-810F, method 520.2)
Vibration:	8g rms	(MIL-STD-810F, method 514.5)
Shock:	20g,11ms,saw-tooth	(MIL-STD-810F, method 516.5)
Acceleration:	15g	(MIL-STD-810F, method 513.5)

Documentation and Test Reports

All modules are at least delivered with: Electrical Test Report, Certificate of Conformance, Certificate of Acceptance and Origin. Optionally, units can be environmentally tested (temperature, vibration…).

Option (HS): Heat Sink

A heat sink (HS) can be provided to allow the operation of Power Amplifiers. Please note that most power amplifiers need heat sink or appropriate heat dissipation strategy.

Space Usage

Most of ERZIA´s products are based on rad-hard technologies and can be manufactured and integrated according to MIL / ECSS or specific hi-rel standard-screening for space, aeronautics or specific hi-reliability usage.

Customization and Extended Performances

ERZIA can fully design or adapt one of the existing RF amplifiers designs according to your specifications. Please contact us for additional information.

Model Number Codification

MODEL NUMBER

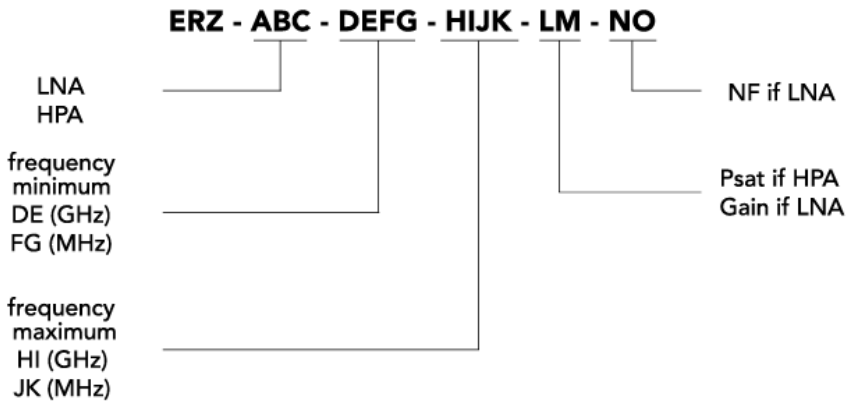

ERZIA

20261019_rev1.2

Copyright © 2026 ERZIA Technologies. All rights reserved. This information is commercial and indicative, subject to change without notice

Tel: +34 942 29 13 42 sales@erzia.com www.erzia.com