



**Main Features:**

- Frequency Range: 2 to 6 GHz.
- Typical values: Gain 12 dB, NF 2.5 dB
- RF connectors (I/O): SMA Female
- Solder filtered pins for DC connection
- Several mounting options
- Gold plated compact aluminum housing
- Hi-reliability and dedicated screening/ environmental tests available under request

**ERZ-LNA-0200-0600-12-2**

The ERZ-LNA-0200-0600-12-2 is a Low Noise Amplifier providing a gain of 12 dB with a noise figure of 2.5 dB. The compact size and modularity makes it ideal for a wide range of applications.

**Typical applications:**

- Industrial / Laboratory
- Satcom / Telecom
- Space / Aerospace

**Performance**

| Parameter           | Value             |       |       | Units |
|---------------------|-------------------|-------|-------|-------|
|                     | Min               | Typ   | Max   |       |
| Frequency           | 2                 | -     | 6     | GHz   |
| Output Power (P1dB) | 12                | 16    | 18    | dBm   |
| Small Signal Gain   | 9                 | 11    | 12    | dB    |
| Gain Flatness       | -                 | ±0.65 | -     | dB    |
| Noise Figure        | 2                 | 2.5   | 3.5   | dB    |
| VSWR input          | 1.0:1             | 1.5:1 | 2.1:1 | -     |
| VSWR output         | 1.0:1             | 1.5:1 | 2.1:1 | -     |
| DC Voltage          | 12                | 16    | 18    | V     |
| Power Consumption   | -                 | 0.5   | -     | W     |
| RF Connectors       | SMA Female IN/OUT |       |       | -     |

Specifications at a case temperature of 25°C at 12 V

Output Power at 1 dB Compression

Figure 1 shows output power at 1dB compression measurement as a function of frequency at room temperature (25°C).

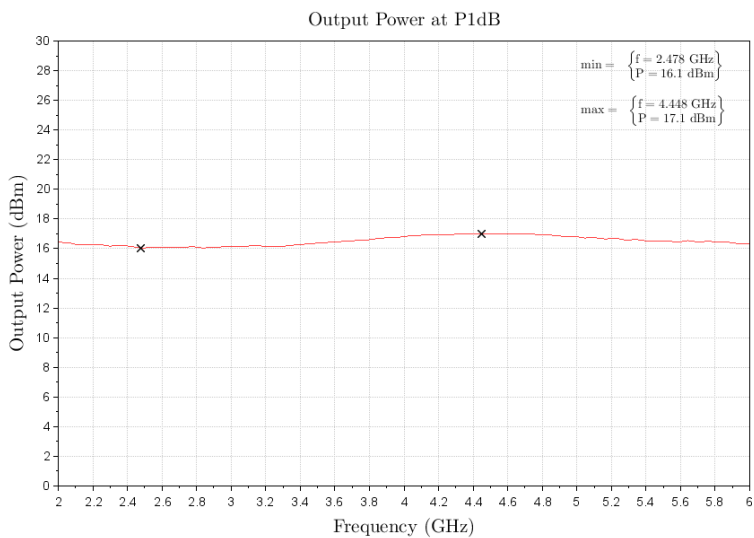


Figure 1: ERZ-LNA-0200-0600-12-2 P1dB

Small Signal Gain

Figure 2 shows the small signal gain measurement as a function of frequency at room temperature (25°C).

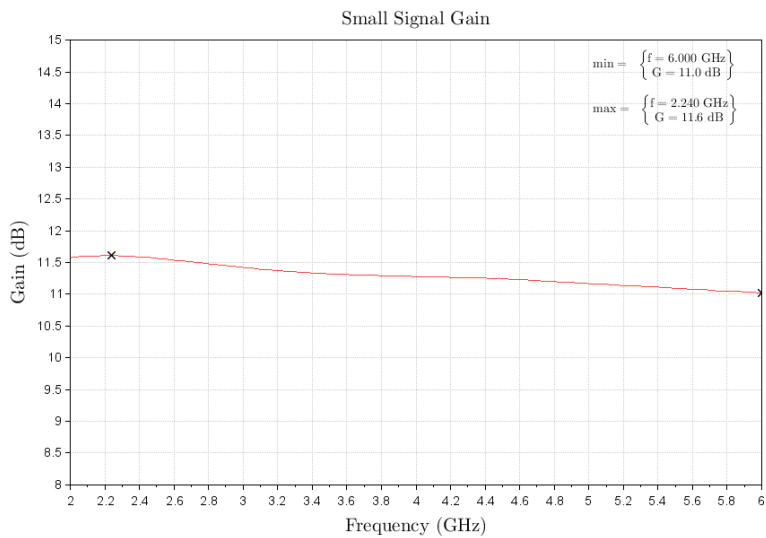


Figure 2: ERZ-LNA-0200-0600-12-2 Small Signal Gain

Small Signal Gain Vs Temperature

Figure 3 shows small signal gain measurement as a function of frequency at low (-35°C), room (25°C) and high (70°C) temperatures.

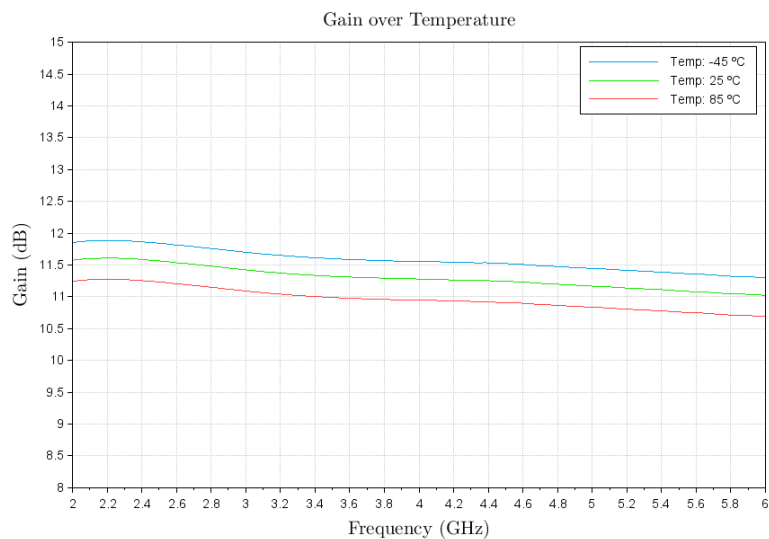


Figure 3: ERZ-LNA-0200-0600-12-2 Small Signal Gain Vs Temperature

Noise Figure

Figure 4 shows the noise figure measurement as a function of frequency at room temperature (25°C).

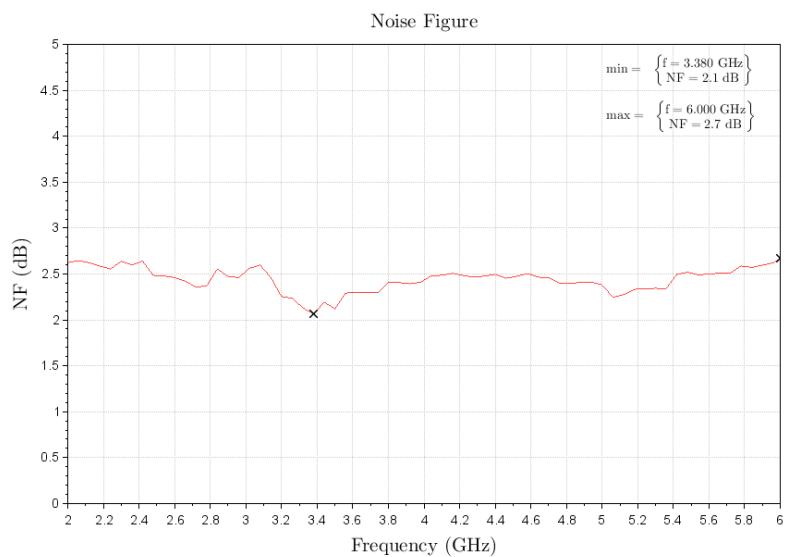


Figure 4: ERZ-LNA-0200-0600-12-2 Noise Figure

### Input and Output Matching

Figure 5 shows input (S11) and output (S22) VSWR as a function of frequency at room temperature (25°C).

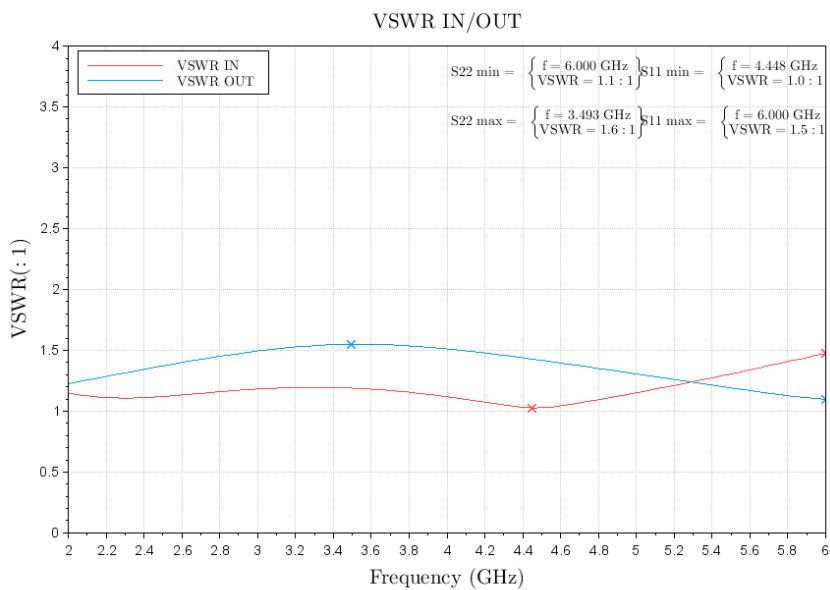


Figure 5: ERZ-LNA-0200-1800-18-4 Input & Output Matching

Absolute Maximum Ratings

| Condition                       | Value         |
|---------------------------------|---------------|
| DC Voltage                      | +18 VDC       |
| Maximum Input Power (CW)        | 20 dBm        |
| Operation temperature (at case) | -54 to 85 °C  |
| Storage temperature             | -55 to 125 °C |

- Stress above these ratings may cause permanent damage to the device.
- It is final user responsibility to maintain the amplifier within the specified ranges.

Measurements Conditions

All measurements provided in this report were performed at the following conditions:

| Condition                                                   | Value         |
|-------------------------------------------------------------|---------------|
| Temperature (DUT ON)                                        | 25 °C ± 1°C   |
| Humidity                                                    | 44% ± 10%     |
| DUT Warm up time                                            | 30 min        |
| DUT minimum operation time                                  | 24 hours      |
| Test equipment warm up time                                 | 2 hours       |
| Additional temperature cycles in climatic chamber (DUT OFF) | -40°C to 85°C |

Environmental Specifications (By Design)


|                        |                    |                              |
|------------------------|--------------------|------------------------------|
| Operating Temperature: | -54 to +85 °C      | (MIL-STD-810F, method 520.2) |
| Storage Temperature:   | -55 to 125 °C      | (MIL-STD-810F, method 520.2) |
| Vibration:             | 8g rms             | (MIL-STD-810F, method 514.5) |
| Shock:                 | 20g,11ms,saw-tooth | (MIL-STD-810F, method 516.5) |
| Acceleration:          | 15g                | (MIL-STD-810F, method 513.5) |

RoHS & REACH Compliance

This part is compliant with EU 2011/65/UE RoHS (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) and REACH (Registration, Evaluation, Authorization and restriction of Chemical substances) directives.



Mechanics and Housing

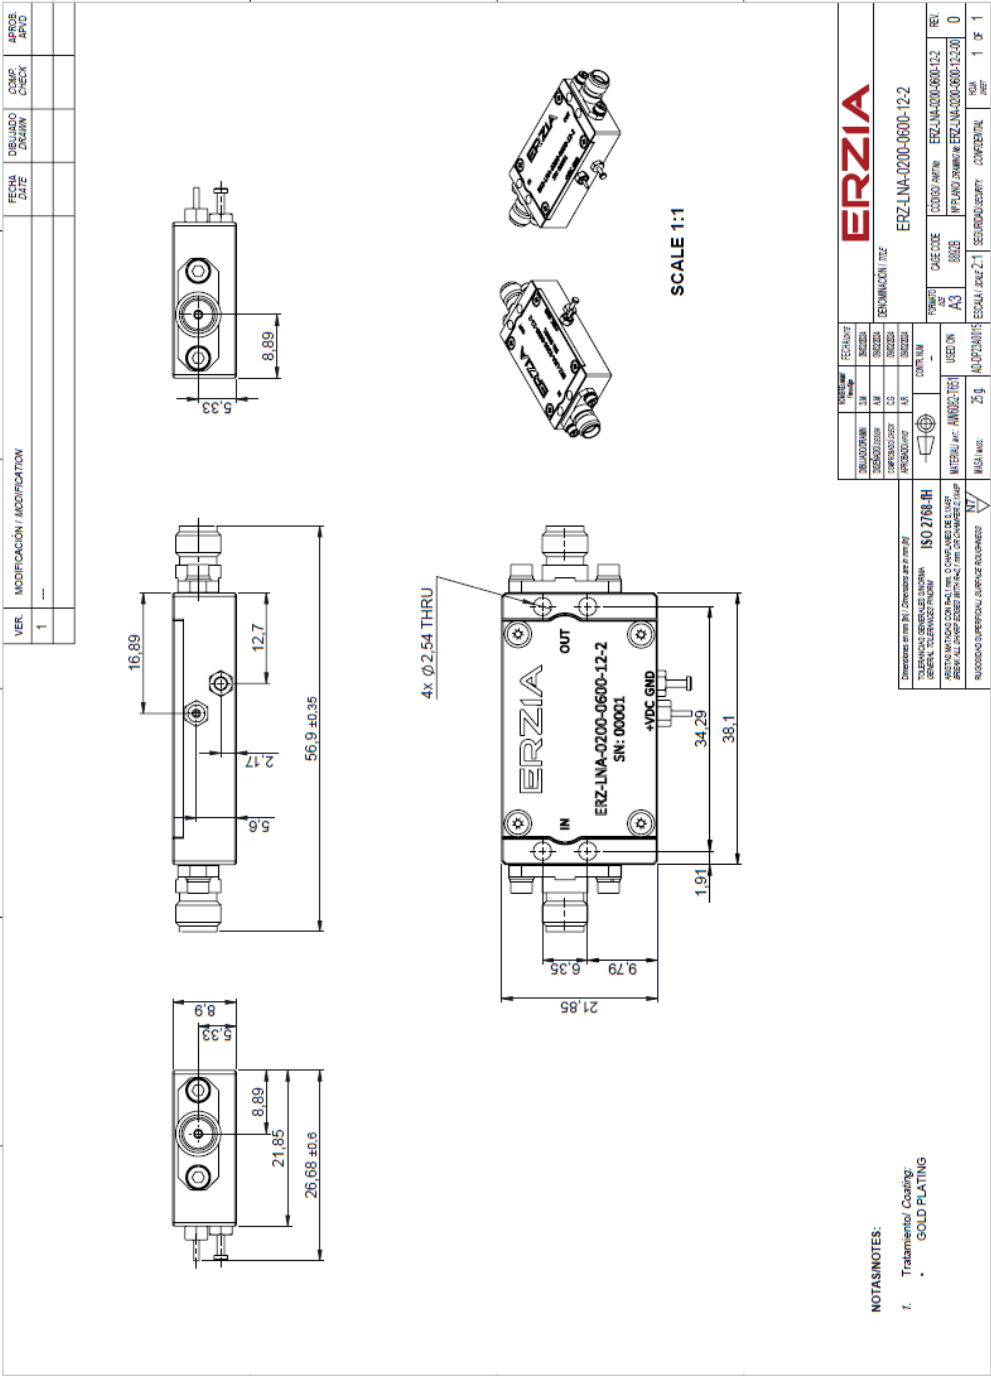

### Documentation and Test Reports

All modules are at least delivered with: Electrical Test Report, Certificate of Conformance, Certificate of Acceptance and Origin. Optionally, units can be environmentally tested (temperature, vibration...).

### Option (HS): Heat Sink

A heat sink (HS) can be provided to allow the operation of Power Amplifiers. Please note that most power amplifiers need heat sink or appropriate heat dissipation strategy.


### Space / Hi-Rel Usage

Most of ERZIA’s products are based on rad-hard technologies and can be manufactured and integrated according to MIL / ECSS or specific hi-rel standard-screening for space, aeronautics, or specific hi-reliability usage.

### Customization and Extended Performances

ERZIA can fully design or adapt one of the existing RF amplifiers designs according to your specifications. Please contact us for additional information.

### Model Number Codification

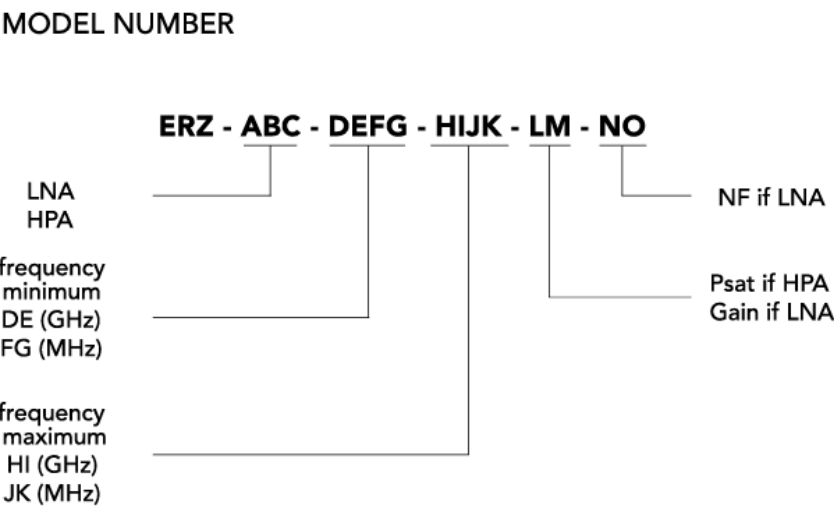

# ERZIA

20260818\_rev0.1

Copyright © 2024 ERZIA Technologies. All rights reserved. This information is commercial and indicative, subject to change without notice

Tel: +34 942 29 13 42

[sales@erzia.com](mailto:sales@erzia.com)

[www.erzia.com](http://www.erzia.com)