



### Main Features:

- Frequency Range: 6 to 12 GHz.
- Typical values: Gain 25 dB, NF 0.9 dB
- RF connectors (I/O): SMA Female
- Solder filtered pins for DC connection
- Several mounting options
- Compact aluminum housing
- Hi-reliability and dedicated screening/  
environmental tests available under request

### ERZ-LNA-0600-1200-25-1

The ERZ-LNA-0600-1200-25-1 is a Low Noise Amplifier providing a gain of 25 dB with a noise figure below 1 dB. The compact size and modularity makes it ideal for a wide range of applications.

### Typical applications:

- Industrial / Laboratory
- Satcom / Telecom
- Space / Aerospace

### Performance

Parameter	Value			Units
	Min	Typ	Max	
Frequency	6	-	12	GHz
Output Power (P1dB)	12	14	17	dBm
Small Signal Gain	23	25	27	dB
Gain Flatness	-	±1	-	dB
Noise Figure	0.6	0.9	1.2	dB
VSWR input	1.1:1	1.4:1	1.8:1	-
VSWR output	1.3:1	1.4:1	2.0:1	-
DC Voltage	9	12	15	V
Power Consumption	-	0.3	-	W
RF Connectors	SMA Female IN/OUT			-

Specifications at a case temperature of 25°C at 12 V

### Output Power at 1 dB Compression

Figure 1 shows output power at 1dB compression measurement as a function of frequency at room temperature (25°C).

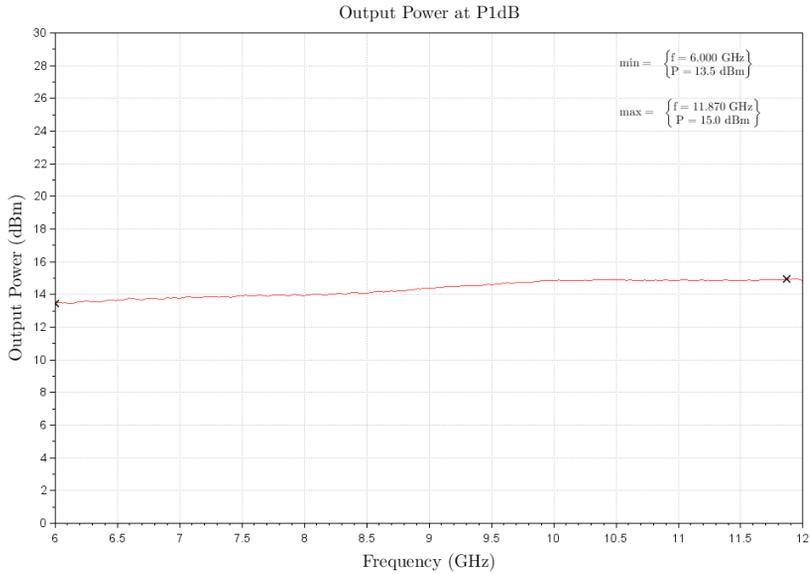


Figure 1: ERZ-LNA-0600-1200-25-1 P1dB

### Small Signal Gain

Figure 2 shows the small signal gain measurement as a function of frequency at different temperatures.

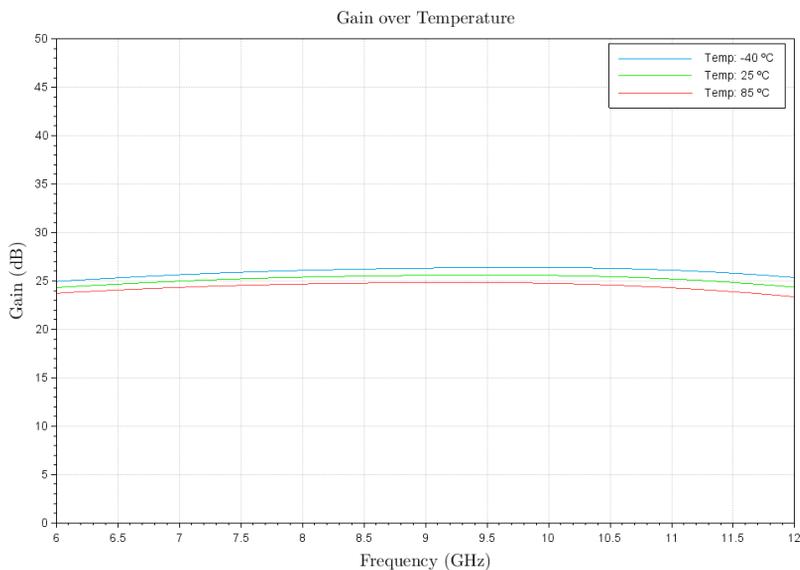


Figure 2: ERZ-LNA-0600-1200-25-1 Small Signal Gain

### Noise Figure

Figure 3 shows the noise figure measurement as a function of frequency at room temperature (25°C).

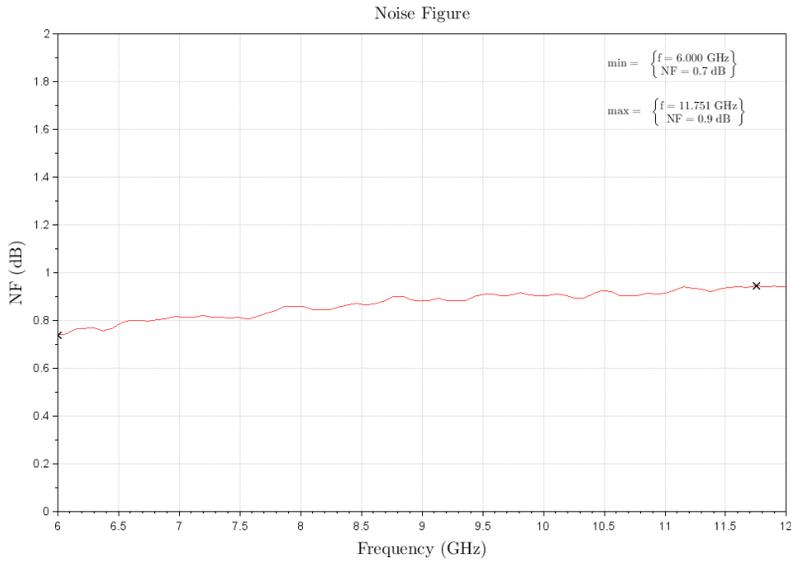


Figure 3: ERZ-LNA-0600-1200-25-1 Noise Figure

### Input and Output Matching

Figure 4 shows input and output matching as a function of frequency at room temperature (25°C).

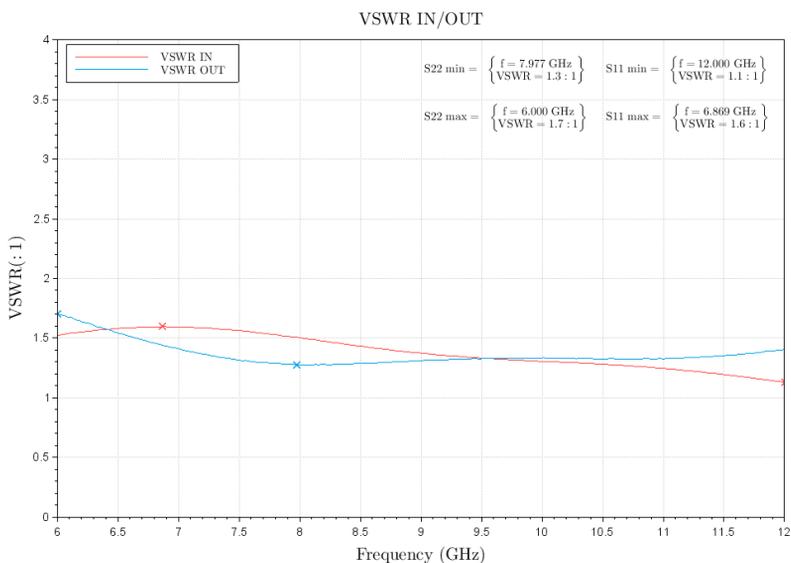


Figure 4: ERZ-LNA-0600-1200-25-1 Input&Output matching

### Absolute Maximum Ratings

Condition	Value
DC Voltage	+15 VDC
Maximum Input Power (CW)	+18 dBm
Operation temperature (at case)	-40 to 85 °C
Storage temperature	-55 to 125 °C

- Stress above these ratings may cause permanent damage to the device.
- It is final user responsibility to maintain the amplifier within the specified ranges.

### Measurements Conditions

All measurements provided in this report were performed at the following conditions:

Condition	Value
Temperature (DUT ON)	25 °C ± 1°C
Humidity	44% ± 10%
DUT Warm up time	30 min
DUT minimum operation time	24 hours
Test equipment warm up time	2 hours
Additional temperature cycles in climatic chamber (DUT OFF)	-40°C to 85°C

### Environmental Specifications (By Design)

Operating Temperature:	-40 to +85 °C	(MIL-STD-810F, method 520.2)
Storage Temperature:	-55 to 125 °C	(MIL-STD-810F, method 520.2)
Vibration:	8g rms	(MIL-STD-810F, method 514.5)
Shock:	20g, 11ms, saw-tooth	(MIL-STD-810F, method 516.5)
Acceleration:	15g	(MIL-STD-810F, method 513.5)

### RoHS & REACH Compliance

This part is compliant with EU 2011/65/UE RoHS (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) and REACH (Registration, Evaluation, Authorization and restriction of Chemical substances) directives.



### Mechanics and Housing

VER.	MODIFICACIÓN / MODIFICATION	FECHA / DATE	DIBUJADO / DRAWN	COMP. CHECK	ERRORS APVD
1					

**NOTES:**

- △: Mounting base.
- Device can only be mounted on the indicated surface △
- Warning: connectors overhang upper surface

MARCA / BRAND	TECNOLOGÍA / TECHNOLOGY	DENOMINACIÓN / REF.	FORMA / SHAPE	USO / USE	MATERIAL / MATERIAL	PESO / WEIGHT
ERZIA	RF	ERZ-LNA-0600-1200-32-3	Rectangular	NA	Aluminum	45g

REVISIONES / REVISIONS	FECHA / DATE	AUTOR / AUTHOR	APROBADO / APPROVED
1			

ERZIA TECHNOLOGIES S.L. OWNS THE COPYRIGHT OF THIS DOCUMENT WHICH SHALL NOT BE USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS ISSUED AND SHALL NOT BE COPIED OR GIVEN TO ANY PERSON WITHOUT WRITTEN AUTHORIZATION FROM ERZIA TECHNOLOGIES S.L. NO SE PUEDE REPRODUCIR NINGUNA PARTE DE ESTE DOCUMENTO SIN LA AUTORIZACIÓN DE ERZIA TECHNOLOGIES S.L. ERZIA TECHNOLOGIES S.L. ES EL DUEÑO DE LOS DERECHOS DE AUTOR DE ESTE DOCUMENTO EL CUAL NO DEBE USARSE PARA NINGÚN OTRO FIN QUE EL PARA EL CUAL FUE ELABORADO Y NO DEBE COPIARSE O ENTREGARSE A NINGUNA PERSONA SIN LA AUTORIZACIÓN DE ERZIA TECHNOLOGIES S.L.

### Documentation and Test Reports

All modules are at least delivered with: Electrical Test Report, Certificate of Conformance, Certificate of Acceptance and Origin. Optionally, units can be environmentally tested (temperature, vibration...).

### Option (HS): Heat Sink

A heat sink (HS) can be provided to allow the operation of Power Amplifiers. Please note that most power amplifiers need heat sink or appropriate heat dissipation strategy.

### Space / Hi-rel Usage


Most of ERZIA's products are based on rad-hard technologies and can be manufactured and integrated according to specific hi-rel standard-screening for space, aeronautics or specific hi-reliability usage.

### Customization and Extended Performances

ERZIA can fully design or adapt one of the existing RF amplifiers designs according to your specifications. Please contact us for additional information.

### Model Number Codification

#### MODEL NUMBER

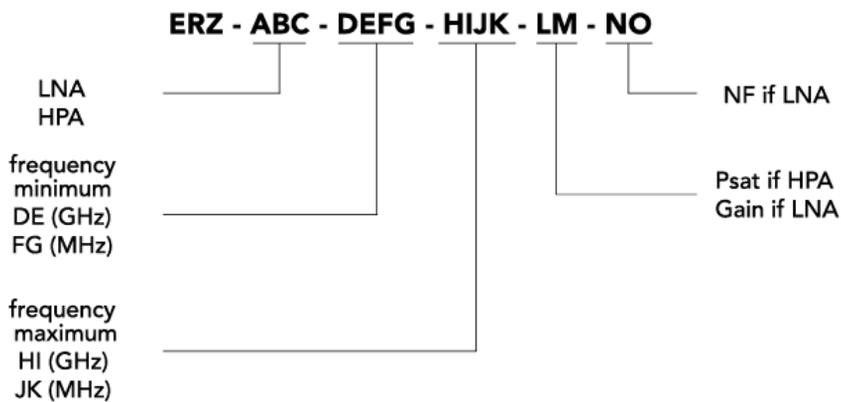

# ERZIA

2020306\_rev1.0

Copyright © 2025 ERZIA Technologies. All rights reserved. This information is commercial and indicative, subject to change without notice

Tel: +34 942 29 13 42

[sales@erzia.com](mailto:sales@erzia.com)

[www.erzia.com](http://www.erzia.com)