ERZIA

DATASHEET

Low Noise Amplifier

ERZ-LNA-06900-0800-30-2.5

Main Features:

- Frequency Range: 6.9 to 8 GHz
- Typical values: Gain 30 dB, NF 2 dB
- RF connectors (I/O): SMAFemale
- Solder filtered pins for DC connection
- Several mounting options
- Gold platted compact aluminum housing
- Hi-reliability and dedicated screening/ environmental tests available under request

ERZ-LNA-0690-0800-30-2.5

The ERZ-LNA-0690-0800-30-2.5 is a low noise amplifier providing a gain of 30 dB with a noise figure of 2 dB. The compact size and modularity makes it ideal for a wide range of applications.

Typical applications:

- Industrial / Laboratory
- Satcom / Telecom
- Space / Aerospace

Performance

Parameter	Value			Units
	Min	Typ	Max	
Frequency	6.9	-	8	GHz
Output Power (P1dB)	20	20.5	21	dBm
OIP3	34	35	36	dBm
Small Signal Gain	30	31	33	dB
Gain flatness over frequency	-	±0.2	±0.5	dB
Gain flatness over temperature (-30 to +70°C)	-	±0.8	±1	dB
Noise Figure	-	1.7	2.5	dB
VSWR input	-	1.4:1	1.5:1	-
VSWR output	-	1.1:1	1.5:1	-
DC Voltage	14	15	18	V
Power Consumption		1.5		W
RF Connectors	SMA Female IN/OUT			-

Specifications at a case temperature of 25°C at 15 V

Output Power at 1 dB Compression (P1dB)

Figure 1 shows output power at 1dB compression measurement as a function of frequency at different temperatures (-30, +25 and +70 °C).

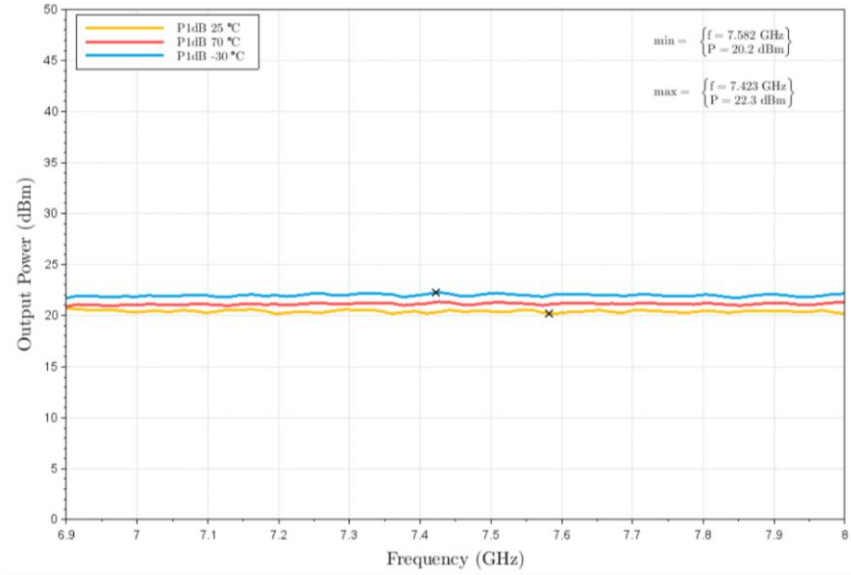

Figure 1: ERZ-LNA-0690-0800-30-2.5 P1dB

Third order intercept point (OIP3)

Figure 2 shows OIP3 measurement as a function of frequency at different temperatures (-30, +25 and +70 °C).

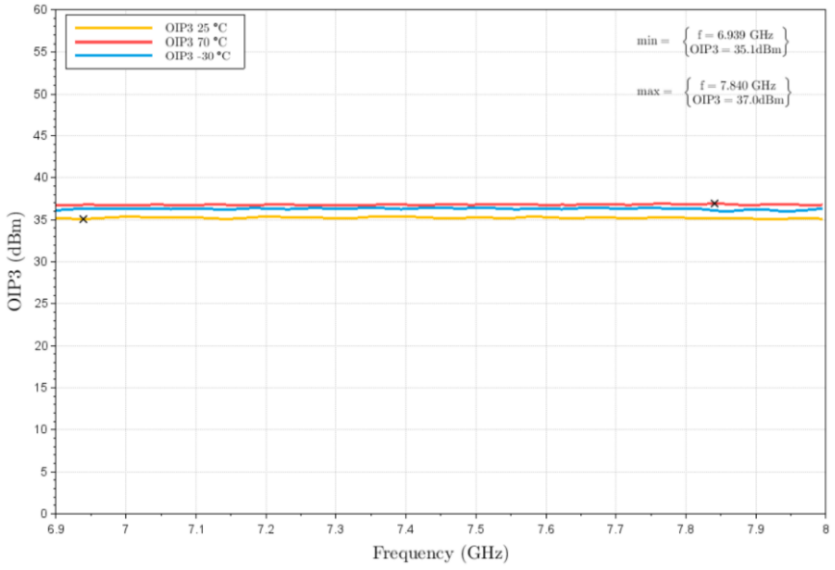

Figure 2: ERZ-LNA-0690-0800-30-2.5 OIP3

Small Signal Gain

Figure 3 shows small signal gain measurement as a function of frequency at low (-35°C), room (25°C) and high (70°C) temperatures.

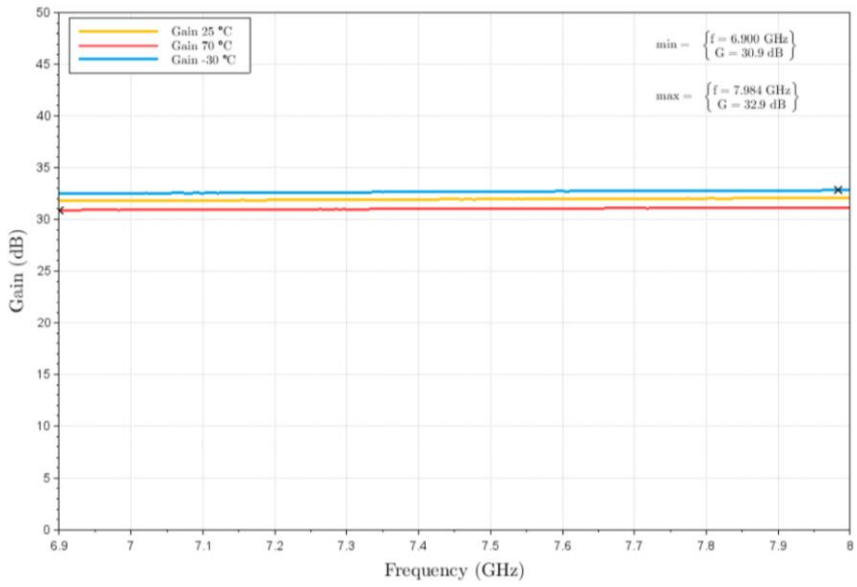

Figure 3: ERZ-LNA-0690-0800-30-2.5 Small Signal Gain

Noise Figure

Figure 4 shows the noise figure measurement as a function of frequency at different temperatures (-30, +25 and +70°C).

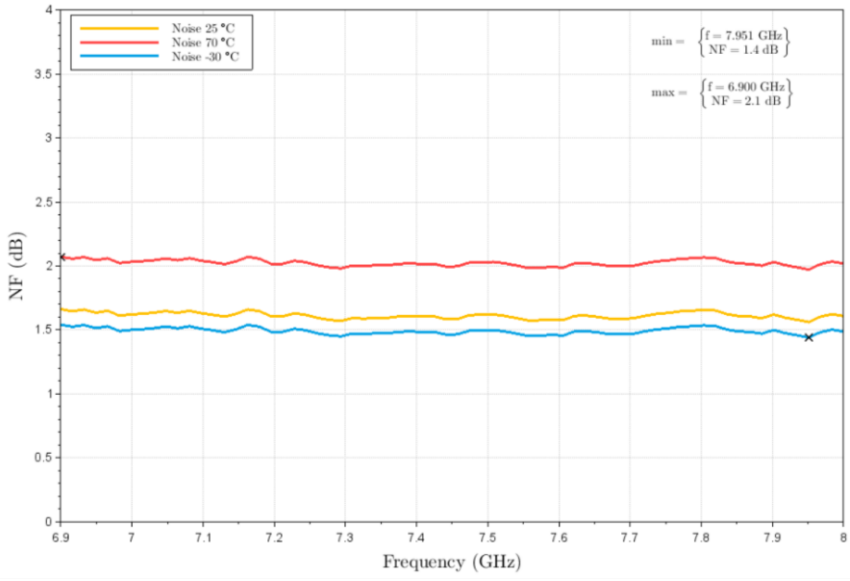

Figure 4: ERZ-LNA-0690-0800-30-2.5 Noise Figure

Input and Output Matching

Figure 5 and Figure 6 show input (S11) and output (S22) VSWR as a function of frequency at different temperatures (-30, +25 and +70ºC).

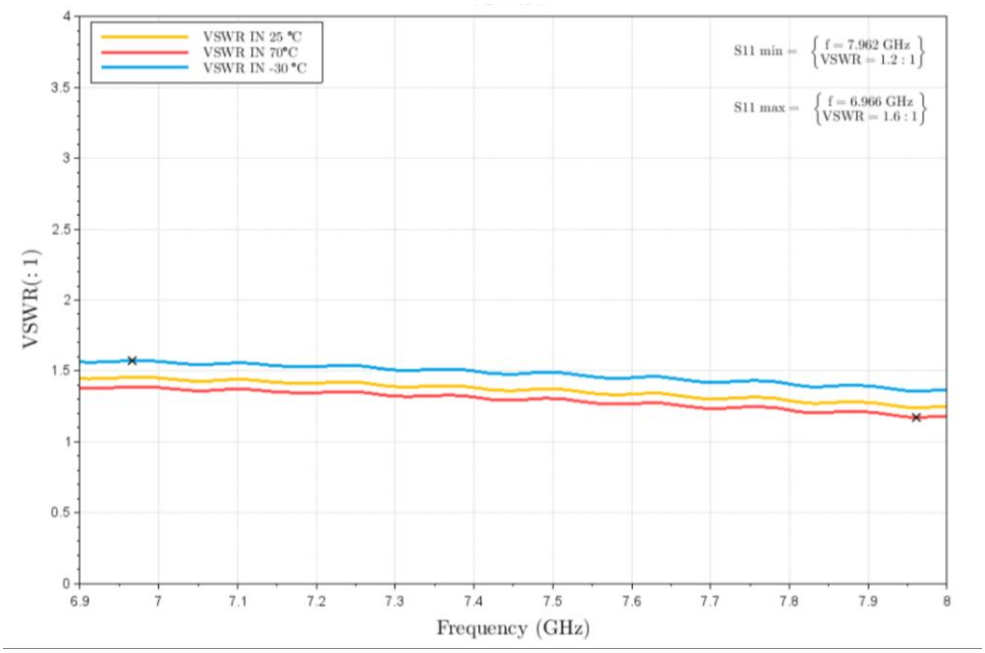

Figure 5: ERZ-LNA-0690-0800-30-2.5 Input Matching

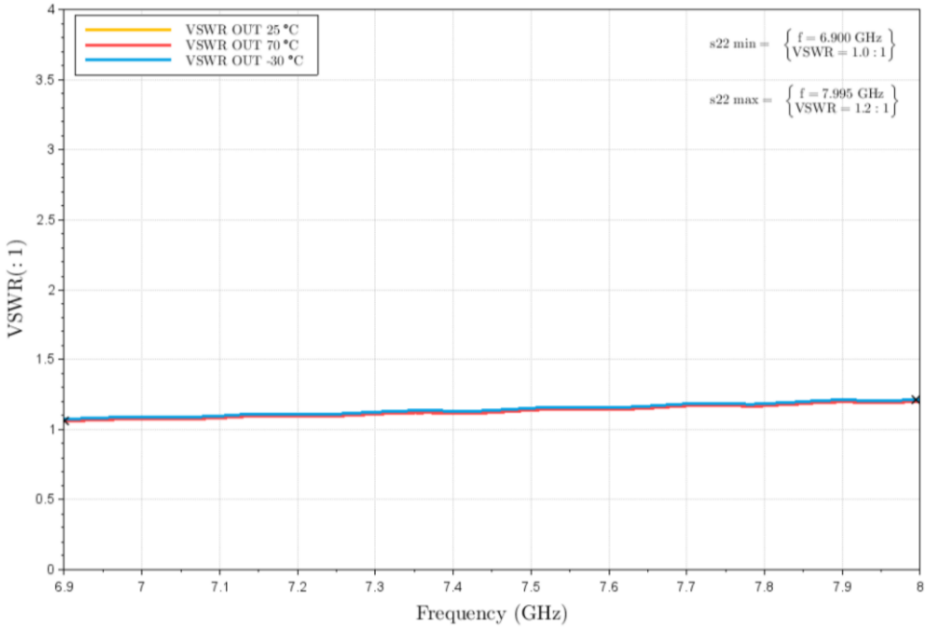

Figure 6: ERZ-LNA-0690-0800-30-2.5 Output Matching

Absolute Maximum Ratings

Condition	Value
DC Voltage	+18 VDC
Maximum Input Power (CW)	+24 dBm
Operation temperature (at case)	-40 to 85 °C
Storage temperature	-55 to 125 °C

- Stress above these ratings may cause permanent damage to the device.
- It is final user responsibility to maintain the amplifier within the specified ranges.

Measurements Conditions

All measurements provided in this report were performed at the following conditions:

Condition	Value
Temperature (DUT ON)	-30, +25, +70 °C ± 1°C
Humidity	44% ± 10%
DUT Warm up time	30 min
DUT minimum operation time	24 hours
Test equipment warm up time	2 hours
Additional temperature cycles in climatic chamber (DUT OFF)	-40°C to 85°C

Environmental Specifications (By Design)

Operating Temperature:	-45 to +85 °C	(MIL-STD-810F, method 520.2)
Storage Temperature:	-55 to 125 °C	(MIL-STD-810F, method 520.2)
Vibration:	8g rms	(MIL-STD-810F, method 514.5)
Shock:	20g,11ms,saw-tooth	(MIL-STD-810F, method 516.5)
Acceleration:	15g	(MIL-STD-810F, method 513.5)

RoHS & REACH Compliance

This part is compliant with EU 2011/65/UE RoHS (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) and REACH (Registration, Evaluation, Authorization and restriction of Chemical substances) directives.

Low Noise Amplifier

ERZ-LNA-06900-0800-30-2.5

Mechanics and Housing

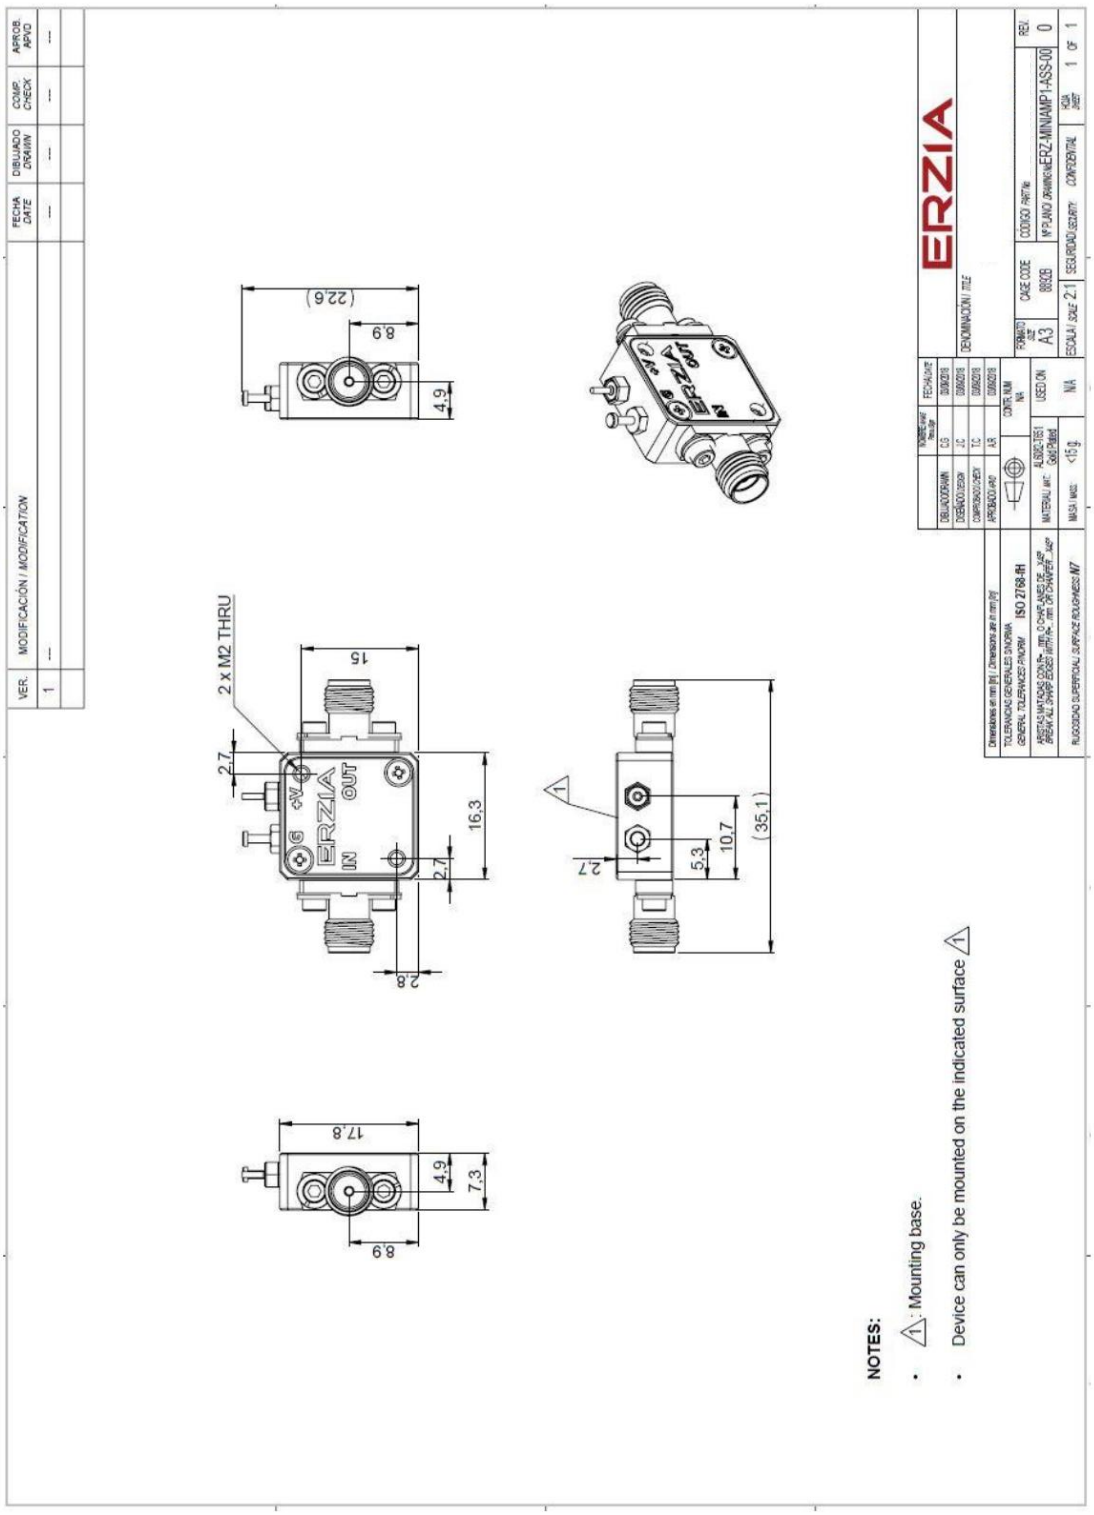

Documentation and Test Reports

All modules are at least delivered with: Electrical Test Report, Certificate of Conformance, Certificate of Acceptance and Origin. Optionally, units can be environmentally tested (temperature, vibration…).

Option (HS): Heat Sink

A heat sink (HS) can be provided to allow the operation of Power Amplifiers. Please note that most power amplifiers need heat sink or appropriate heat dissipation strategy.

Space / Hi-Rel Usage

Most of ERZIA´s products are based on rad-hard technologies and can be manufactured and integrated according to MIL / ECSS or specific hi-rel standard-screening for space, aeronautics, or specific hi-reliability usage.

Customization and Extended Performances

ERZIA can fully design or adapt one of the existing RF amplifiers designs according to your specifications. Please contact us for additional information.

Model Number Codification

MODEL NUMBER

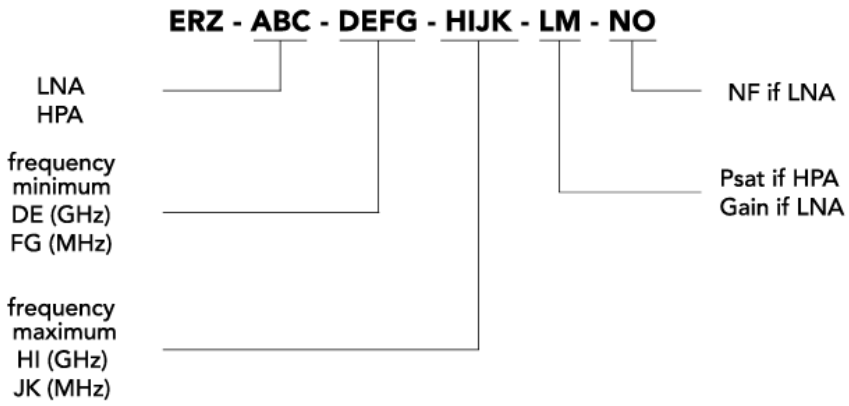

20261019_rev1.1

Copyright © 2021 ERZIA Technologies. All rights reserved. This information is commercial and indicative, subject to change without notice

Tel: +34 942 29 13 42 sales@erzia.com www.erzia.com