



### Main Features:

- Frequency Range: 2 to 20 GHz.
- Typical values: Psat 42 dBm, Gain 51 dB
- RF connectors (I/O): SMA Female
- DB9 connector for DC and control
- GaN technology
- Several mounting options
- Compact aluminum housing
- Hi-reliability and dedicated screening/ environmental tests available under request

### ERZ-HPA-0200-2000-44

The ERZ-HPA-0200-2000-44 is a GaN High Power Amplifier providing an output power of 42 dBm and a gain of 51 dB. The compact size and modularity makes it ideal for a wide range of applications.

### Typical applications:

- Industrial / Laboratory
- Satcom / Telecom
- Space / Aerospace

### Performance

Parameter	Value			Units
	Min	Typ	Max	
Frequency	2	-	20	GHz
Output Power (Psat)	39	42	45	dBm
Small Signal Gain	43	51	59	dB
Gain Flatness	-	±1.5	±5.5	dB
Noise Figure	-	-	-	dB
VSWR input	-	1.8:1	2.5:1	-
VSWR output	-	1.8:1	2.5:1	-
DC Voltage	24	28	32	V
Power Consumption	-	130	-	W
RF Connectors	SMA Female IN/OUT			-

Specifications at a case temperature of 25°C at 28 V

### Saturated Output Power

Figure 1 shows output power at saturation level measurement as a function of frequency at room temperature (25°C).

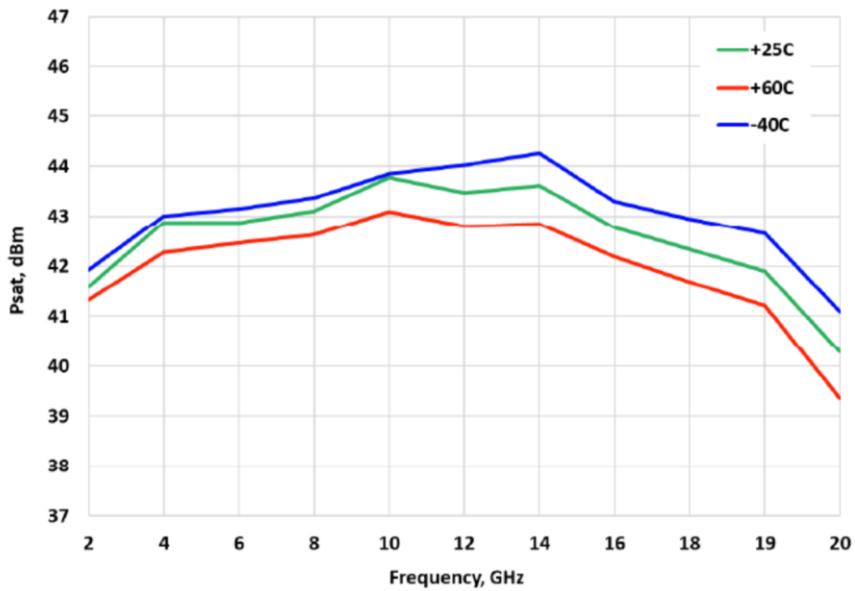


Figure 1: ERZ-HPA-0200-2000-44 Psat

### Small Signal Gain

Figure 2 shows output small signal gain measurement as a function of frequency at different temperatures.

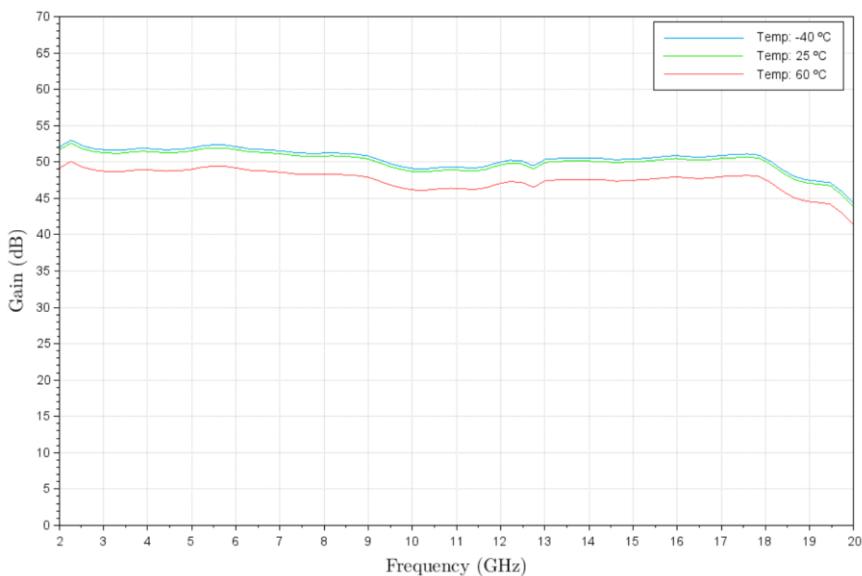


Figure 2: ERZ-HPA-0200-2000-44 Gain

## Input and Output matching

Figure 3 shows input (S11) and output (S22) VSWR as a function of frequency at room temperature (25°C).


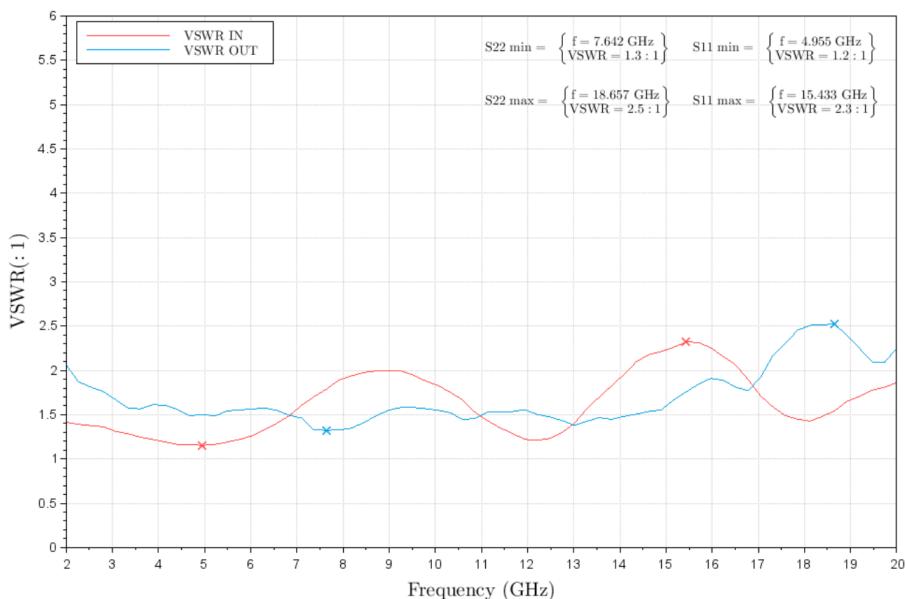


Figure 3: ERZ-HPA-0200-2000-44 Input & Output matching

## Mechanics and Housing

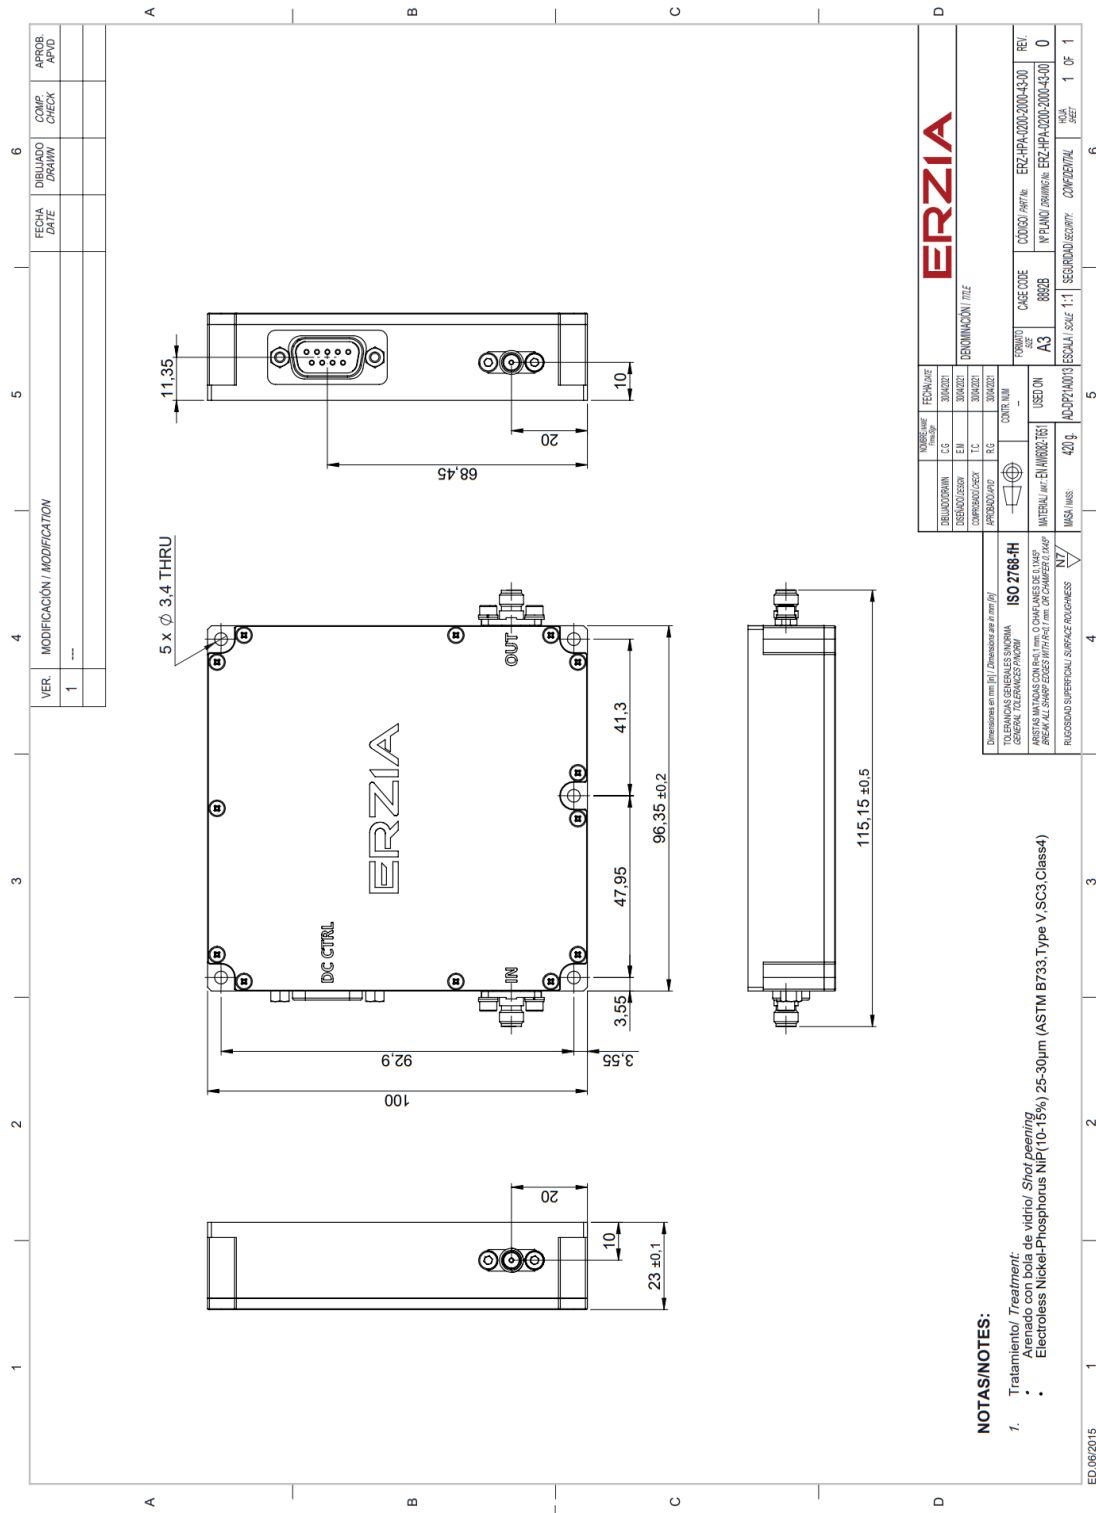

## NOTAS/NOTES:

1. Tratamiento. *Treatment.*
  - Arenado con bola de vidrio. *Shot peening.*
  - Electrólisis. Nickel-Phosphorus NP10-15% 25-30um (ASTM B733, Type V SC3, Class 4)

## DC & Control Interface

### Power supply characteristics

- Input Voltage:  $28 \pm 4$  VDC

### Control characteristics

- TTL command (ON/OFF function).
- Temperature & Current monitoring.

Table below shows D-sub 9 connector (Male) pinout:

PIN	LABEL	SIGNAL	DESCRIPTION
1	VCC	+28V Power Source	Power Supply
2	VCC	+28V Power Source	Power Supply
3	GND	Ground	Ground
4	EN	LVTTL Enable	OFF (0V to 0.8V); ON (2V to 5.5V);
5	TEMP	Temperature Monitor	$Vo = -11.69 \text{ mV/}^{\circ}\text{C} \times T + 1.8663 \text{ V}$
6	PGND	Power Ground	Power Ground
7	PGND	Power Ground	Power Ground
8	GND	Ground	Ground
9	I_SEN	Current SENSE	$Vo = 0.1\text{V/A}$




Figure 8: D-sub 9 Connector (Front view)

## Absolute Maximum Ratings

Condition	Value
DC Voltage	+32 VDC
Maximum Input Power (CW)	15 dBm
Operation temperature (at case)	-40 to 70 °C
Storage temperature	-55 to 125 °C

- Stress above these ratings may cause permanent damage to the device.
- It is final user responsibility to maintain the amplifier within the specified ranges.

## Measurements Conditions

All measurements provided in this report were performed at the following conditions:

Condition	Value
Temperature (DUT ON)	25 °C ± 1°C
Humidity	44% ± 10%
DUT Warm up time	30 min
DUT minimum operation time	24 hours
Test equipment warm up time	2 hours
Additional temperature cycles in climatic chamber (DUT OFF)	-40°C to 85°C

## Environmental Specifications (By Design)

Operating Temperature:	-45 to +85 °C	(MIL-STD-810F, method 520.2)
Storage Temperature:	-55 to 125 °C	(MIL-STD-810F, method 520.2)
Vibration:	8g rms	(MIL-STD-810F, method 514.5)
Shock:	20g, 11ms, saw-tooth	(MIL-STD-810F, method 516.5)
Acceleration:	15g	(MIL-STD-810F, method 513.5)

## RoHS & REACH Compliance

This part is compliant with EU 2011/65/UE RoHS (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) and REACH (Registration, Evaluation, Authorization and restriction of Chemical substances) directives.



### Documentation and Test Reports

All modules are at least delivered with: Electrical Test Report, Certificate of Conformance, Certificate of Acceptance and Origin. Optionally, units can be environmentally tested (temperature, vibration...).

### Option (HS): Heat Sink

A heat sink (HS) can be provided to allow the operation of Power Amplifiers. Please note that most power amplifiers need heat sink or appropriate heat dissipation strategy.

### Space


Most of ERZIA's products are based on rad-hard technologies and can be manufactured and integrated according to MIL / ECSS or specific hi-rel standard-screening for space, aeronautics or specific hi-reliability usage.

### Customization and Extended Performances

ERZIA can fully design or adapt one of the existing RF amplifiers designs according to your specifications. Please contact us for additional information.

### Model Number Codification

#### MODEL NUMBER

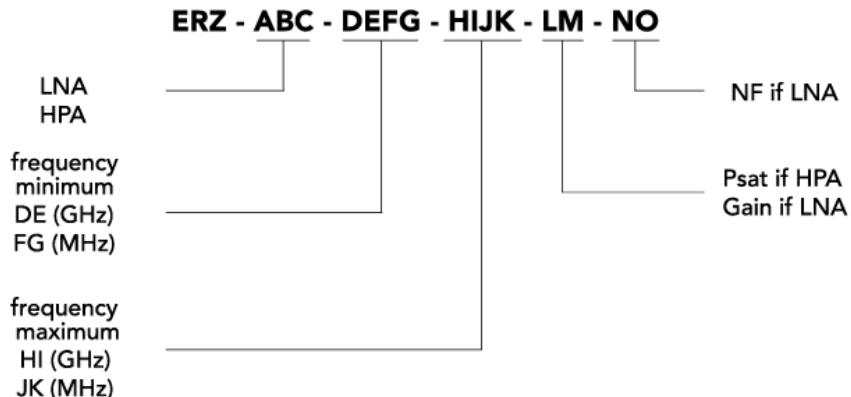

# ERZIA

20240717\_rev1.12

Copyright © 2022 ERZIA Technologies. All rights reserved. This information is commercial and indicative, subject to change without notice

Tel: +34 942 29 13 42

[sales@erzia.com](mailto:sales@erzia.com)

[www.erzia.com](http://www.erzia.com)