



### Main Features:

- Frequency Range: 2 to 18 GHz.
- Typical values: Gain 30 dB, NF 2 dB
- RF connectors (I/O): SMA Female
- Solder filtered pins for DC connection
- Several mounting options
- Gold plated compact aluminum housing
- Hi-reliability and dedicated screening/  
environmental tests available under request

### ERZ-LNA-0200-1800-30-2

The ERZ-LNA-0200-1800-30-2 is a Low Noise Amplifier providing a gain of 30 dB with a noise figure of 2 dB. The compact size and modularity makes it ideal for a wide range of applications.

### Typical applications:

- Industrial / Laboratory
- Satcom / Telecom
- Space / Aerospace

### Typical performances

| Parameter           | Value             |       |       | Units |
|---------------------|-------------------|-------|-------|-------|
|                     | Min               | Typ   | Max   |       |
| Frequency           | 2                 | -     | 18    | GHz   |
| Output Power (P1dB) | 15                | 17    | 21    | dBm   |
| Small Signal Gain   | 28                | 32    | 37    | dB    |
| Gain Flatness       | -                 | ±3.5  | -     | dB    |
| Noise Figure        | 1.5               | 2     | 3     | dB    |
| VSWR input          | 1.1:1             | 1.5:1 | 2.0:1 | -     |
| VSWR output         | 1.1:1             | 1.7:1 | 2.2:1 | -     |
| DC Voltage          | 9                 | 12    | 15    | V     |
| Power Consumption   | -                 | 1.6   | -     | W     |
| RF Connectors       | SMA Female IN/OUT |       |       | -     |

Specifications at a case temperature of 25°C at 12V.

**Output Power at 1 dB Compression**

Figure 1-1 shows output power at 1dB compression measurement as a function of frequency at room temperature (25°C).

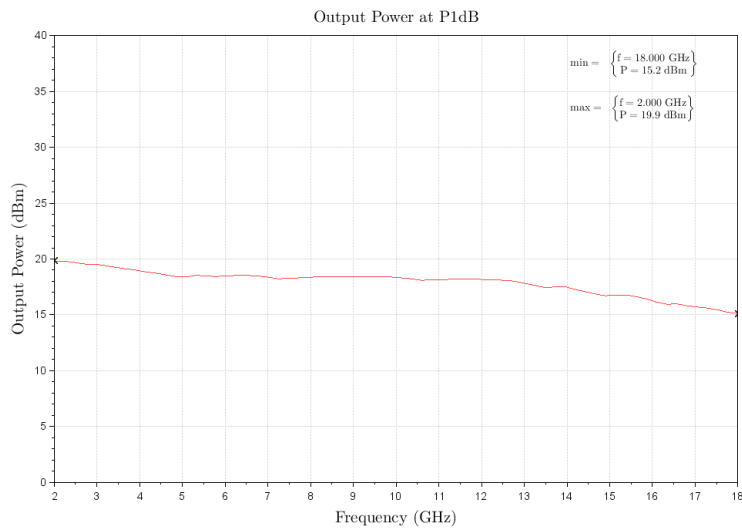


Figure 1-1: ERZ-LNA-0200-1800-30-2 P1dB

**Small Signal Gain**

Figure 1-2 shows the small signal gain measurement as a function of frequency at room temperature (25°C).

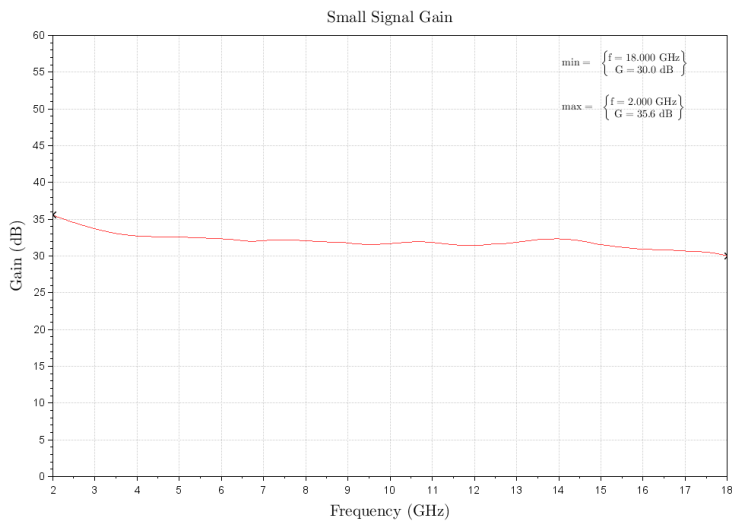


Figure 1-2: ERZ-LNA-0200-1800-30-2 Small Signal Gain

Noise Figure

Figure 1-3 shows the noise figure measurement as a function of frequency at room temperature (25°C).

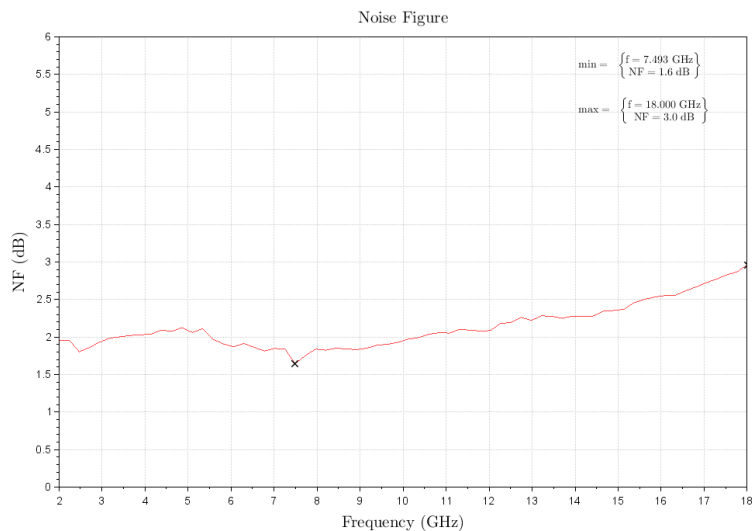


Figure 1-3: ERZ-LNA-0200-1800-30-2 Noise Figure

Input and Output Matching

Figure 1-4 shows input (S11) and output (S22) VSWR as a function of frequency at room temperature (25°C).

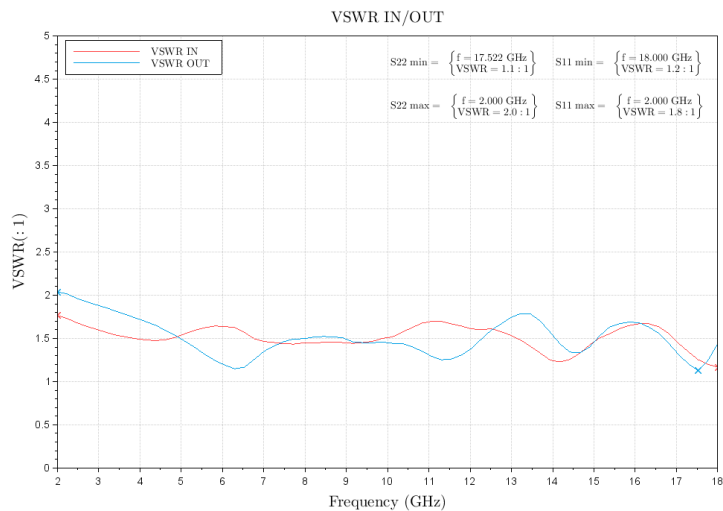


Figure 1-4: ERZ-LNA-0200-1800-30-2 Input & Output matching

Measurements Conditions

All measurements provided in this report were performed at the following conditions:

| Condition                   | Value      |
|-----------------------------|------------|
| Temperature                 | 25°C ± 1°C |
| Humidity                    | 44% ± 10%  |
| DUT Warm up time            | 30 min     |
| DUT minimum operating time  | 24 hours   |
| Test equipment warm up time | 2 hours    |

Absolute Maximum Ratings

| Condition                       | Value          |
|---------------------------------|----------------|
| DC Voltage                      | +15 VDC        |
| Maximum Input Power (CW)        | 18 dBm         |
| Operation temperatura (at case) | -40°C to 85°C  |
| Storage temperature             | -55°C to 125°C |

- Stress above these ratings may cause permanent damage to the device.
- It is final user responsibility to maintain the amplifier within the specified ranges.

Environmental Specifications (By Design)


|                        |                    |                              |
|------------------------|--------------------|------------------------------|
| Operating Temperature: | -45 to +85 °C      | (MIL-STD-810F, method 520.2) |
| Storage Temperature:   | -55 to 125 °C      | (MIL-STD-810F, method 520.2) |
| Vibration:             | 8g rms             | (MIL-STD-810F, method 514.5) |
| Shock:                 | 20g,11ms,saw-tooth | (MIL-STD-810F, method 516.5) |
| Acceleration:          | 15g                | (MIL-STD-810F, method 513.5) |

RoHS & REACH Compliance

This part is compliant with EU 2011/65/UE RoHS (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment) and REACH (Registration, Evaluation, Authorization and restriction of Chemical substances) directives.



## Mechanics and Housing

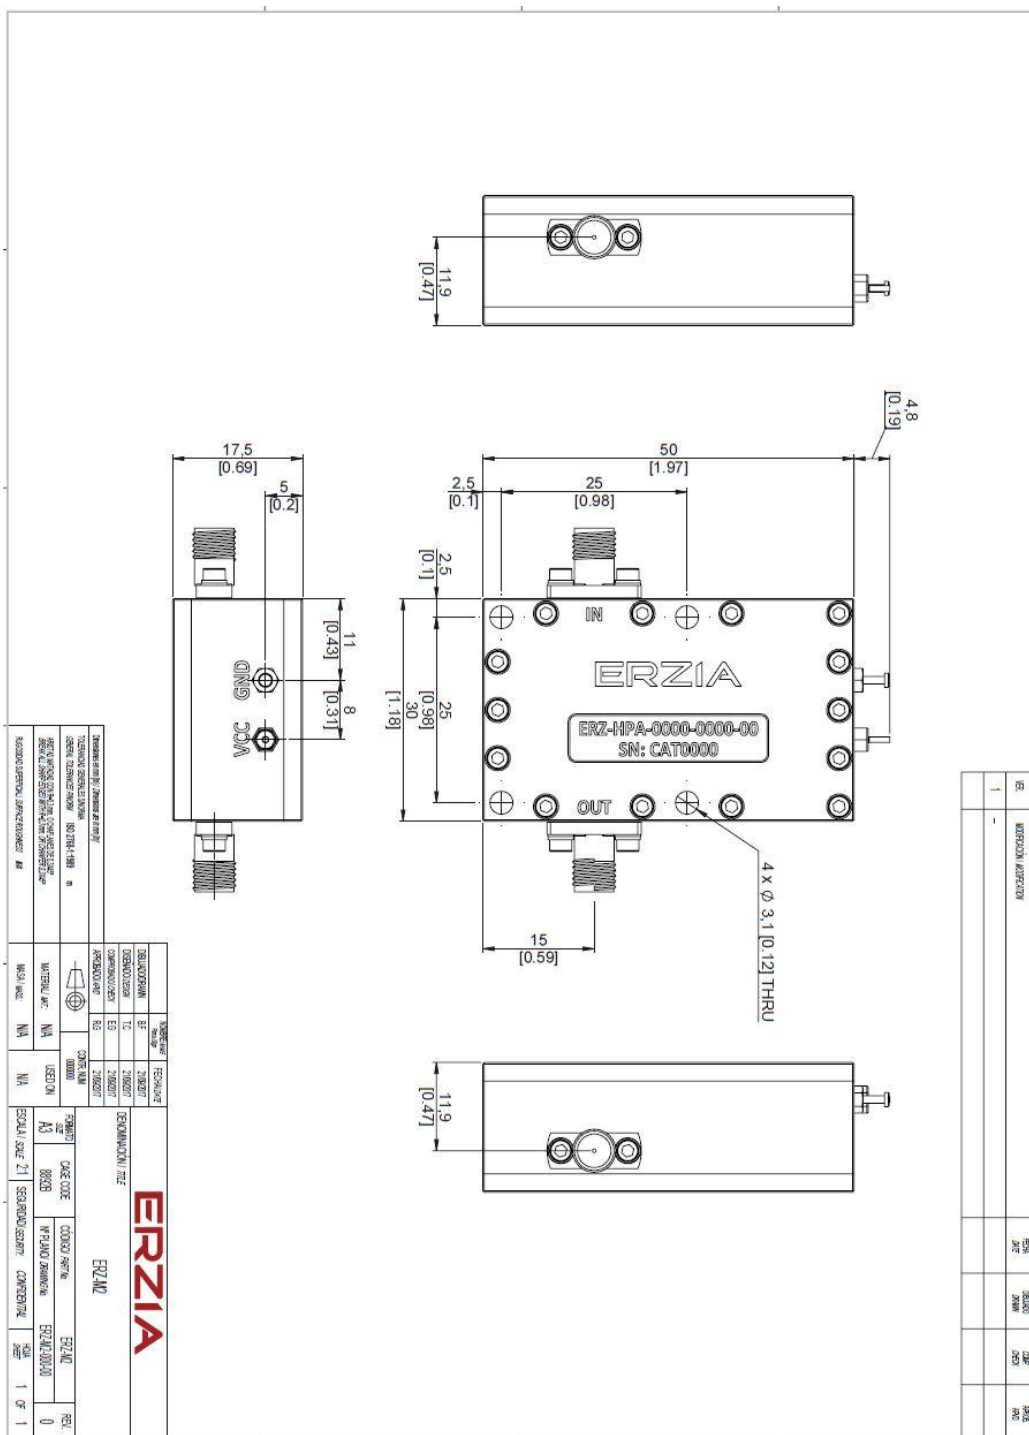

### Documentation and Test Reports

All modules are at least delivered with: Electrical Test Report, Certificate of Conformance, Certificate of Acceptance and Origin. Optionally, units can be environmentally tested (temperature, vibration...).

### Option (HS): Heat Sink

A heat sink (HS) can be provided to allow the operation of Power Amplifiers. Please note that most power amplifiers need heat sink or appropriate heat dissipation strategy.

### Space / Hi-Rel Usage


Most of ERZIA’s products are based on rad-hard technologies and can be manufactured and integrated according to MIL / ECSS or specific hi-rel standard-screening for space, aeronautics, or specific hi-reliability usage.

### Customization and Extended Performances

ERZIA can fully design or adapt one of the existing RF amplifiers designs according to your specifications. Please contact us for additional information.

### Model Number Codification

#### MODEL NUMBER

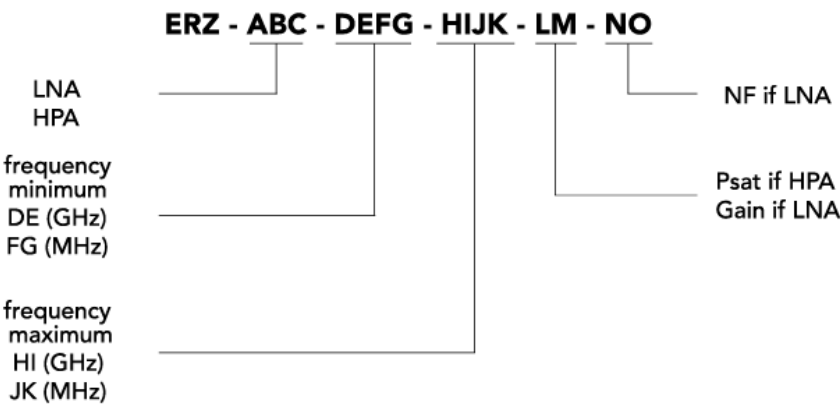

# ERZIA

20260818\_rev2.2

Copyright © 2025 ERZIA Technologies. All rights reserved. This information is commercial and indicative, subject to change without notice