



Main Features:

- Frequency Range: 23 to 37 GHz.
- Typical values: Gain 20 dB
- RF connectors (I/O): 2.92 mm
- Solder filtered pins for DC connection
- Several mounting options
- Gold plated compact aluminum housing
- Hi-reliability and dedicated screening/ environmental tests available under request

ERZ-HPA-2300-3700-27

The ERZ-HPA-2300-3700-27 is a Ka Band Amplifier providing up to 27 dBm at saturation and a gain of 20 dB. The compact size and modularity makes it ideal for a wide range of applications.

Typical applications:

- Industrial / Laboratory
- Satcom / Telecom
- Space / Aerospace / Military

Performance

Parameter	Value			Units
	Min	Typ	Max	
Frequency	23	-	37	GHz
Output Power (Psat)	26	27	28	dBm
Small Signal Gain	17	20	23	dB
Gain Flatness	-	±3	-	dB
Noise Figure	-	-	-	dB
VSWR input	1.1:1	1.5:1	1.8:1	-
VSWR output	1.3:1	1.5:1	1.6:1	-
DC Voltage	8	12	16	V
Power Consumption	-	9	-	W
Connectors	2.92 mm Female IN/OUT			-

Specifications at case temperature of 25°C

Saturated Output Power

Figure 1-1 shows the saturated output power measured as a function of frequency at room temperature (25°C).

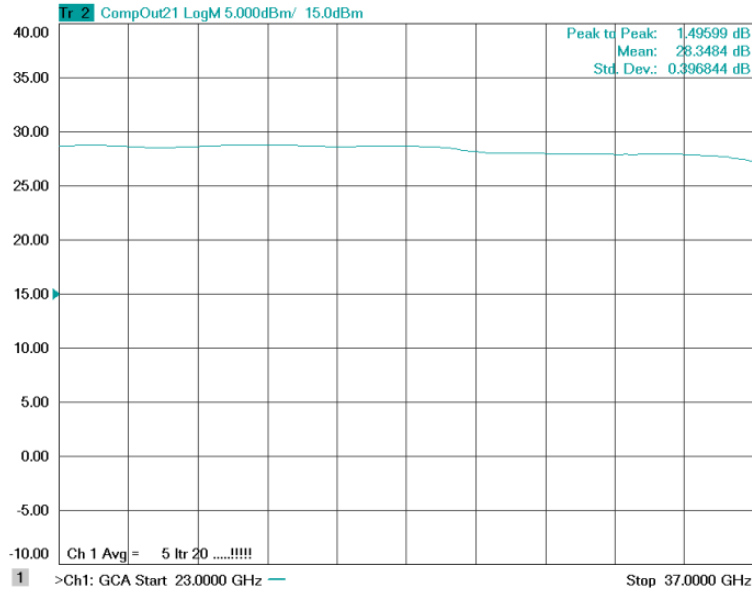


Figure 1-1: ERZ-HPA-2300-3700-27 Psat

Small Signal Gain

Figure 1-2 shows the small signal gain measured as a function of frequency at room temperature (25°C).

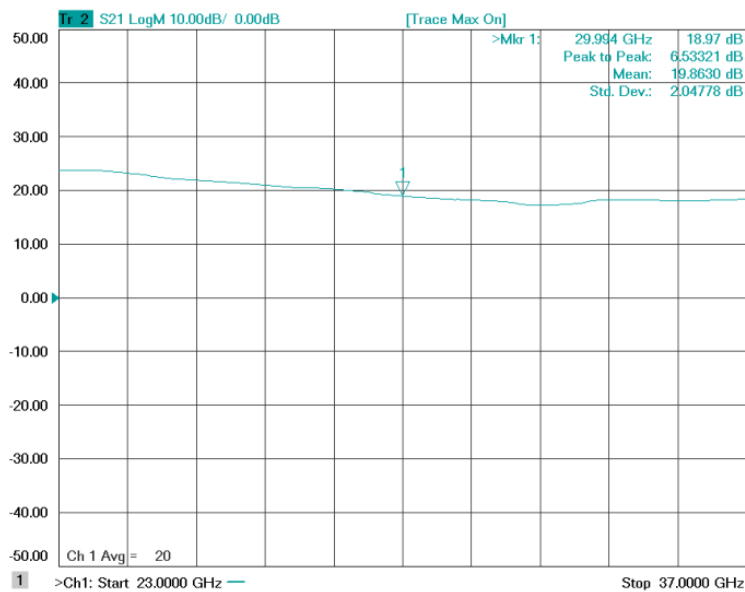


Figure 1-2: ERZ-HPA-2300-3700-27 Small Signal Gain

Input and Output Matching

Figure 1-4 and Figure 1-5 show input (S11) and output (S22) VSWR as a function of frequency at room temperature (25°C).

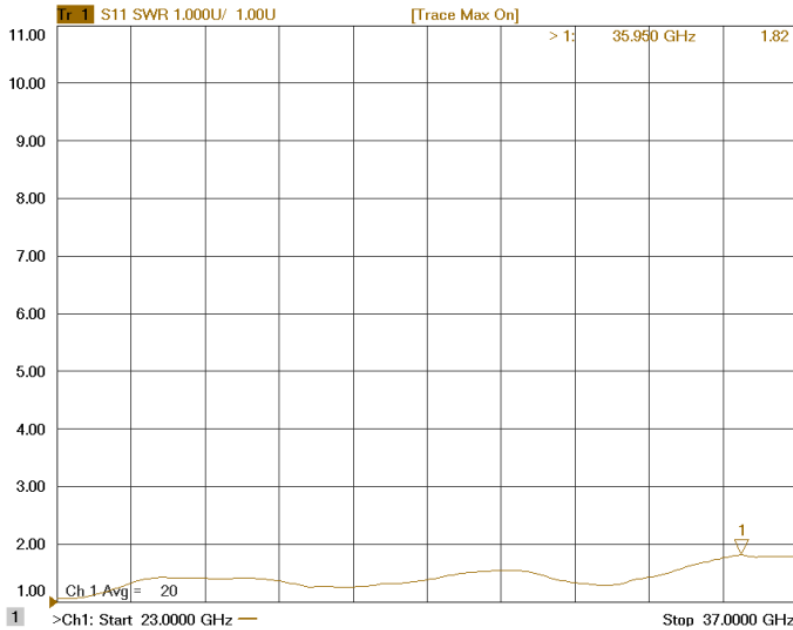


Figure 1-4: ERZ-HPA-2300-3700-27 Input Matching

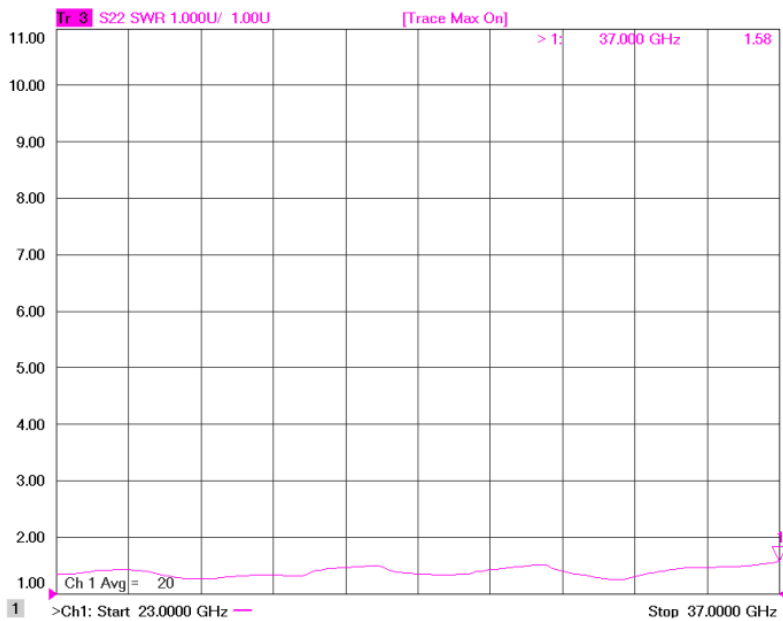


Figure 1-5: ERZ-HPA-2300-3700-27 Output Matching

Measurements Conditions

All measurements provided in this report were performed at the following conditions:


Condition	Value
Temperature	25°C ± 1°C
Humidity	70% ± 10%
DUT Warm up time	30 min
Test equipment warm up time	1 hour

Absolute Maximum Ratings

Condition	Value
DC Voltage	+20 VDC
Maximum Input Power (CW)	+15 dBm
Operation temperatura (at case)	-35°C to 70°C
Storage temperature	-45°C to 85°C

- Stress above these ratings may cause permanent damage to the device.
- It is final user responsibility to maintain the amplifier within the specified ranges.

Mechanics and Housing

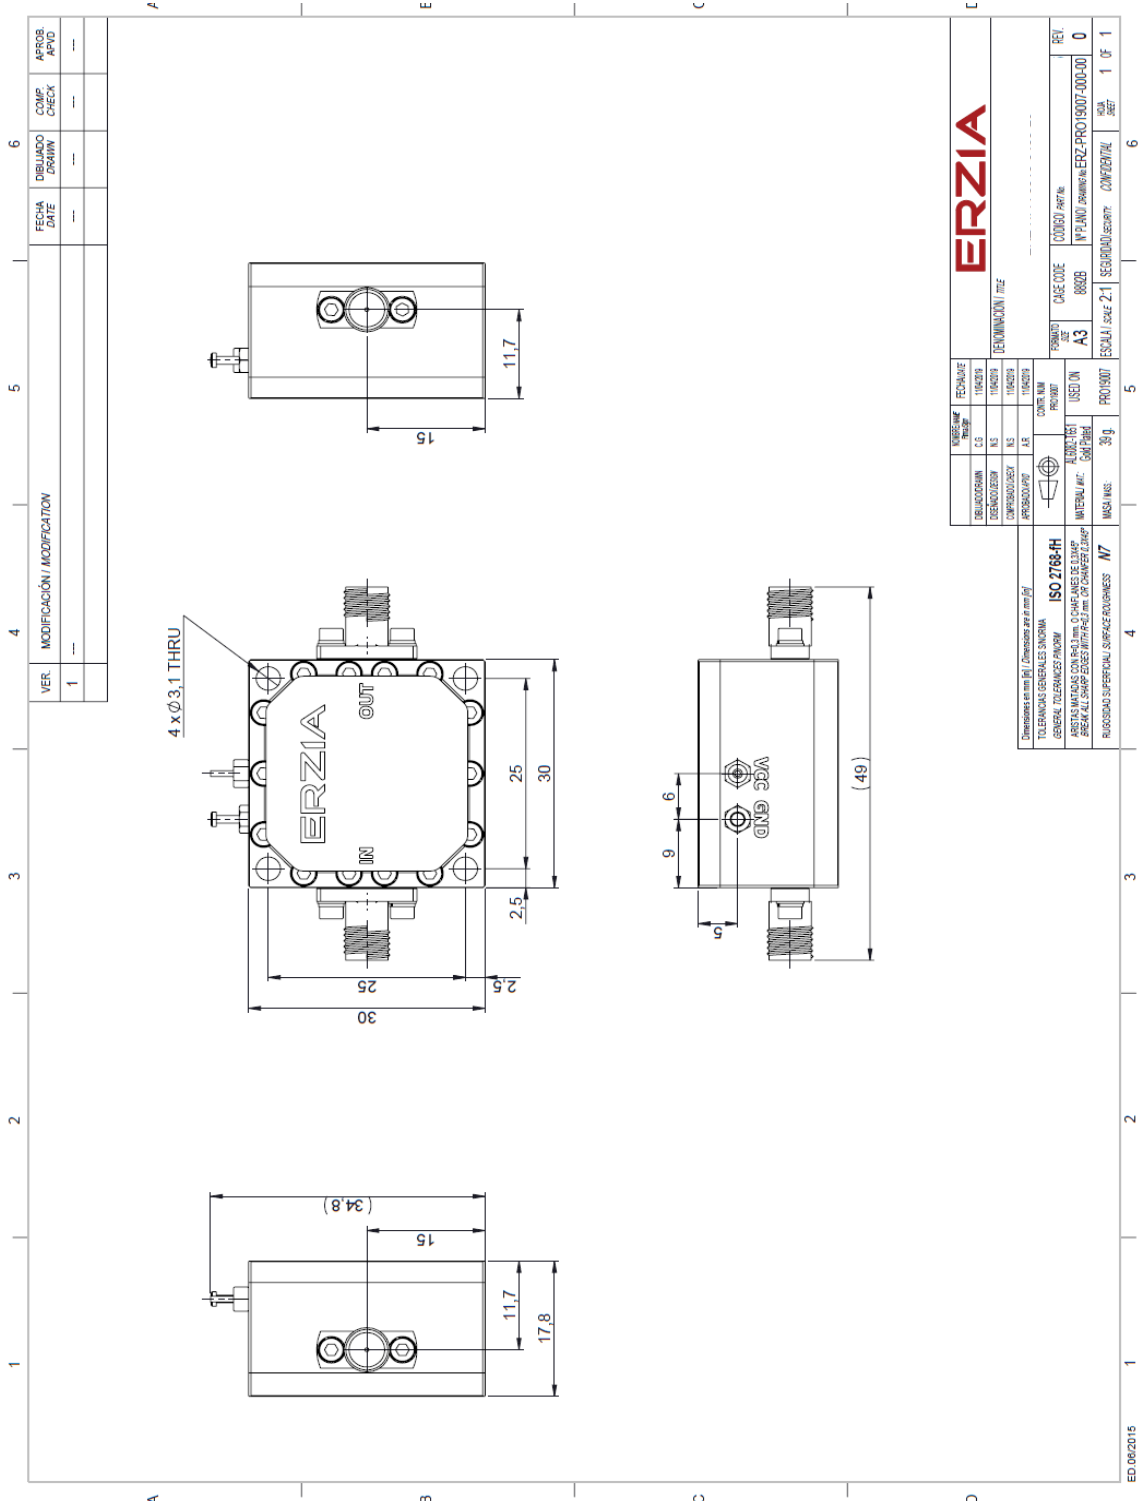

ED. 09/2015

Documentation and Test Reports

All modules are at least delivered with: Electrical Test Report, Certificate of Conformance, Certificate of Acceptance and Origin. Optionally, units can be environmentally tested (temperature, vibration...).

Option (HS): Heat Sink

A heat sink (HS) can be provided to allow the operation of Power Amplifiers. Please note that most power amplifiers need heat sink or appropriate heat dissipation strategy.

Space / Military Usage


Most of ERZIA's products are based on rad-hard technologies and can be manufactured and integrated according to MIL / ECSS or specific hi-rel standard-screening for space, aeronautics, military or specific hi-reliability usage.

Customization and Extended Performances

ERZIA can fully design or adapt one of the existing RF amplifiers designs according to your specifications. Please contact us for additional information.

Model Number Codification

MODEL NUMBER

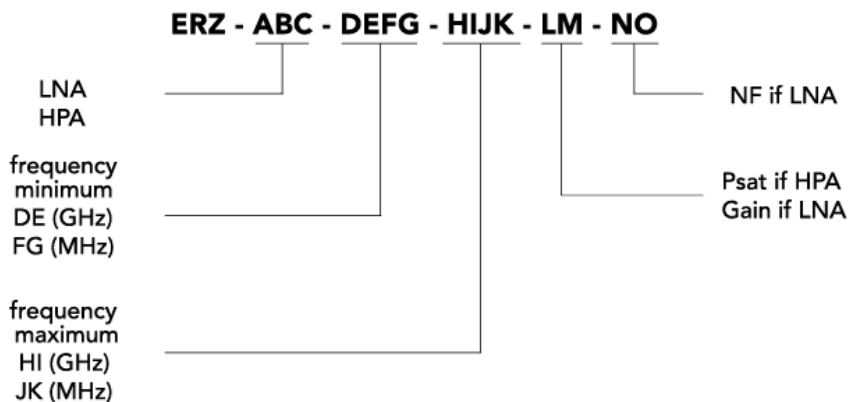

ERZIA

20150422_rev1.0

Copyright © 2015 Erzia Technologies. All rights reserved. This information is commercial and indicative, subject to change without notice

Tel: +34 942 76 46 45

sales.rf@erzia.com

www.erzia.com